99 00 10 40 35 30 01 24 25 55

RIM 70

Incassato con ghiera in acciaio Ø70
Recessed with steel ring nut Ø70

DESCRIZONE
DESCRIZONE

Rim, l'ultimo nato tra gli incassati Augenti, è un piccolo ma performante apparecchio da incasso con anello in acciaio. Le dimensioni ridotte e l'installazione semplice e veloce ne permettono la collocazione in ambienti esterni o interni. Rim può infatti essere installato a pavimento, parete o soffitto, integrandosi in modo discreto nell'ambiente, lasciando che la luce e l'atmosfera generate siano gli elementi principali della scena. I fasci proposti sono ideali per effetti morbidi o d'accento, per installazioni singole o in serie. L'anello in acciaio inox 316L ed il sistema AcquaStop per la protezione anti-condensa, rendono Rim un prodotto sicuro e poliedrico, ideale per dare luce alla vostra fantasia.

Rim, the latest of the Augenti recessed models, is a small but powerful recessed appliance with steel ring. The small size and quick and easy installation allow it to be placed in outdoor or indoor environments. Rim can be installed on the floor, wall or ceiling, integrating discreetly into the environment, leaving the light and atmosphere generated to be the main elements of the scene. The proposed beams are ideal for soft or accent effects, for single installations or in series. The 316L stainless steel ring and the AcquaStop system for anti-condensation protection, make Rim a safe and versatile product, ideal to give light to your imagination.

INSTALLAZIONE
INSTALLATION

Incasso a terra, parete o soffitto

Ground, wall or ceiling recessed

CORPO
BODY

Alluminio da tornitura Serie 6000 anticorodal, per maggiore resistenza alla corrosione

Anticorodal turning aluminum 6000 Series, for greater corrosion resistance

BOX
BOX

Polipropilene (PP) 30% fibra stabilizzata UV GWT750

Polypropylene (PP) 30% fiber UV stabilized GWT750

SCHERMO
SCREEN

Vetro extrachiaro temprato 6 mm

Extra clear tempered glass 6 mm

GUARNIZIONI
SEALS

EPDM

EPDM

CORNICE
FRAME

Acciaio AISI316L

Stainless steel AISI316L

VERNICIATURA
FINISHING

Polvere poliestere stabilizzata ai raggi UV con trattamento anticorrosione

Anti-corrosive UV stabilized polyester powder

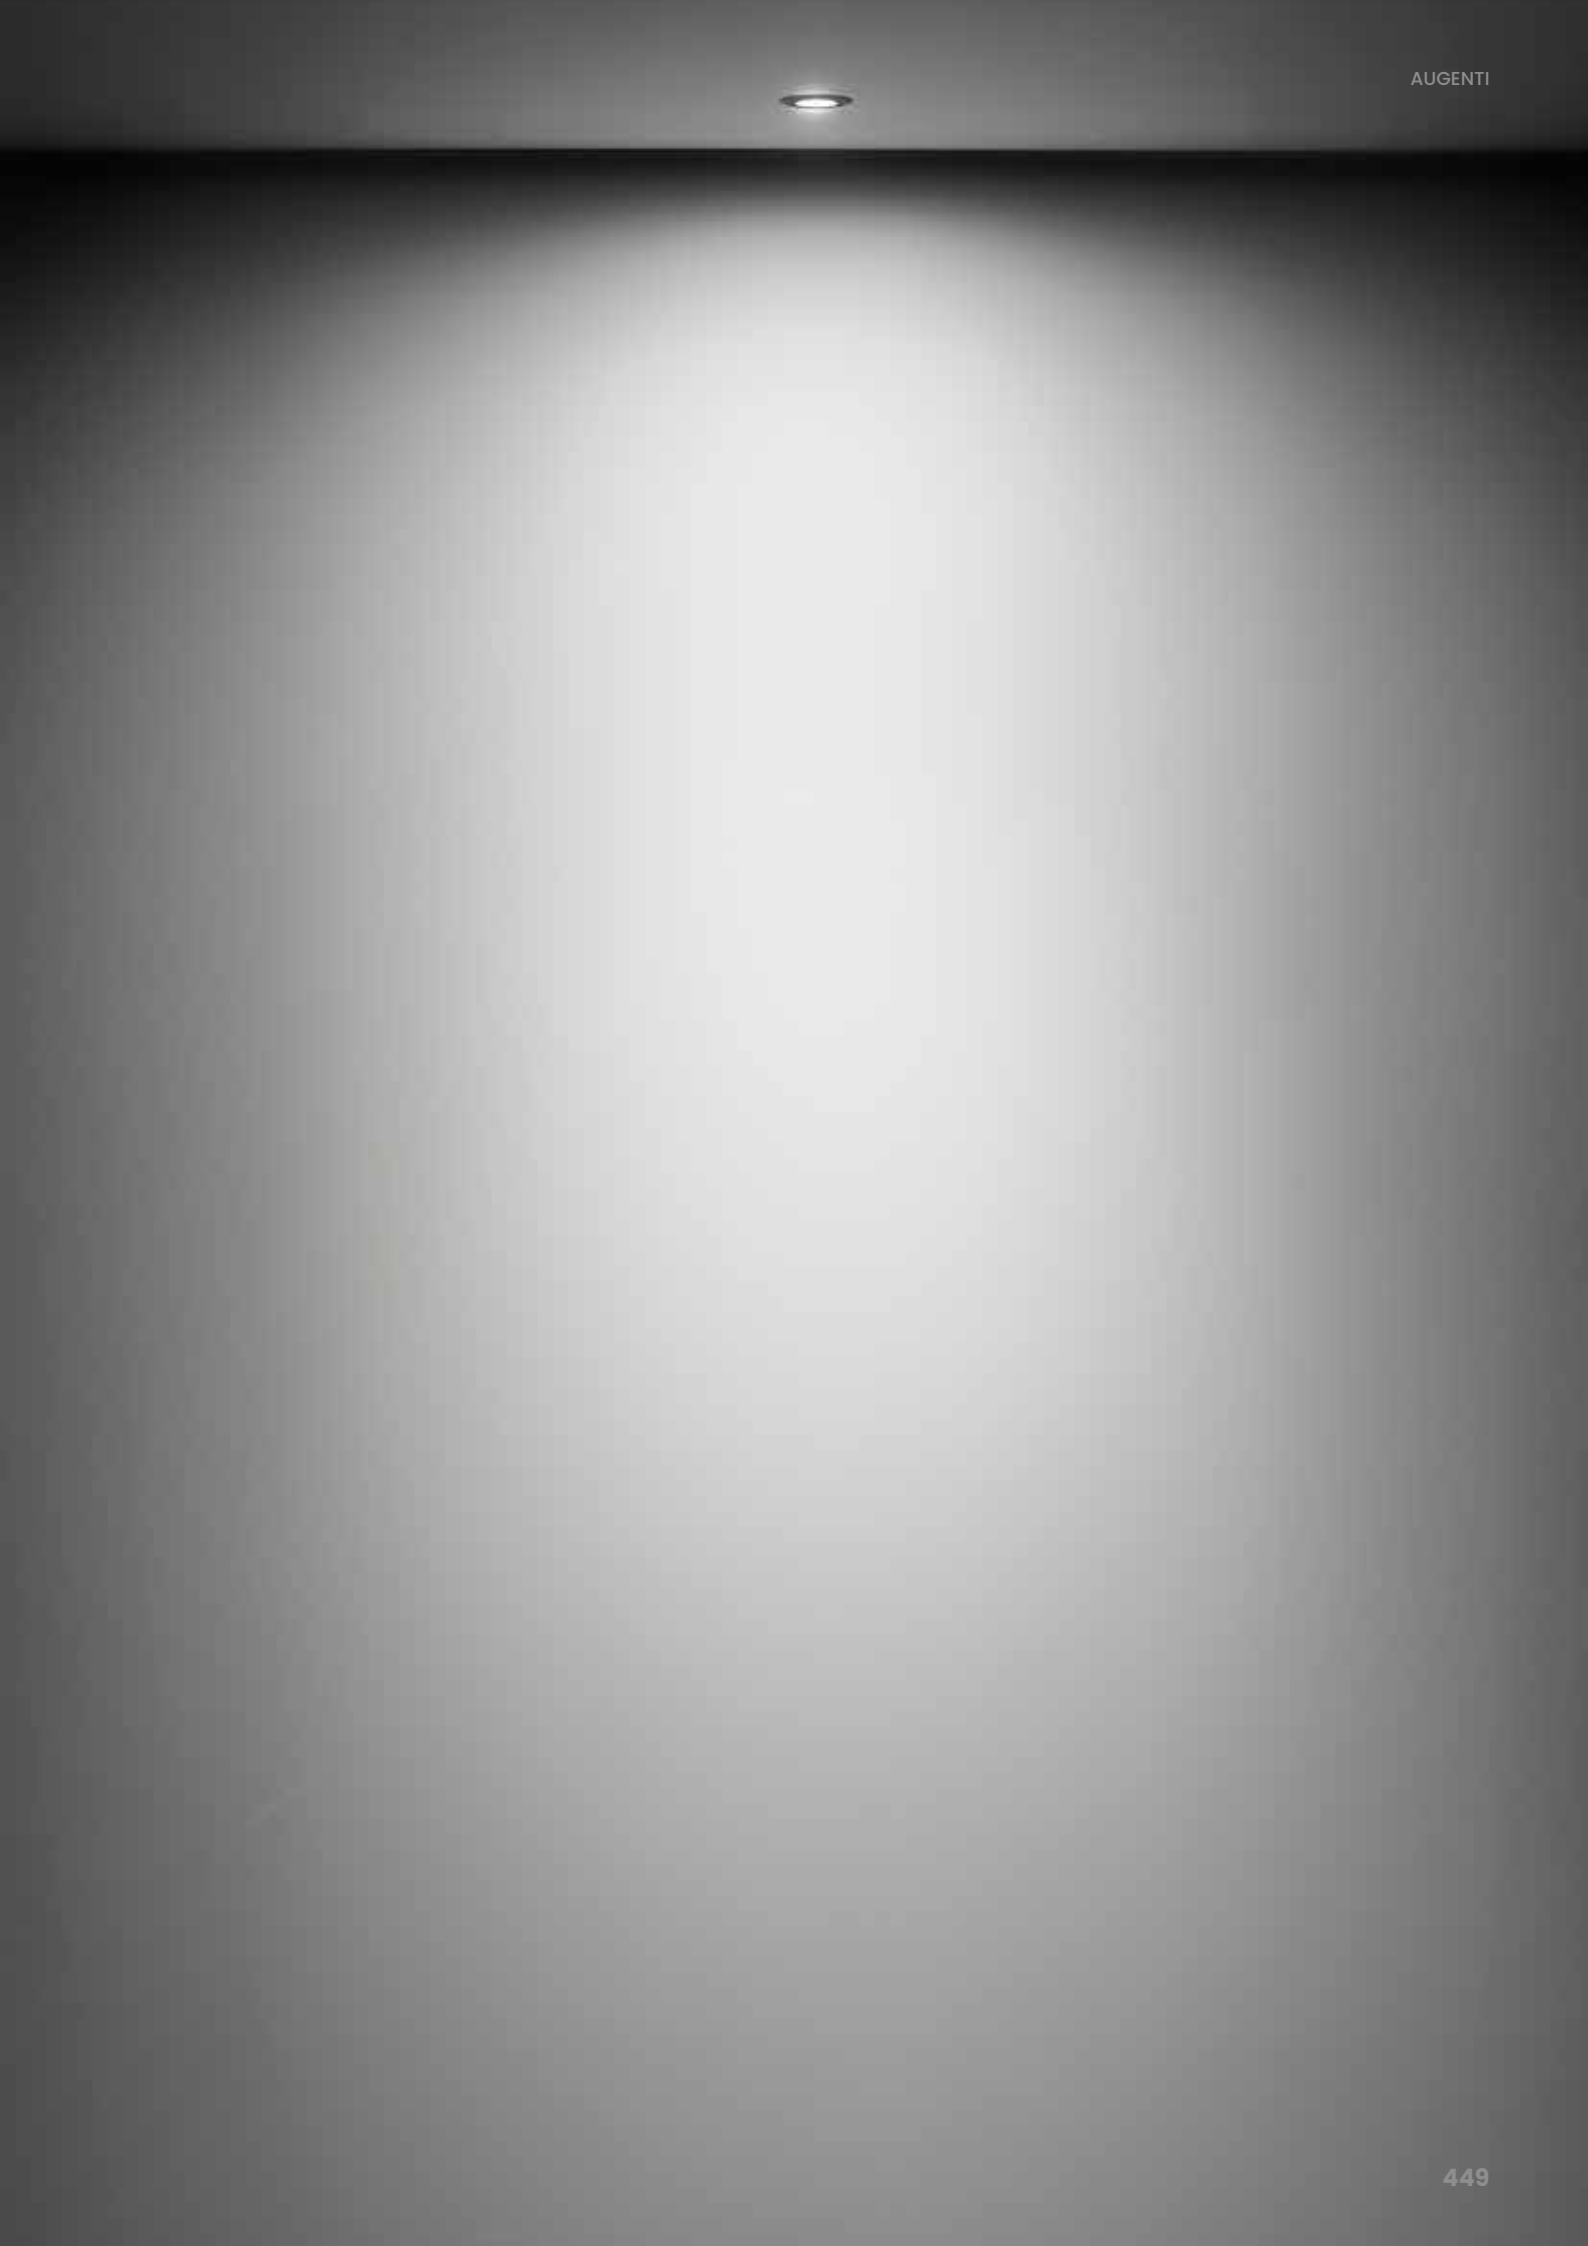

CONFIG. CODICE
CODE CONFIG.

▲ → **H=2700K**
W=3000K
N=4000K

VERSIONE IN TENSIONE
CONSTANT VOLTAGE

6W CON DRIVER REMOTO 24Vdc
6W REMOTE DRIVER 24Vdc

VERSIONE IN CORRENTE
CONSTANT CURRENT

6W CON DRIVER REMOTO MAX 500mA DC
6W REMOTE DRIVER MAX 500mA DC



IP 67 | IK 08 | HUB SYSTEM

RIM 70

INCASSO CON GHIERA IN ACCIAIO Ø70
24VDC

RECESSED WITH STEEL RING NUT Ø70
24VDC

CODICE *CODE*	FASCIO *BEAM*	WATT	SORGENTE *SOURCE*	APPARECCHIO *FIXTURE*	ALIMENTAZIONE *POWER SUPPLY*	CL	IP	IK	CRI
3070C/▲RRCNB99	STRETTO/10° *NARROW/10°*	6W	690 lm	520 lm	24Vdc	III	67	08	80
3070C/▲RRCMB99	MEDIO/24° *MEDIUM/24°*	6W	690 lm	510 lm	24Vdc	III	67	08	80
3070C/▲RRCWB99	LARGO/36° *WIDE/36°*	6W	690 lm	505 lm	24Vdc	III	67	08	80
3070C/▲RRCSW99	MOLTO LARGO/60° *SUPER WIDE/60°*	6W	690 lm	508 lm	24Vdc	III	67	08	80
3070C/▲RRCOB99	OVALE/15°X55° *OVAL/15°X55°*	6W	690 lm	554 lm	24Vdc	III	67	08	80

VETRO EXTRACHIARO TRASPARENTE TEMPRATO 8 MM - EXTRA CLEAR TRANSPARENT TEMPERED GLASS 8 MM

ON/OFF

INCASSO CON GHIERA IN ACCIAIO VETRO OPALE Ø70
24VDC

RECESSED WITH STEEL RING NUT OPAL GLASS Ø70
24VDC

CODICE *CODE*	FASCIO *BEAM*	WATT	SORGENTE *SOURCE*	APPARECCHIO *FIXTURE*	ALIMENTAZIONE *POWER SUPPLY*	CL	IP	IK	CRI
3070C/▲RRCVS99	DIFFUSO/120° *DIFFUSED/120°*	6W	690 lm	70 lm	24Vdc	III	67	08	80

VETRO EXTRACHIARO OPALE TEMPRATO 8 MM - EXTRA CLEAR OPAL TEMPERED GLASS 8 MM

ON/OFF

ACCESSORI

ACCESSORIES

MOR682P/2V	CONNETTORE IP68 2POLI/2VIE 2 X 1 MM² CONNECTOR IP68 2POLES/2WAYS 2 X 1 MM²	**E.TRA.577** 1 DRIVER FOR 1-3 LAMPS	ALIMENTATORE ON/OFF 25W 24VDC IP67 DRIVER ON/OFF 25W 24VDC IP67
E.TRA.631 1 DRIVER FOR 1-2 LAMPS	ALIMENTATORE ON/OFF 15W 24VDC IP20 DRIVER ON/OFF 15W 24VDC IP20	**E.TRA.579** 1 DRIVER FOR 4-12 LAMPS	ALIMENTATORE ON/OFF 100W 24VDC IP67 DRIVER ON/OFF 100W 24VDC IP67
E.TRA.632 1 DRIVER FOR 1-8 LAMPS	ALIMENTATORE ON/OFF 70W 24VDC IP20 DRIVER ON/OFF 70W 24VDC IP20	**HUB.24V.001.ND** 1 HUB FOR 1-8 LAMPS	HUB 70W 24VDC IP66 ON/OFF HUB 70W 24VDC IP66 ON/OFF

INCASSO CON GHIERA IN ACCIAIO Ø70
MAX 500MA

RECESSED WITH STEEL RING NUT Ø70
MAX 500MA

CODICE *CODE*	FASCIO *BEAM*	WATT	SORGENTE *SOURCE*	APPARECCHIO *FIXTURE*	ALIMENTAZIONE *POWER SUPPLY*	CL	IP	IK	CRI
3070C/▲RCCNB99	STRETTO/10° *NARROW/10°*	6W	690 lm	520 lm	max 500mA	III	67	08	80
3070C/▲RCCMB99	MEDIO/24° *MEDIUM/24°*	6W	690 lm	510 lm	max 500mA	III	67	08	80
3070C/▲RCCWB99	LARGO/36° *WIDE/36°*	6W	690 lm	505 lm	max 500mA	III	67	08	80
3070C/▲RCCSW99	MOLTO LARGO/60° *SUPER WIDE/60°*	6W	690 lm	508 lm	max 500mA	III	67	08	80
3070C/▲RCCOB99	OVALE/15°X55° *OVAL/15°X55°*	6W	690 lm	554 lm	max 500mA	III	67	08	80

VETRO EXTRACHIARO TRASPARENTE TEMPRATO 8 MM - EXTRA CLEAR TRANSPARENT TEMPERED GLASS 8 MM

DIMMERABILE - DIMMABLE

INCASSO CON GHIERA IN ACCIAIO VETRO OPALE Ø70
MAX 500MA

RECESSED WITH STEEL RING NUT OPAL GLASS Ø70
MAX 500MA

CODICE *CODE*	FASCIO *BEAM*	WATT	SORGENTE *SOURCE*	APPARECCHIO *FIXTURE*	ALIMENTAZIONE *POWER SUPPLY*	CL	IP	IK	CRI
3070C/▲RCCVS99	DIFFUSO/120° *DIFFUSED/120°*	6W	690 lm	70 lm	max 500mA	III	67	08	80

VETRO EXTRACHIARO OPALE TEMPRATO 8 MM - EXTRA CLEAR OPAL TEMPERED GLASS 8 MM

DIMMERABILE - DIMMABLE

ACCESSORI

ACCESSORIES

MOR682P/2V	CONNETTORE IP68 2POLI/2VIE 2 X 1 MM² CONNECTOR IP68 2POLES/2WAYS 2 X 1 MM²	**E.TRA.658.500** 1 DRIVER FOR 1-3 LAMPS	ALIMENTATORE ON/OFF 23W 500MA IP67 DRIVER ON/OFF 23W 500MA IP67
E.TRA.621.500 1 DRIVER FOR 1-3 LAMPS	ALIMENTATORE ON/OFF 20W 500MA IP20 DRIVER ON/OFF 20W 500MA IP20	**E.TRA.659.500** 1 DRIVER FOR 1-3 LAMPS	ALIMENTATORE DALI2 23W 500MA IP67 DRIVER DALI2 23W 500MA IP67
E.TRA.623.500 1 DRIVER FOR 1-4 LAMPS	ALIMENTATORE ON/OFF 36W 500MA IP20 DRIVER ON/OFF 36W 500MA IP20	**HUB.500.001.ND** 1 HUB FOR 1-5 LAMPS	HUB 500MA IP66 ON/OFF CON DRIVER 60W IP20 HUB 500MA IP66 ON/OFF WITH DRIVER 60W IP20
E.TRA.634.500 1 DRIVER FOR 1-5 LAMPS	ALIMENTATORE ON/OFF 60W 500MA IP20 DRIVER ON/OFF 60W 500MA IP20	**HUB.500.001.DA2** 1 HUB FOR 1-5 LAMPS	HUB 500MA IP66 DALI-2 CON DRIVER 60W IP20 HUB 500MA IP66 DALI-2 WITH DRIVER 60W IP20
E.TRA.635.500 1 DRIVER FOR 1-5 LAMPS	ALIMENTATORE DALI2 60W 500MA IP20 DRIVER DALI2 60W 500MA IP20	**HUB.500.001.CA** 1 HUB FOR 1-5 LAMPS	HUB 500MA IP66 CASAMBI CON DRIVER 60W IP20 HUB 500MA IP66 CASAMBI WITH DRIVER 60W IP20
E.TRA.636.500 1 DRIVER FOR 1-5 LAMPS	ALIMENTATORE CASAMBI 60W 500MA IP20 DRIVER CASAMBI 60W 500MA IP20		

RIM 70 PAINTED

INCASSO CON GHIERA IN ACCIAIO VERNICIATO Ø70 24VDC

RECESSED WITH PAINTED STEEL RING NUT Ø70 24VDC

CODICE *CODE*	FASCIO *BEAM*	WATT	SORGENTE *SOURCE*	APPARECCHIO *FIXTURE*	ALIMENTAZIONE *POWER SUPPLY*	CL	IP	IK	CRI
3070C/▲RRCNB	STRETTO/10° *NARROW/10°*	6W	690 lm	520 lm	24Vdc	III	67	08	80
3070C/▲RRCMB	MEDIO/24° *MEDIUM/24°*	6W	690 lm	510 lm	24Vdc	III	67	08	80
3070C/▲RRCWB	LARGO/36° *WIDE/36°*	6W	690 lm	505 lm	24Vdc	III	67	08	80
3070C/▲RRCSW	MOLTO LARGO/60° *SUPER WIDE/60°*	6W	690 lm	508 lm	24Vdc	III	67	08	80
3070C/▲RRCOB	OVALE/15°X55° *OVAL/15°X55°*	6W	690 lm	554 lm	24Vdc	III	67	08	80

VETRO EXTRACHIARO TRASPARENTE TEMPRATO 8 MM - EXTRA CLEAR TRANSPARENT TEMPERED GLASS 8 MM

ON/OFF

INCASSO CON GHIERA IN ACCIAIO VERNICIATO VETRO OPALE Ø70 24VDC

RECESSED WITH PAINTED STEEL RING NUT OPAL GLASS Ø70 24VDC

CODICE *CODE*	FASCIO *BEAM*	WATT	SORGENTE *SOURCE*	APPARECCHIO *FIXTURE*	ALIMENTAZIONE *POWER SUPPLY*	CL	IP	IK	CRI
3070C/▲RRCVS	DIFFUSO/120° *DIFFUSED/120°*	6W	690 lm	70 lm	24Vdc	III	67	08	80

VETRO EXTRACHIARO OPALE TEMPRATO 8 MM - EXTRA CLEAR OPAL TEMPERED GLASS 8 MM

ON/OFF

ACCESSORI

ACCESSORIES

MOR682P/2V	CONNETTORE IP68 2POLI/2VIE 2 X 1 MM² CONNECTOR IP68 2POLES/2WAYS 2 X 1 MM²	**E.TRA.577** 1 DRIVER FOR 1-3 LAMPS	ALIMENTATORE ON/OFF 25W 24VDC IP67 DRIVER ON/OFF 25W 24VDC IP67
E.TRA.631 1 DRIVER FOR 1-2 LAMPS	ALIMENTATORE ON/OFF 15W 24VDC IP20 DRIVER ON/OFF 15W 24VDC IP20	**E.TRA.579** 1 DRIVER FOR 4-12 LAMPS	ALIMENTATORE ON/OFF 100W 24VDC IP67 DRIVER ON/OFF 100W 24VDC IP67
E.TRA.632 1 DRIVER FOR 1-8 LAMPS	ALIMENTATORE ON/OFF 70W 24VDC IP20 DRIVER ON/OFF 70W 24VDC IP20	**HUB.24V.001.ND** 1 HUB FOR 1-8 LAMPS	HUB 70W 24VDC IP66 ON/OFF HUB 70W 24VDC IP66 ON/OFF

INCASSO CON GHIERA IN ACCIAIO VERNICIATO Ø70 MAX 500MA

RECESSED WITH PAINTED STEEL RING NUT Ø70 MAX 500MA

CODICE *CODE*	FASCIO *BEAM*	WATT	SORGENTE *SOURCE*	APPARECCHIO *FIXTURE*	ALIMENTAZIONE *POWER SUPPLY*	CL	IP	IK	CRI
3070C/▲RCCNB	STRETTO/10° *NARROW/10°*	6W	690 lm	520 lm	max 500mA	III	67	08	80
3070C/▲RCCMB	MEDIO/24° *MEDIUM/24°*	6W	690 lm	510 lm	max 500mA	III	67	08	80
3070C/▲RCCWB	LARGO/36° *WIDE/36°*	6W	690 lm	505 lm	max 500mA	III	67	08	80
3070C/▲RCCSW	MOLTO LARGO/60° *SUPER WIDE/60°*	6W	690 lm	508 lm	max 500mA	III	67	08	80
3070C/▲RCCOB	OVALE/15°X55° *OVAL/15°X55°*	6W	690 lm	554 lm	max 500mA	III	67	08	80

VETRO EXTRACHIARO TRASPARENTE TEMPRATO 8 MM - EXTRA CLEAR TRANSPARENT TEMPERED GLASS 8 MM

DIMMERABILE - DIMMABLE

INCASSO CON GHIERA IN ACCIAIO VERNICIATO VETRO OPALE Ø70 MAX 500MA

RECESSED WITH PAINTED STEEL RING NUT OPAL GLASS Ø70 MAX 500MA

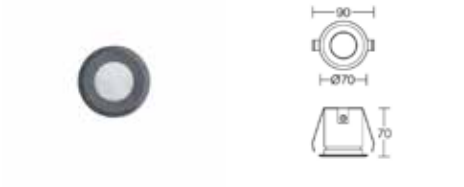

CODICE *CODE*	FASCIO *BEAM*	WATT	SORGENTE *SOURCE*	APPARECCHIO *FIXTURE*	ALIMENTAZIONE *POWER SUPPLY*	CL	IP	IK	CRI
3070C/▲RCCVS	DIFFUSO/120° *DIFFUSED/120°*	6W	690 lm	70 lm	max 500mA	III	67	08	80

VETRO EXTRACHIARO OPALE TEMPRATO 8 MM - EXTRA CLEAR OPAL TEMPERED GLASS 8 MM

DIMMERABILE - DIMMABLE

ACCESSORI

ACCESSORIES

MOR682P/2V	CONNETTORE IP68 2POLI/2VIE 2 X 1 MM² CONNECTOR IP68 2POLES/2WAYS 2 X 1 MM²	**E.TRA.658.500** 1 DRIVER FOR 1-3 LAMPS	ALIMENTATORE ON/OFF 23W 500MA IP67 DRIVER ON/OFF 23W 500MA IP67
E.TRA.621.500 1 DRIVER FOR 1-3 LAMPS	ALIMENTATORE ON/OFF 20W 500MA IP20 DRIVER ON/OFF 20W 500MA IP20	**E.TRA.659.500** 1 DRIVER FOR 1-3 LAMPS	ALIMENTATORE DALI2 23W 500MA IP67 DRIVER DALI2 23W 500MA IP67
E.TRA.623.500 1 DRIVER FOR 1-4 LAMPS	ALIMENTATORE ON/OFF 36W 500MA IP20 DRIVER ON/OFF 36W 500MA IP20	**HUB.500.001.ND** 1 HUB FOR 1-5 LAMPS	HUB 500MA IP66 ON/OFF CON DRIVER 60W IP20 HUB 500MA IP66 ON/OFF WITH DRIVER 60W IP20
E.TRA.634.500 1 DRIVER FOR 1-5 LAMPS	ALIMENTATORE ON/OFF 60W 500MA IP20 DRIVER ON/OFF 60W 500MA IP20	**HUB.500.001.DA2** 1 HUB FOR 1-5 LAMPS	HUB 500MA IP66 DALI-2 CON DRIVER 60W IP20 HUB 500MA IP66 DALI-2 WITH DRIVER 60W IP20
E.TRA.635.500 1 DRIVER FOR 1-5 LAMPS	ALIMENTATORE DALI2 60W 500MA IP20 DRIVER DALI2 60W 500MA IP20	**HUB.500.001.CA** 1 HUB FOR 1-5 LAMPS	HUB 500MA IP66 CASAMBI CON DRIVER 60W IP20 HUB 500MA IP66 CASAMBI WITH DRIVER 60W IP20
E.TRA.636.500 1 DRIVER FOR 1-5 LAMPS	ALIMENTATORE CASAMBI 60W 500MA IP20 DRIVER CASAMBI 60W 500MA IP20		

ACCESSORI
ACCESSORIES

CONNETTORI
CONNECTORS

MOR682P/2V

Connettore IP68 2Poli/2Vie 2 x 1 mm²
Connector IP68 2Poles/2Ways 2 x 1 mm²
L 72 x Ø 22

ALIMENTATORI 24Vdc
DRIVER 24Vdc

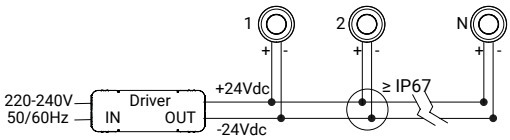

Collegamento in Parallelo
Parallel Wiring

E.TRA.577
1 Driver for 1-3 Lamps

Alimentatore ON/OFF 25W 24Vdc IP67
Driver ON/OFF 25W 24Vdc IP67
L 148 x W 40 x H 32

E.TRA.579
1 Driver for 4-12 Lamps

Alimentatore ON/OFF 100W 24Vdc IP67
Driver ON/OFF 100W 24Vdc IP67
L 140 x W 63 x H 32

E.TRA.631
1 Driver for 1-2 Lamps

Alimentatore ON/OFF 15W 24Vdc IP20
Driver ON/OFF 15W 24Vdc IP20
L 106 x W 33 x H 22

E.TRA.632
1 Driver for 1-8 Lamps

Alimentatore ON/OFF 70W 24Vdc IP20
Driver ON/OFF 70W 24Vdc IP20
L 124 x W 80 x H 22

HUB - SISTEMI DI CONNESSIONE SEMPLIFICATA 24Vdc
HUB - READY TO CONNECT SYSTEM 24Vdc

HUB.24V.001.ND
1 Hub for 1-8 Lamps

Hub 70W 24Vdc IP66 ON/OFF
Hub 70W 24Vdc IP66 ON/OFF
L 235 x W 200 x H 92



ALIMENTATORI CC - 500mA

DRIVER CC - 500mA



Collegamento in Serie
Series Wiring

E.TRA.621.500
1 Driver for 1-3 Lamps

Alimentatore ON/OFF 20W 500mA IP20
Driver ON/OFF 20W 500mA IP20
L 111 x W 52 x H 22

E.TRA.623.500
1 Driver for 1-4 Lamps

Alimentatore ON/OFF 36W 500mA IP20
Driver ON/OFF 36W 500mA IP20
L 163 x W 30 x H 21

E.TRA.634.500
1 Driver for 1-5 Lamps

Alimentatore ON/OFF 60W 500mA IP20
Driver ON/OFF 60W 500mA IP20
L 124 x W 80 x H 22

E.TRA.635.500
1 Driver for 1-5 Lamps

Alimentatore DALI2 60W 500mA IP20
Driver DALI2 60W 500mA IP20
L 124 x W 80 x H 22

E.TRA.636.500
1 Driver for 1-5 Lamps

Alimentatore CASAMBI 60W 500mA IP20
Driver CASAMBI 60W 500mA IP20
L 124 x W 80 x H 22

E.TRA.658.500
1 Driver for 1-3 Lamps

Alimentatore ON/OFF 23W 500mA IP67
Driver ON/OFF 23W 500mA IP67
L 124 x W 47 x H 26

E.TRA.659.500
1 Driver for 1-3 Lamps

Alimentatore DALI2 23W 500mA IP67
Driver DALI2 23W 500mA IP67
L 124 x W 47 x H 26

HUB - SISTEMI DI CONNESSIONE SEMPLIFICATA CC 500mA

HUB - READY TO CONNECT SYSTEM CC 500mA

HUB.500.001.CA
1 Hub for 1-5 Lamps

Hub 500mA IP66 CASAMBI con driver 60W IP20
Hub 500mA IP66 CASAMBI with driver 60W IP20
L 235 x W 200 x H 92

HUB.500.001.DA2
1 Hub for 1-5 Lamps

Hub 500mA IP66 DALI-2 con driver 60W IP20
Hub 500mA IP66 DALI-2 with driver 60W IP20
L 235 x W 200 x H 92

HUB.500.001.ND
1 Hub for 1-5 Lamps
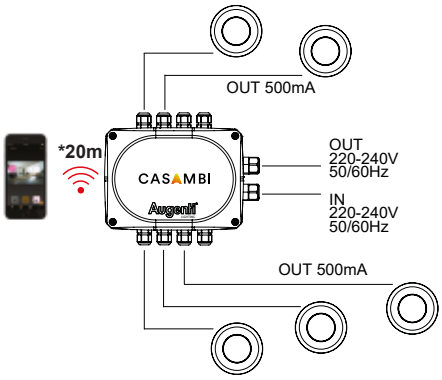
Hub 500mA IP66 ON/OFF con driver 60W IP20
Hub 500mA IP66 ON/OFF with driver 60W IP20
L 235 x W 200 x H 92