



PLAIN

Apparecchi da incasso per illuminazione architettonica
Architectural recessed lights

DESCRIZIONE *DESCRIZIONE*

Abbiamo progettato Plain partendo da dei punti chiave imprescindibili: installazione rapida e sicura, elevata dissipazione, protezione anti-condensa, manutenzione semplice e veloce. Gli accorgimenti tecnici del prodotto permettono l'installazione e l'utilizzo di Plain in molteplici progetti ed in totale sicurezza, garantendone praticità, adattabilità e durata nel tempo grazie alla struttura ed ai materiali utilizzati. Inoltre, la miscelazione e la pulizia dei fasci luminosi, ottenuti attraverso un'accurata scelta delle ottiche, conferiscono a Plain gli elementi definitivi per renderlo un prodotto largamente collocabile ed altamente performante. Disponibile anche la versione con ottica orientabile e RGBW.

We designed Plain starting from some essential key points: fast and safe installation, high dissipation, anti-condensation protection, simple and quick maintenance. The technical features of the product allow the installation and use of Plain in multiple projects and in total safety, guaranteeing practicality, adaptability and durability thanks to the structure and materials used. In addition, the mixing and cleaning of the light beams, obtained through a careful choice of optics, give Plain the final elements to make it a widely applicable product and high performance. Also available with adjustable optics and RGBW version.

INSTALLAZIONE *INSTALLATION*

Incasso a terra

Ground recessed

CORPO *BODY*

Corpo illuminante: Alluminio pressofuso
Carter per elettronica: Poliammide

*Lighting body: Die-cast aluminum
Electronics housing: Polyamide*

BOX *BOX*

Polipropilene (PP) 30% fibra stabilizzata UV
GWT750

*Polypropylene (PP) 30% fiber UV stabilized
GWT750*

SCHERMO *SCREEN*

Vetro extrachiaro temprato 15 mm

Extra clear tempered glass 15 mm

GUARNIZIONI *SEALS*

EPDM

EPDM

CORNICE *FRAME*

Acciaio sabbiato AISI316L

Sandblasted steel AISI316L

VITERIA *SCREWS*

Acciaio inox A2

Stainless steel A2








**CONFIG.
CODICE**
CODE
CONFIG.

▲ → **H=2700K
W=3000K
N=4000K**

ALIMENTAZIONE
INPUT SUPPLY

220-240VAC 50/60HZ
220-240VAC 50/60HZ

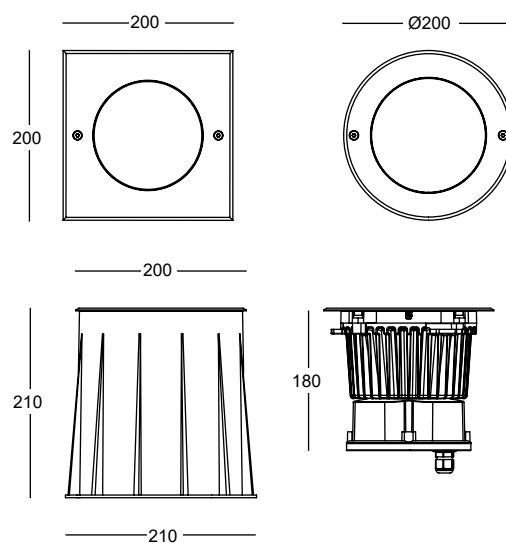

IP 67

IK 10




PLAIN

INCASSO Ø200

DRIVER INCORPORATO

RECESSED Ø200

BUILT-IN DRIVER

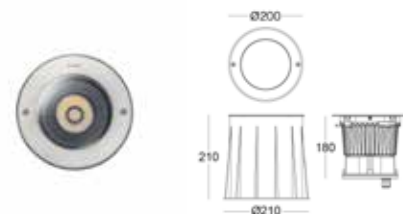

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
3200R/▲C50NB99	STRETTO/15° NARROW/15°	20W	2700 lm	1900 lm	220-240Vac 50/60Hz	II	67	10	>80
3200R/▲C50MB99	MEDIO/25° MEDIUM/25°	20W	2700 lm	1940 lm	220-240Vac 50/60Hz	II	67	10	>80
3200R/▲C50WB99	LARGO/36° WIDE/36°	20W	2700 lm	2000 lm	220-240Vac 50/60Hz	II	67	10	>80
3200R/▲C50SW99	MOLTO LARGO/60° SUPER WIDE/60°	20W	2700 lm	2000 lm	220-240Vac 50/60Hz	II	67	10	>80

VETRO EXTRACHIARO TRASPARENTE TEMPRATO 15 MM - EXTRA CLEAR TRANSPARENT TEMPERED GLASS 15 MM

ON/OFF


CARRABILE 2000 KG - DRIVEWAY 2000 KG

INCASSO ASIMMETRICO Ø200

DRIVER INCORPORATO

RECESSED ASYMMETRIC Ø200

BUILT-IN DRIVER

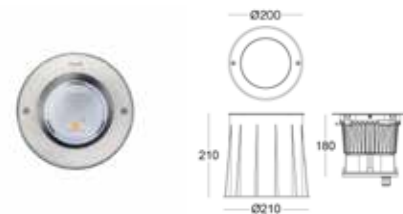

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
3200R/▲C50AB99	ASIMMETRICO ASYMMETRIC	20W	2700 lm	1850 lm	220-240Vac 50/60Hz	II	67	10	>80

VETRO EXTRACHIARO TRASPARENTE TEMPRATO 15 MM - EXTRA CLEAR TRANSPARENT TEMPERED GLASS 15 MM

ON/OFF


CARRABILE 2000 KG - DRIVEWAY 2000 KG

INCASSO VETRO OPALE Ø200

DRIVER INCORPORATO

RECESSED OPAL GLASS Ø200

BUILT-IN DRIVER

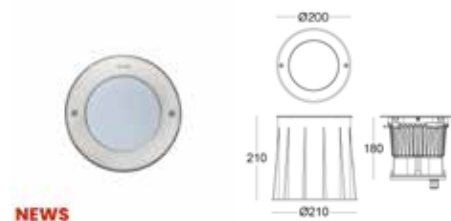

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
3200R/▲C35VO99	DIFFUSO/110° DIFFUSED/110°	12W	1500 lm	370 lm	220-240Vac 50/60Hz	II	67	10	>80

VO = VETRO EXTRACHIARO OPALE TEMPRATO 15 MM - VO = EXTRA CLEAR OPAL TEMPERED GLASS 15 MM

ON/OFF

CARRABILE 2000 KG - DRIVEWAY 2000 KG

ACCESSORI

ACCESSORIES

MOR683P/2V	CONNETTORE IP68 3POLI/2VIE 3 X 2.5 MM² CONNECTOR IP68 3POLES/2WAYS 3 X 2.5 MM²	E.TRA.581	LIMITATORE DI SOVRATENSIONE CL II - IP67 SURGE PROTECTOR CL II - IP67
MOR685P/3V	CONNETTORE A Y IP68 5POLI/3VIE 5 X 2.5 MM² CONNECTOR Y IP68 5POLES/3WAYS 5 X 2.5 MM²		

INCASSO DALI Ø200
DRIVER INCORPORATO
RECESSED DALI Ø200
BUILT-IN DRIVER



CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
3200R/▲D50NB99	 STRETTO/15° NARROW/15°	20W	2700 lm	1900 lm	220-240Vac 50/60Hz	II	67	10	>80
3200R/▲D50MB99	 MEDIO/25° MEDIUM/25°	20W	2700 lm	1940 lm	220-240Vac 50/60Hz	II	67	10	>80
3200R/▲D50WB99	 LARGO/36° WIDE/36°	20W	2700 lm	2000 lm	220-240Vac 50/60Hz	II	67	10	>80
3200R/▲D50SW99	 MOLTO LARGO/60° SUPER WIDE/60°	20W	2700 lm	2000 lm	220-240Vac 50/60Hz	II	67	10	>80

VETRO EXTRACHIARO TRASPARENTE TEMPRATO 15 MM - EXTRA CLEAR TRANSPARENT TEMPERED GLASS 15 MM

DALI-2 INTEGRATO - DALI-2 INTEGRATED

CARRABILE 2000 KG - DRIVEWAY 2000 KG

INCASSO DALI ASIMMETRICO Ø200
DRIVER INCORPORATO
RECESSED DALI ASYMMETRIC Ø200
BUILT-IN DRIVER




CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
3200R/▲D50AB99	 ASIMMETRICO ASYMMETRIC	20W	2700 lm	1850 lm	220-240Vac 50/60Hz	II	67	10	>80

VETRO EXTRACHIARO TRASPARENTE TEMPRATO 15 MM - EXTRA CLEAR TRANSPARENT TEMPERED GLASS 15 MM

DALI-2 INTEGRATO - DALI-2 INTEGRATED

CARRABILE 2000 KG - DRIVEWAY 2000 KG

INCASSO DALI VETRO OPALE Ø200
DRIVER INCORPORATO
RECESSED DALI OPAL GLAS Ø200
BUILT-IN DRIVER

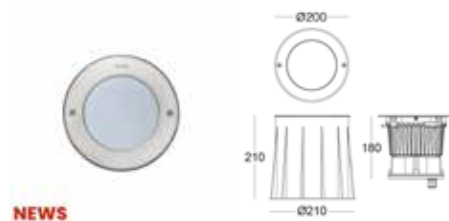

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
3200R/▲D35VO99	 DIFFUSO/110° DIFFUSED/110°	12W	1500 lm	370 lm	220-240Vac 50/60Hz	II	67	10	>80

VO = VETRO EXTRACHIARO OPALE TEMPRATO 15 MM - VO = EXTRA CLEAR OPAL TEMPERED GLASS 15 MM


DALI-2 INTEGRATO - DALI-2 INTEGRATED

CARRABILE 2000 KG - DRIVEWAY 2000 KG

ACCESSORI
ACCESSORIES

MOR685P/2V	CONNETTORE IP68 5POLI/2VIE 5 X 2.5 MM² CONNECTOR IP68 5POLES/2WAYS 5 X 2.5 MM²	E.TRA.581	LIMITATORE DI SOVRATENSIONE CL II - IP67 SURGE PROTECTOR CL II - IP67
MOR685P/3V	CONNETTORE A Y IP68 5POLI/3VIE 5 X 2.5 MM² CONNECTOR Y IP68 5POLES/3WAYS 5 X 2.5 MM²		

INCASSO TRIAC Ø200
DRIVER INCORPORATO
RECESSED TRIAC Ø200
BUILT-IN DRIVER

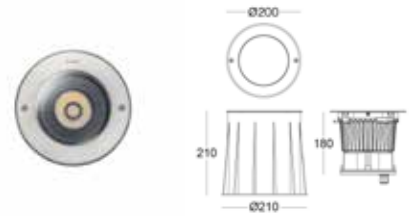


CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
3200R/▲T50NB99	 STRETTO/15° NARROW/15°	20W	2700 lm	1900 lm	220-240Vac 50/60Hz	II	67	10	>80
3200R/▲T50MB99	 MEDIO/25° MEDIUM/25°	20W	2700 lm	1940 lm	220-240Vac 50/60Hz	II	67	10	>80
3200R/▲T50WB99	 LARGO/36° WIDE/36°	20W	2700 lm	2000 lm	220-240Vac 50/60Hz	II	67	10	>80
3200R/▲T50SW99	 MOLTO LARGO/60° SUPER WIDE/60°	20W	2700 lm	2000 lm	220-240Vac 50/60Hz	II	67	10	>80

VETRO EXTRACHIARO TRASPARENTE TEMPRATO 15 MM - EXTRA CLEAR TRANSPARENT TEMPERED GLASS 15 MM

DIMMERABILE IN TAGLIO DI FASE - PHASE CUT DIMMABLE

CARRABILE 2000 KG - DRIVEWAY 2000 KG

INCASSO TRIAC ASIMMETRICO Ø200
DRIVER INCORPORATO
RECESSED TRIAC ASYMMETRIC Ø200
BUILT-IN DRIVER

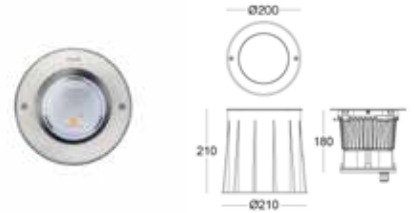


CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
3200R/▲T50AB99	 ASIMMETRICO ASYMMETRIC	20W	2700 lm	1850 lm	220-240Vac 50/60Hz	II	67	10	>80

VETRO EXTRACHIARO TRASPARENTE TEMPRATO 15 MM - EXTRA CLEAR TRANSPARENT TEMPERED GLASS 15 MM

DIMMERABILE IN TAGLIO DI FASE - PHASE CUT DIMMABLE

CARRABILE 2000 KG - DRIVEWAY 2000 KG

INCASSO TRIAC VETRO OPALE Ø200
DRIVER INCORPORATO
RECESSED TRIAC OPAL GLAS Ø200
BUILT-IN DRIVER

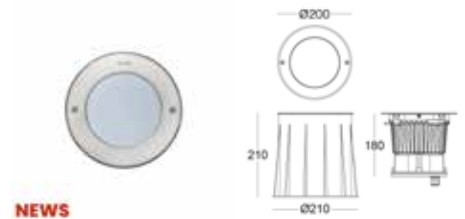

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
3200R/▲T35VO99	 DIFFUSO/110° DIFFUSED/110°	12W	1500 lm	370 lm	220-240Vac 50/60Hz	II	67	10	>80

VO = VETRO EXTRACHIARO OPALE TEMPRATO 15 MM - VO = EXTRA CLEAR OPAL TEMPERED GLASS 15 MM

DIMMERABILE IN TAGLIO DI FASE - PHASE CUT DIMMABLE

CARRABILE 2000 KG - DRIVEWAY 2000 KG

ACCESSORI
ACCESSORIES


MOR683P/2V	CONNETTORE IP68 3POLI/2VIE 3 X 2.5 MM² CONNECTOR IP68 3POLES/2WAYS 3 X 2.5 MM²	E.TRA.581	LIMITATORE DI SOVRATENSIONE CL II - IP67 SURGE PROTECTOR CL II - IP67
MOR685P/3V	CONNETTORE A Y IP68 5POLI/3VIE 5 X 2.5 MM² CONNECTOR Y IP68 5POLES/3WAYS 5 X 2.5 MM²	KIT.034	KIT CASAMBI IP68 220V TRIAC KIT CASAMBI IP68 220V TRIAC

INCASSO L. 200

DRIVER INCORPORATO

RECESSED L. 200

BUILT-IN DRIVER

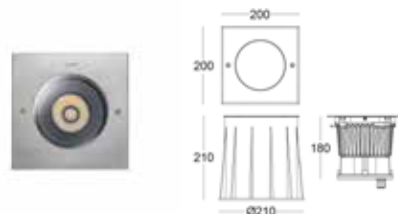

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
3210R/▲C50NB99	 STRETTO/15° NARROW/15°	20W	2700 lm	1900 lm	220-240Vac 50/60Hz	II	67	10	>80
3210R/▲C50MB99	 MEDIO/25° MEDIUM/25°	20W	2700 lm	1940 lm	220-240Vac 50/60Hz	II	67	10	>80
3210R/▲C50WB99	 LARGO/36° WIDE/36°	20W	2700 lm	2000 lm	220-240Vac 50/60Hz	II	67	10	>80
3210R/▲C50SW99	 MOLTO LARGO/60° SUPER WIDE/60°	20W	2700 lm	2000 lm	220-240Vac 50/60Hz	II	67	10	>80

VETRO EXTRACHIARO TRASPARENTE TEMPRATO 15 MM - EXTRA CLEAR TRANSPARENT TEMPERED GLASS 15 MM

ON/OFF


CARRABILE 2000 KG - DRIVEWAY 2000 KG

INCASSO ASIMMETRICO L. 200

DRIVER INCORPORATO

RECESSED ASYMMETRIC L. 200

BUILT-IN DRIVER

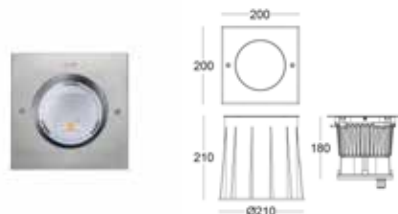

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
3210R/▲C50AB99	 ASIMMETRICO ASYMMETRIC	20W	2700 lm	1850 lm	220-240Vac 50/60Hz	II	67	10	>80

VETRO EXTRACHIARO TRASPARENTE TEMPRATO 15 MM - EXTRA CLEAR TRANSPARENT TEMPERED GLASS 15 MM

ON/OFF


CARRABILE 2000 KG - DRIVEWAY 2000 KG

INCASSO VETRO OPALE L. 200

DRIVER INCORPORATO

RECESSED OPAL GLASS L. 200

BUILT-IN DRIVER

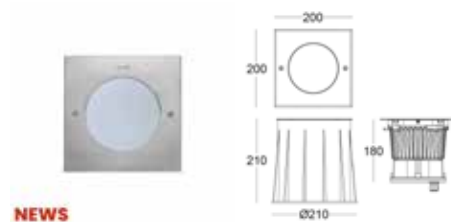

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
3210R/▲C35VO99	 DIFFUSO/110° DIFFUSED/110°	12W	1500 lm	370 lm	220-240Vac 50/60Hz	II	67	10	>80

VO = VETRO EXTRACHIARO OPALE TEMPRATO 15 MM - VO = EXTRA CLEAR OPAL TEMPERED GLASS 15 MM

ON/OFF


CARRABILE 2000 KG - DRIVEWAY 2000 KG

ACCESSORI

ACCESSORIES

MOR683P/2V	CONNETTORE IP68 3POLI/2VIE 3 X 2.5 MM² CONNECTOR IP68 3POLES/2WAYS 3 X 2.5 MM²	E.TRA.581	LIMITATORE DI SOVRATENSIONE CL II - IP67 SURGE PROTECTOR CL II - IP67
MOR685P/3V	CONNETTORE A Y IP68 5POLI/3VIE 5 X 2.5 MM² CONNECTOR Y IP68 5POLES/3WAYS 5 X 2.5 MM²		

INCASSO DALI L. 200
DRIVER INCORPORATO
RECESSED DALI L. 200
BUILT-IN DRIVER

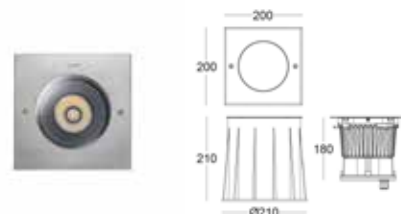


CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
3210R/▲D50NB99	STRETTO/15° NARROW/15°	20W	2700 lm	1940 lm	220-240Vac 50/60Hz	II	67	10	>80
3210R/▲D50MB99	MEDIO/25° MEDIUM/25°	20W	2700 lm	1900 lm	220-240Vac 50/60Hz	II	67	10	>80
3210R/▲D50WB99	LARGO/36° WIDE/36°	20W	2700 lm	2000 lm	220-240Vac 50/60Hz	II	67	10	>80
3210R/▲D50SW99	MOLTO LARGO/60° SUPER WIDE/60°	20W	2700 lm	2000 lm	220-240Vac 50/60Hz	II	67	10	>80

VETRO EXTRACHIARO TRASPARENTE TEMPRATO 15 MM - EXTRA CLEAR TRANSPARENT TEMPERED GLASS 15 MM

DALI-2 INTEGRATO - DALI-2 INTEGRATED

CARRABILE 2000 KG - DRIVEWAY 2000 KG

INCASSO DALI ASIMMETRICO L. 200
DRIVER INCORPORATO
RECESSED DALI ASYMMETRIC L. 200
BUILT-IN DRIVER

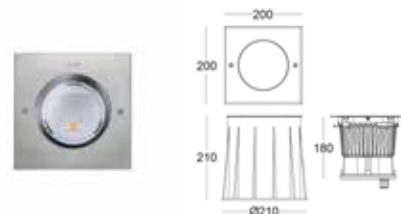


CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
3210R/▲D50AB99	ASIMMETRICO ASYMMETRIC	20W	2700 lm	1850 lm	220-240Vac 50/60Hz	II	67	10	>80

VETRO EXTRACHIARO TRASPARENTE TEMPRATO 15 MM - EXTRA CLEAR TRANSPARENT TEMPERED GLASS 15 MM

DALI-2 INTEGRATO - DALI-2 INTEGRATED

CARRABILE 2000 KG - DRIVEWAY 2000 KG

INCASSO DALI VETRO OPALE L. 200
DRIVER INCORPORATO
RECESSED DALI OPAL GLAS L. 200
BUILT-IN DRIVER

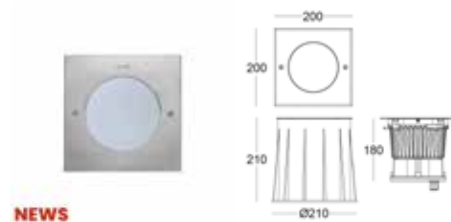

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
3210R/▲D35VO99	DIFFUSO/110° DIFFUSED/110°	12W	1500 lm	370 lm	220-240Vac 50/60Hz	II	67	10	>80

VO = VETRO EXTRACHIARO OPALE TEMPRATO 15 MM - VO = EXTRA CLEAR OPAL TEMPERED GLASS 15 MM

DALI-2 INTEGRATO - DALI-2 INTEGRATED

CARRABILE 2000 KG - DRIVEWAY 2000 KG


ACCESSORI
ACCESSORIES

MOR685P/2V	CONNETTORE IP68 5POLI/2VIE 5 X 2.5 MM² CONNECTOR IP68 5POLES/2WAYS 5 X 2.5 MM²	E.TRA.581	LIMITATORE DI SOVRATENSIONE CL II - IP67 SURGE PROTECTOR CL II - IP67
MOR685P/3V	CONNETTORE A Y IP68 5POLI/3VIE 5 X 2.5 MM² CONNECTOR Y IP68 5POLES/3WAYS 5 X 2.5 MM²		

INCASSO TRIAC L. 200

DRIVER INCORPORATO

RECESSED TRIAC L. 200
BUILT-IN DRIVER

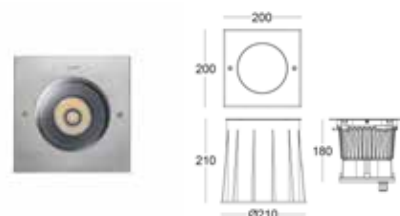

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
3210R/▲T50NB99	 STRETTO/15° NARROW/15°	20W	2700 lm	1940 lm	220-240Vac 50/60Hz	II	67	10	>80
3210R/▲T50MB99	 MEDIO/25° MEDIUM/25°	20W	2700 lm	1900 lm	220-240Vac 50/60Hz	II	67	10	>80
3210R/▲T50WB99	 LARGO/36° WIDE/36°	20W	2700 lm	2000 lm	220-240Vac 50/60Hz	II	67	10	>80
3210R/▲T50SW99	 MOLTO LARGO/60° SUPER WIDE/60°	20W	2700 lm	2000 lm	220-240Vac 50/60Hz	II	67	10	>80

VETRO EXTRACHIARO TRASPARENTE TEMPRATO 15 MM - EXTRA CLEAR TRANSPARENT TEMPERED GLASS 15 MM


DIMMERABILE IN TAGLIO DI FASE - PHASE CUT DIMMABLE

CARRABILE 2000 KG - DRIVEWAY 2000 KG

INCASSO TRIAC ASIMMETRICO L. 200

DRIVER INCORPORATO

RECESSED TRIAC ASYMMETRIC L. 200
BUILT-IN DRIVER

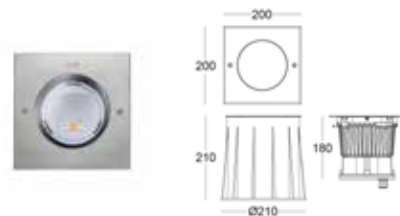

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
3210R/▲T50AB99	 ASIMMETRICO ASYMMETRIC	20W	2700 lm	1850 lm	220-240Vac 50/60Hz	II	67	10	>80

VETRO EXTRACHIARO TRASPARENTE TEMPRATO 15 MM - EXTRA CLEAR TRANSPARENT TEMPERED GLASS 15 MM


DIMMERABILE IN TAGLIO DI FASE - PHASE CUT DIMMABLE

CARRABILE 2000 KG - DRIVEWAY 2000 KG

INCASSO TRIAC VETRO OPALE L. 200

DRIVER INCORPORATO

RECESSED TRIAC OPAL GLAS L. 200
BUILT-IN DRIVER

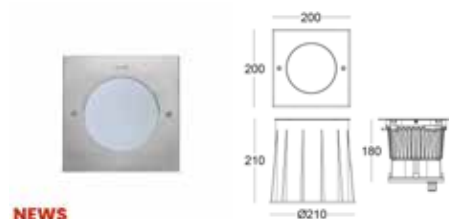

NEWS

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
3210R/▲T35VO99	 DIFFUSO/110° DIFFUSED/110°	12W	1500 lm	370 lm	220-240Vac 50/60Hz	II	67	10	>80

VO = VETRO EXTRACHIARO OPALE TEMPRATO 15 MM - VO = EXTRA CLEAR OPAL TEMPERED GLASS 15 MM

DIMMERABILE IN TAGLIO DI FASE - PHASE CUT DIMMABLE

CARRABILE 2000 KG - DRIVEWAY 2000 KG

ACCESSORI

ACCESSORIES

MOR683P/2V	CONNETTORE IP68 3POLI/2VIE 3 X 2.5 MM² CONNECTOR IP68 3POLES/2WAYS 3 X 2.5 MM²	E.TRA.581	LIMITATORE DI SOVRATENSIONE CL II - IP67 SURGE PROTECTOR CL II - IP67
MOR685P/3V	CONNETTORE A Y IP68 5POLI/3VIE 5 X 2.5 MM² CONNECTOR Y IP68 5POLES/3WAYS 5 X 2.5 MM²	KIT.034	KIT CASAMBI IP68 220V TRIAC KIT CASAMBI IP68 220V TRIAC

PLAIN ADJUSTABLE

INCASSO ORIENTABILE Ø200

DRIVER INCORPORATO

ADJUSTABLE RECESSED Ø200

BUILT-IN DRIVER



CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
3201R/▲C45NB99	 ORIENTABILE STRETTO/16° ADJUSTABLE NARROW/16°	18W	2400 lm	1800 lm	220-240Vac 50/60Hz	II	67	10	>80
3201R/▲C45MB99	 ORIENTABILE MEDIO/33° ADJUSTABLE MEDIUM/33°	18W	2400 lm	1800 lm	220-240Vac 50/60Hz	II	67	10	>80
3201R/▲C45WB99	 ORIENTABILE LARGO/54° ADJUSTABLE WIDE/54°	18W	2400 lm	1700 lm	220-240Vac 50/60Hz	II	67	10	>80
3201R/▲C45OB99	 ORIENTABILE OVALE/25°X60° ADJUSTABLE OVAL/25°X60°	18W	2400 lm	1700 lm	220-240Vac 50/60Hz	II	67	10	>80

VETRO EXTRACHIARO TRASPARENTE TEMPRATO 15 MM - EXTRA CLEAR TRANSPARENT TEMPERED GLASS 15 MM

ON/OFF


CARRABILE 2000 KG - DRIVEWAY 2000 KG

INCASSO ORIENTABILE L. 200

DRIVER INCORPORATO

ADJUSTABLE RECESSED L. 200

BUILT-IN DRIVER

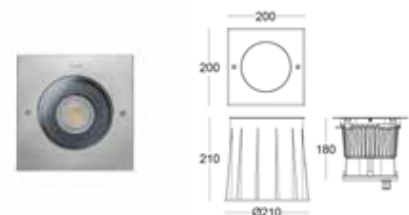

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
3211R/▲C45NB99	 ORIENTABILE STRETTO/16° ADJUSTABLE NARROW/16°	18W	2400 lm	1800 lm	220-240Vac 50/60Hz	II	67	10	>80
3211R/▲C45MB99	 ORIENTABILE MEDIO/33° ADJUSTABLE MEDIUM/33°	18W	2400 lm	1800 lm	220-240Vac 50/60Hz	II	67	10	>80
3211R/▲C45WB99	 ORIENTABILE LARGO/54° ADJUSTABLE WIDE/54°	18W	2400 lm	1700 lm	220-240Vac 50/60Hz	II	67	10	>80
3211R/▲C45OB99	 ORIENTABILE OVALE/25°X60° ADJUSTABLE OVAL/25°X60°	18W	2400 lm	1700 lm	220-240Vac 50/60Hz	II	67	10	>80

VETRO EXTRACHIARO TRASPARENTE TEMPRATO 15 MM - EXTRA CLEAR TRANSPARENT TEMPERED GLASS 15 MM

ON/OFF

CARRABILE 2000 KG - DRIVEWAY 2000 KG

ACCESSORI

ACCESSORIES

MOR683P/2V	CONNETTORE IP68 3POLI/2VIE 3 X 2.5 MM² CONNECTOR IP68 3POLES/2WAYS 3 X 2.5 MM²	E.TRA.581	LIMITATORE DI SOVRATENSIONE CL II - IP67 SURGE PROTECTOR CL II - IP67
MOR685P/3V	CONNETTORE A Y IP68 5POLI/3VIE 5 X 2.5 MM² CONNECTOR Y IP68 5POLES/3WAYS 5 X 2.5 MM²		

INCASSO ORIENTABILE DALI Ø200
DRIVER INCORPORATO
ADJUSTABLE RECESSED DALI Ø200
BUILT-IN DRIVER




CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
3201R/▲D45NB99	 ORIENTABILE STRETTO/16° ADJUSTABLE NARROW/16°	18W	2400 lm	1800 lm	220-240Vac 50/60Hz	II	67	10	>80
3201R/▲D45MB99	 ORIENTABILE MEDIO/33° ADJUSTABLE MEDIUM/33°	18W	2400 lm	1800 lm	220-240Vac 50/60Hz	II	67	10	>80
3201R/▲D45WB99	 ORIENTABILE LARGO/54° ADJUSTABLE WIDE/54°	18W	2400 lm	1700 lm	220-240Vac 50/60Hz	II	67	10	>80
3201R/▲D45OB99	 ORIENTABILE OVALE/25°X60° ADJUSTABLE OVAL/25°X60°	18W	2400 lm	1700 lm	220-240Vac 50/60Hz	II	67	10	>80

VETRO EXTRACHIARO TRASPARENTE TEMPRATO 15 MM - EXTRA CLEAR TRANSPARENT TEMPERED GLASS 15 MM

DALI-2 INTEGRATO - DALI-2 INTEGRATED

CARRABILE 2000 KG - DRIVEWAY 2000 KG

INCASSO ORIENTABILE DALI L. 200
DRIVER INCORPORATO
ADJUSTABLE RECESSED DALI L. 200
BUILT-IN DRIVER

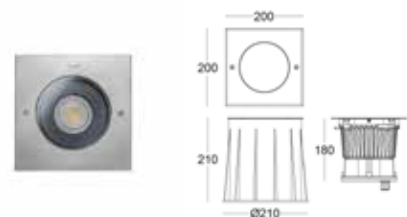

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
3211R/▲D45NB99	 ORIENTABILE STRETTO/16° ADJUSTABLE NARROW/16°	18W	2400 lm	1800 lm	220-240Vac 50/60Hz	II	67	10	>80
3211R/▲D45MB99	 ORIENTABILE MEDIO/33° ADJUSTABLE MEDIUM/33°	18W	2400 lm	1800 lm	220-240Vac 50/60Hz	II	67	10	>80
3211R/▲D45WB99	 ORIENTABILE LARGO/54° ADJUSTABLE WIDE/54°	18W	2400 lm	1700 lm	220-240Vac 50/60Hz	II	67	10	>80
3211R/▲D45OB99	 ORIENTABILE OVALE/25°X60° ADJUSTABLE OVAL/25°X60°	18W	2400 lm	1700 lm	220-240Vac 50/60Hz	II	67	10	>80

VETRO EXTRACHIARO TRASPARENTE TEMPRATO 15 MM - EXTRA CLEAR TRANSPARENT TEMPERED GLASS 15 MM


DALI-2 INTEGRATO - DALI-2 INTEGRATED

CARRABILE 2000 KG - DRIVEWAY 2000 KG

ACCESSORI
ACCESSORIES

MOR685P/2V	CONNETTORE IP68 5POLI/2VIE 5 X 2.5 MM² CONNECTOR IP68 5POLES/2WAYS 5 X 2.5 MM²	E.TRA.581	LIMITATORE DI SOVRATENSIONE CL II - IP67 SURGE PROTECTOR CL II - IP67
MOR685P/3V	CONNETTORE A Y IP68 5POLI/3VIE 5 X 2.5 MM² CONNECTOR Y IP68 5POLES/3WAYS 5 X 2.5 MM²		

INCASSO ORIENTABILE TRIAC Ø200
DRIVER INCORPORATO
ADJUSTABLE RECESSED TRIAC Ø200
BUILT-IN DRIVER

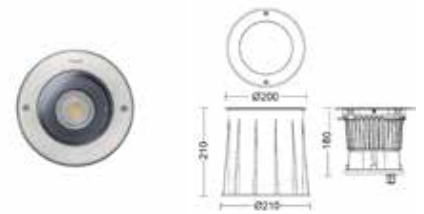


CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
3201R/▲T45NB99	 ORIENTABILE STRETTO/16° ADJUSTABLE NARROW/16°	18W	2400 lm	1800 lm	220-240Vac 50/60Hz	II	67	10	>80
3201R/▲T45MB99	 ORIENTABILE MEDIO/33° ADJUSTABLE MEDIUM/33°	18W	2400 lm	1800 lm	220-240Vac 50/60Hz	II	67	10	>80
3201R/▲T45WB99	 ORIENTABILE LARGO/54° ADJUSTABLE WIDE/54°	18W	2400 lm	1700 lm	220-240Vac 50/60Hz	II	67	10	>80
3201R/▲T45OB99	 ORIENTABILE OVALE/25°X60° ADJUSTABLE OVAL/25°X60°	18W	2400 lm	1700 lm	220-240Vac 50/60Hz	II	67	10	>80

VETRO EXTRACHIARO TRASPARENTE TEMPRATO 15 MM - EXTRA CLEAR TRANSPARENT TEMPERED GLASS 15 MM

DIMMERABILE IN TAGLIO DI FASE - PHASE CUT DIMMABLE

CARRABILE 2000 KG - DRIVEWAY 2000 KG

INCASSO ORIENTABILE TRIAC L. 200
DRIVER INCORPORATO
ADJUSTABLE RECESSED TRIAC L. 200
BUILT-IN DRIVER

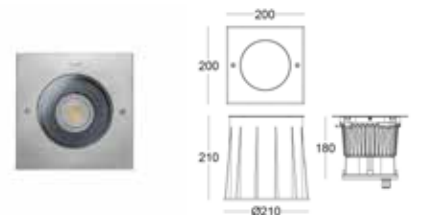

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
3211R/▲T45NB99	 ORIENTABILE STRETTO/16° ADJUSTABLE NARROW/16°	18W	2400 lm	1800 lm	220-240Vac 50/60Hz	II	67	10	>80
3211R/▲T45MB99	 ORIENTABILE MEDIO/33° ADJUSTABLE MEDIUM/33°	18W	2400 lm	1800 lm	220-240Vac 50/60Hz	II	67	10	>80
3211R/▲T45WB99	 ORIENTABILE LARGO/54° ADJUSTABLE WIDE/54°	18W	2400 lm	1700 lm	220-240Vac 50/60Hz	II	67	10	>80
3211R/▲T45OB99	 ORIENTABILE OVALE/25°X60° ADJUSTABLE OVAL/25°X60°	18W	2400 lm	1700 lm	220-240Vac 50/60Hz	II	67	10	>80

VETRO EXTRACHIARO TRASPARENTE TEMPRATO 15 MM - EXTRA CLEAR TRANSPARENT TEMPERED GLASS 15 MM

DIMMERABILE IN TAGLIO DI FASE - PHASE CUT DIMMABLE

CARRABILE 2000 KG - DRIVEWAY 2000 KG

ACCESSORI
ACCESSORIES

MOR683P/2V	CONNETTORE IP68 3POLI/2VIE 3 X 2.5 MM² CONNECTOR IP68 3POLES/2WAYS 3 X 2.5 MM²	E.TRA.581	LIMITATORE DI SOVRATENSIONE CL II - IP67 SURGE PROTECTOR CL II - IP67
MOR685P/3V	CONNETTORE A Y IP68 5POLI/3VIE 5 X 2.5 MM² CONNECTOR Y IP68 5POLES/3WAYS 5 X 2.5 MM²	KIT.034	KIT CASAMBI IP68 220V TRIAC KIT CASAMBI IP68 220V TRIAC




PLAIN RGBW

INCASSO RGBW Ø200

RECESSED RGBW Ø200

RGBW



CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
3200R/RCRCNB99	 STRETTO/15° NARROW/15°	12W with Algorithm	1650 lm	1420 lm	24 Vdc	III	67	10	
3200R/RCRCMB99	 MEDIO/24° MEDIUM/24°	12W with Algorithm	1650 lm	1420 lm	24 Vdc	III	67	10	
3200R/RCRCWB99	 LARGO/35° WIDE/35°	12W with Algorithm	1650 lm	1420 lm	24 Vdc	III	67	10	
3200R/RCRCW99	 MOLTO LARGO/60° SUPER WIDE/60°	12W with Algorithm	1650 lm	1420 lm	24 Vdc	III	67	10	

VETRO EXTRACHIARO TRASPARENTE TEMPRATO 15 MM - EXTRA CLEAR TRANSPARENT TEMPERED GLASS 15 MM


DIMMERABILE - DIMMABLE

CARRABILE 2000 KG - DRIVEWAY 2000 KG

INCASSO RGBW L. 200

RECESSED RGBW L. 200

RGBW



CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
3210R/RCRCNB99	 STRETTO/15° NARROW/15°	12W with Algorithm	1650 lm	1420 lm	24 Vdc	III	67	10	
3210R/RCRCMB99	 MEDIO/24° MEDIUM/24°	12W with Algorithm	1650 lm	1420 lm	24 Vdc	III	67	10	
3210R/RCRCWB99	 LARGO/35° WIDE/35°	12W with Algorithm	1650 lm	1420 lm	24 Vdc	III	67	10	
3210R/RCRCW99	 MOLTO LARGO/60° SUPER WIDE/60°	12W with Algorithm	1650 lm	1420 lm	24 Vdc	III	67	10	

VETRO EXTRACHIARO TRASPARENTE TEMPRATO 15 MM - EXTRA CLEAR TRANSPARENT TEMPERED GLASS 15 MM

DIMMERABILE - DIMMABLE

CARRABILE 2000 KG - DRIVEWAY 2000 KG

ACCESSORI

ACCESSORIES

MOR685P/2V	CONNETTORE IP68 5POLI/2VIE 5 X 2.5 MM² CONNECTOR IP68 5POLES/2WAYS 5 X 2.5 MM²	E.CNT.001	TASTIERA RGBW 16DMX CH.12-24VDC RGBW CONTROLLER 16DMX CH.12-24VDC
MOR685P/3V	CONNETTORE A Y IP68 5POLI/3VIE 5 X 2.5 MM² CONNECTOR Y IP68 5POLES/3WAYS 5 X 2.5 MM²	E.CNT.002	TASTIERA RGBW 1024DMX CH. 5-15VDC RGBW CONTROLLER 1024DMX CH. 5-15VDC
E.TRA.579 1 DRIVER FOR 1-4 LAMPS	ALIMENTATORE ON/OFF 100W 24VDC IP67 DRIVER ON/OFF 100W 24VDC IP67	E.TRA.594	SPLITTER DMX-RDM 2 CANALI SPLITTER DMX-RDM 2 CHANNELS
E.TRA.592 1 DRIVER FOR 5-9 LAMPS	ALIMENTATORE ON/OFF ELG 240W 24VDC IP67 DRIVER ON/OFF ELG 240W 24VDC IP67		

ACCESSORI

ACCESSORIES

CONNETTORI

CONNECTORS



MOR685P/2V

Connettore IP68 5Poli/2Vie 5 x 2.5 mm²
Connector IP68 5Poles/2Ways 5 x 2.5 mm²
L 109 x Ø 31



MOR685P/3V

Connettore a Y IP68 5Poli/3Vie 5 x 2.5 mm²
Connector Y IP68 5Poles/3Ways 5 x 2.5 mm²
L 140 x W 72 x H 33

ALIMENTATORI 24Vdc

DRIVER 24Vdc



E.TRA.579

1 Driver for 1-4 Lamps

Alimentatore ON/OFF 100W 24Vdc IP67
Driver ON/OFF 100W 24Vdc IP67
L 140 x W 63 x H 32



E.TRA.592

1 Driver for 5-9 Lamps

Alimentatore ON/OFF ELG 240W 24Vdc IP67
Driver ON/OFF ELG 240W 24Vdc IP67
L 244 x W 71 x H 38

CENTRALINE RGBW

RGBW CONTROL UNITS



E.TRA.594

Splitter DMX-RDM 2 Canali
Splitter DMX-RDM 2 Channels
L 88 x W 54 x H 26

CONTROLLER TOUCH

TOUCH CONTROLLER



E.CNT.001

Tastiera RGBW 16DMX Ch.12-24Vdc
RGBW Controller 16DMX Ch.12-24Vdc
L 75 x W 29.5 x H 120



E.CNT.002

Tastiera RGBW 1024DMX Ch.5-15Vdc
RGBW Controller 1024DMX Ch.5-15Vdc
L 146 x W 10 x H 106

