



PLATHO 260

Apparecchi da incasso per illuminazione architettonica
Architectural recessed lights

DESCRIZIONE *DESCRIZIONE*

Apparecchio da incasso a pavimento carrabile, con una resistenza al carico statico di 2000 Kg. Dotato di diverse ottiche per differenti distribuzioni della luce, utili per l'illuminazione radente di facciate e elementi architettonici. A scelta nella versione rotonda o quadrata.

Recessed driveover floor luminaire, with a static load resistance of 2000 kg. Equipped with different optics for different light distributions, useful for the grazing lighting of facades and architectural elements. Available in round or square version.

INSTALLAZIONE *INSTALLATION*

Incasso a terra

Ground recessed

CORPO *BODY*

Alluminio pressofuso

Die-cast aluminum

BOX *BOX*

Polipropilene (PP) 30% fibra stabilizzata UV
GWT750

*Polypropylene (PP) 30% fiber UV stabilized
GWT750*

SCHERMO *SCREEN*

Vetro extrachiaro trasparente temprato
12 mm

*Extra clear transparent tempered glass
12 mm*

GUARNIZIONI *SEALS*

EPDM

EPDM

CORNICE *FRAME*

Acciaio sabbiato AISI316L


Sandblasted steel AISI316L

VITERIA *SCREWS*

Acciaio inox A2

Stainless steel A2



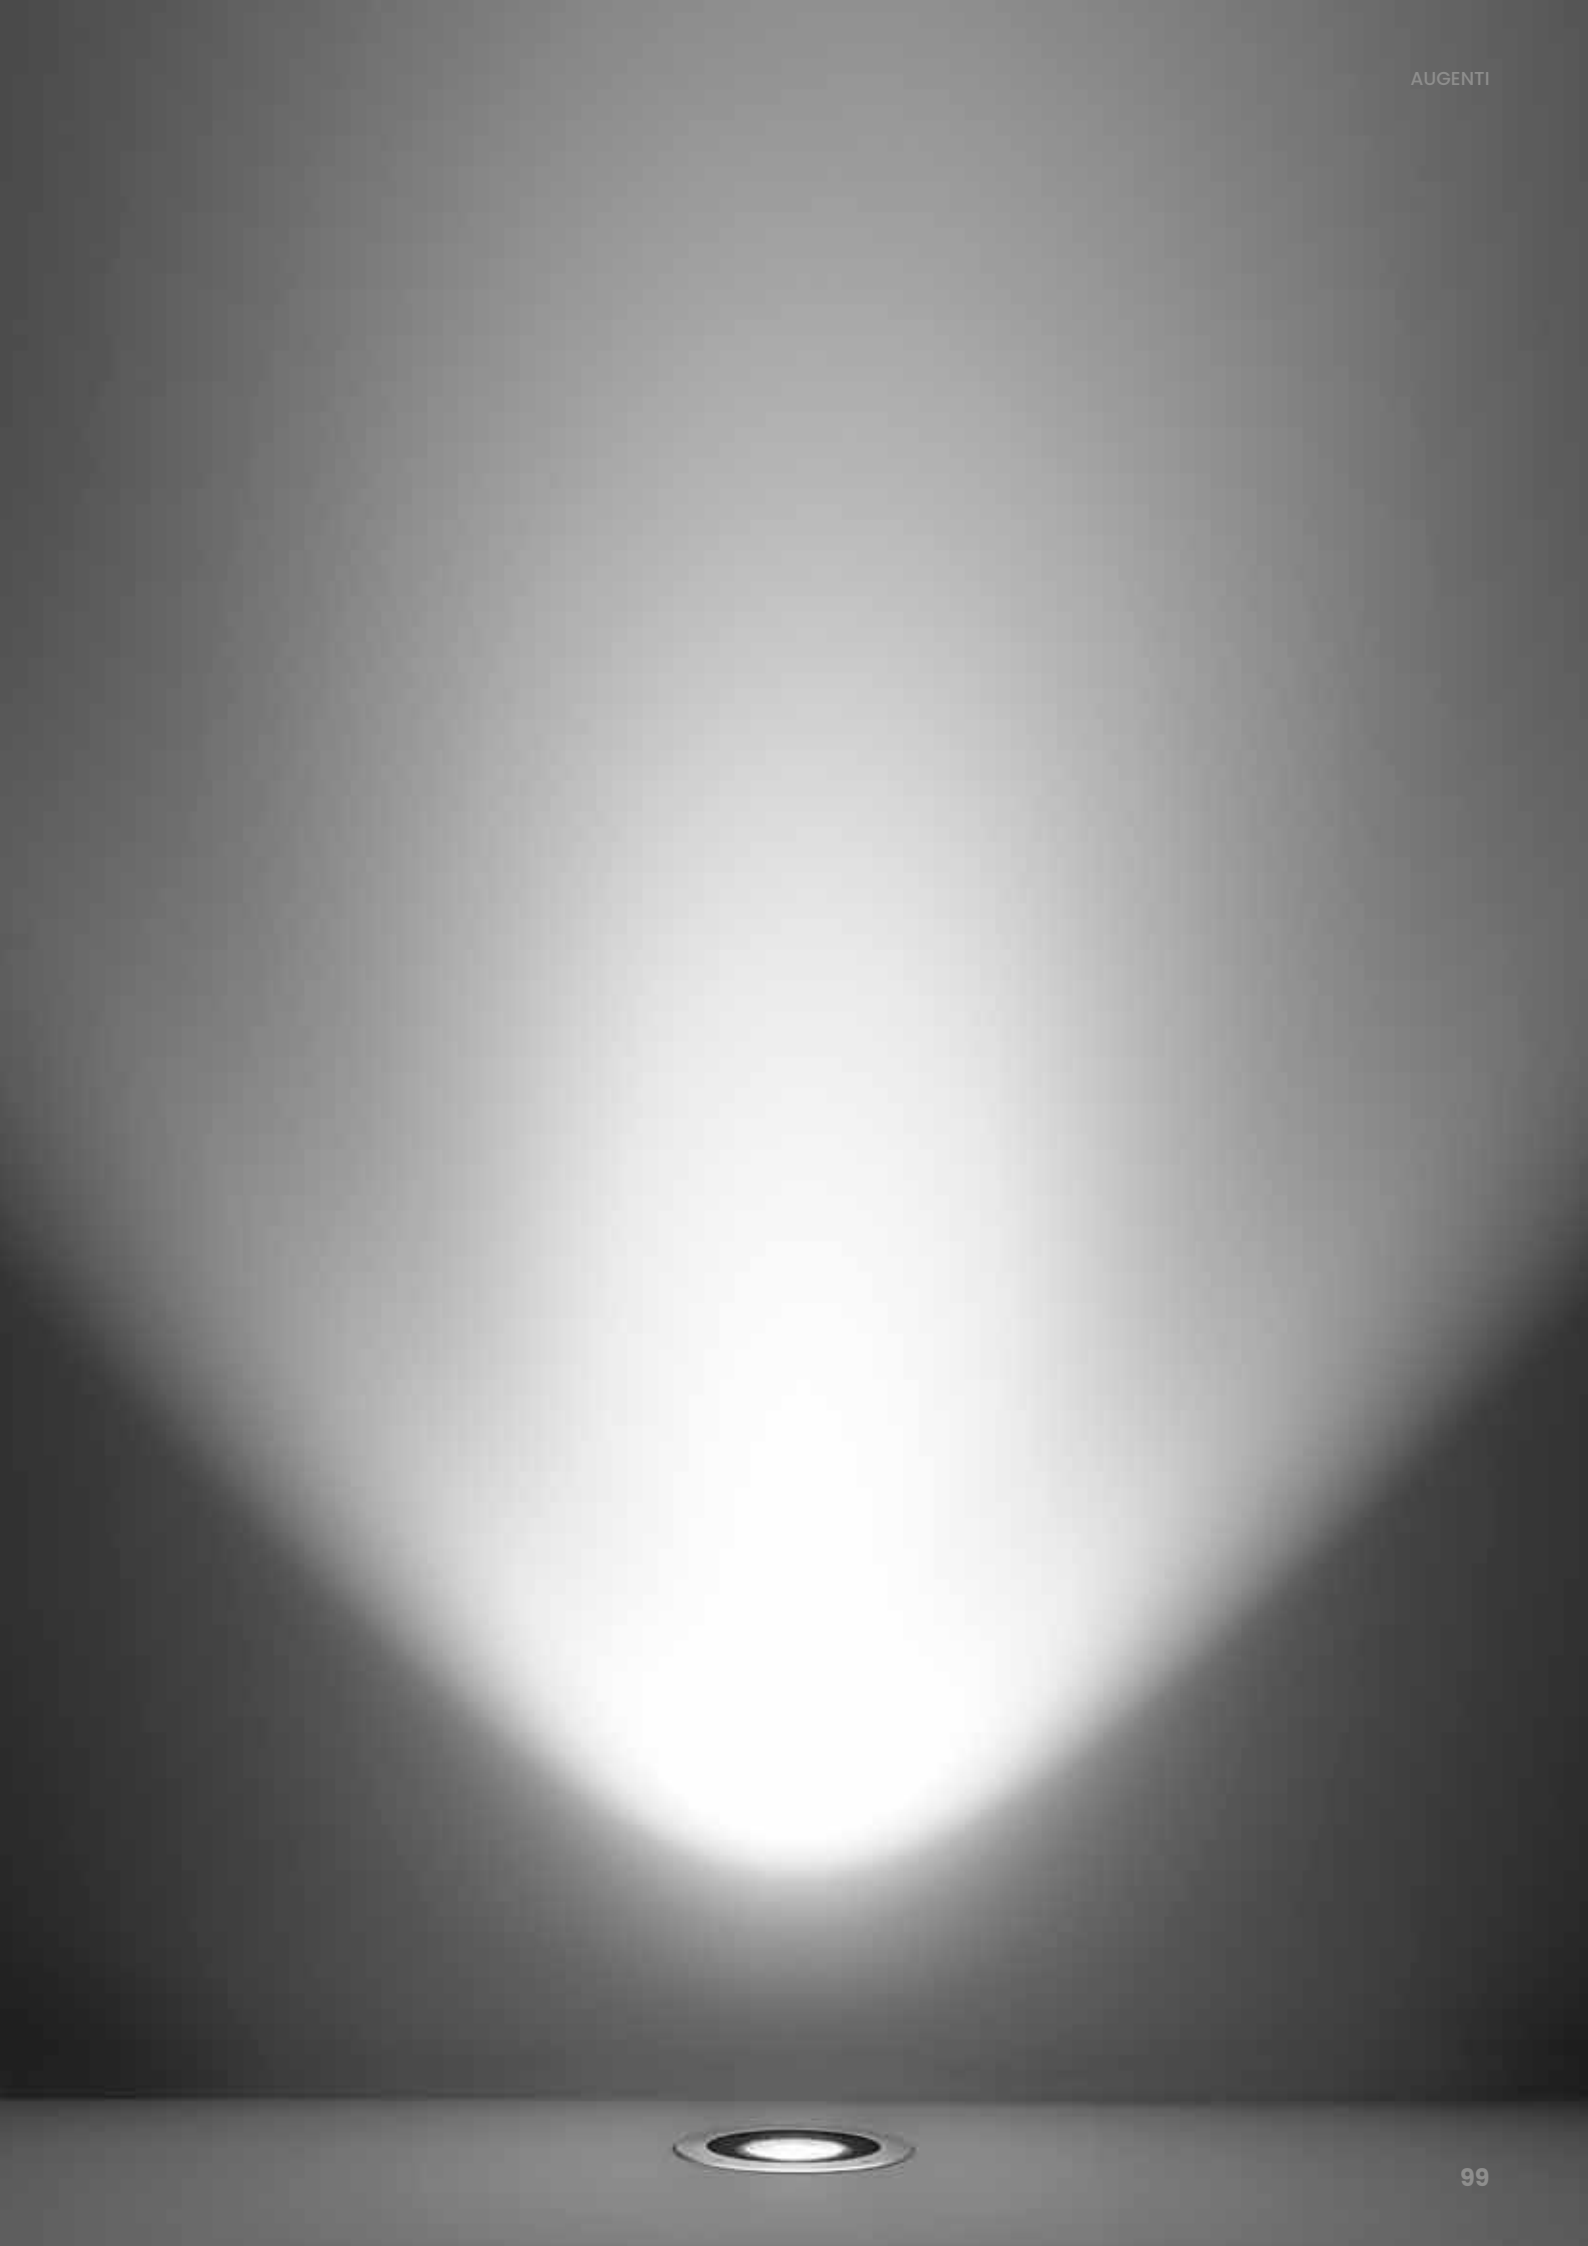





CONFIG.
CODICE
CODE
CONFIG.


▲ → **W=3000K**
N=4000K

ALIMENTAZIONE
INPUT SUPPLY

220-240VAC 50/60HZ
220-240VAC 50/60HZ

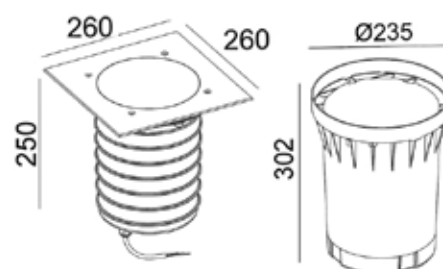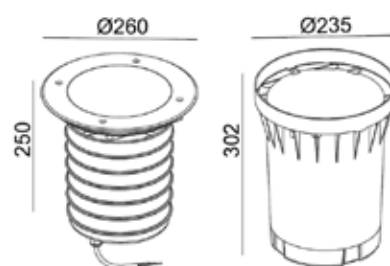

INCASSO Ø260
DRIVER INCORPORATO
RECESSED Ø260
BUILT-IN DRIVER

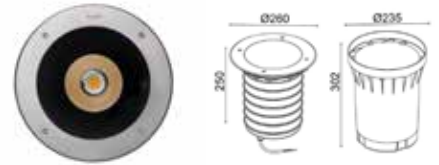


CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
4460R/▲C90NB.99	 STRETTO/14° NARROW/14°	34W	4850 lm	3817 lm	220-240Vac 50/60Hz	I	67	10	>80
4460R/▲C90MB.99	 MEDIO/32° MEDIUM/32°	34W	4850 lm	3817 lm	220-240Vac 50/60Hz	I	67	10	>80
4460R/▲C90WB.99	 LARGO/44° WIDE/44°	34W	4850 lm	3817 lm	220-240Vac 50/60Hz	I	67	10	>80

VETRO EXTRACHIARO TRASPARENTE TEMPRATO 15 MM - EXTRA CLEAR TRANSPARENT TEMPERED GLASS 15 MM

ON/OFF

CARRABILE 2000 KG - DRIVEWAY 2000 KG

INCASSO L. 260
DRIVER INCORPORATO
RECESSED L. 260
BUILT-IN DRIVER

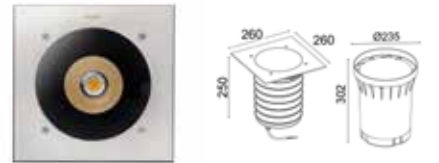

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
4461R/▲C90NB.99	 STRETTO/14° NARROW/14°	34W	4850 lm	3187 lm	220-240Vac 50/60Hz	I	67	10	>80
4461R/▲C90MB.99	 MEDIO/32° MEDIUM/32°	34W	4850 lm	3187 lm	220-240Vac 50/60Hz	I	67	10	>80
4461R/▲C90WB.99	 LARGO/44° WIDE/44°	34W	4850 lm	3187 lm	220-240Vac 50/60Hz	I	67	10	>80

VETRO EXTRACHIARO TRASPARENTE TEMPRATO 15 MM - EXTRA CLEAR TRANSPARENT TEMPERED GLASS 15 MM


ON/OFF

CARRABILE 2000 KG - DRIVEWAY 2000 KG

ACCESSORI
ACCESSORIES

MOR683P/2V	CONNETTORE IP68 3POLI/2VIE 3 X 2.5 MM² CONNECTOR IP68 3POLES/2WAYS 3 X 2.5 MM²	E.TRA.580	LIMITATORE DI SOVRATENSIONE CL I - IP67 SURGE PROTECTOR CL I - IP67
MOR685P/3V	CONNETTORE A Y IP68 5POLI/3VIE 5 X 2.5 MM² CONNECTOR Y IP68 5POLES/3WAYS 5 X 2.5 MM²		

INCASSO DALI Ø260
DRIVER INCORPORATO
RECESSED DALI Ø260
BUILT-IN DRIVER

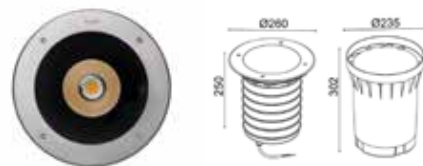

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
4460R/▲D90NB.99	 STRETTO/14° NARROW/14°	34W	4850 lm	3817 lm	220-240Vac 50/60Hz	I	67	10	>80
4460R/▲D90MB.99	 MEDIO/32° MEDIUM/32°	34W	4850 lm	3817 lm	220-240Vac 50/60Hz	I	67	10	>80
4460R/▲D90WB.99	 LARGO/44° WIDE/44°	34W	4850 lm	3817 lm	220-240Vac 50/60Hz	I	67	10	>80

VETRO EXTRACHIARO TRASPARENTE TEMPRATO 15 MM - EXTRA CLEAR TRANSPARENT TEMPERED GLASS 15 MM

DALI-2 INTEGRATO - DALI-2 INTEGRATED

CARRABILE 2000 KG - DRIVEWAY 2000 KG

INCASSO DALI L. 260
DRIVER INCORPORATO
RECESSED DALI L. 260
BUILT-IN DRIVER



CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
4461R/▲D90NB.99	 STRETTO/14° NARROW/14°	34W	4850 lm	3187 lm	220-240Vac 50/60Hz	I	67	10	>80
4461R/▲D90MB.99	 MEDIO/32° MEDIUM/32°	34W	4850 lm	3187 lm	220-240Vac 50/60Hz	I	67	10	>80
4461R/▲D90WB.99	 LARGO/44° WIDE/44°	34W	4850 lm	3187 lm	220-240Vac 50/60Hz	I	67	10	>80

VETRO EXTRACHIARO TRASPARENTE TEMPRATO 15 MM - EXTRA CLEAR TRANSPARENT TEMPERED GLASS 15 MM

DALI-2 INTEGRATO - DALI-2 INTEGRATED

CARRABILE 2000 KG - DRIVEWAY 2000 KG

ACCESSORI
ACCESSORIES

MOR685P/2V	CONNETTORE IP68 5POLI/2VIE 5 X 2.5 MM² CONNECTOR IP68 5POLES/2WAYS 5 X 2.5 MM²	E.TRA.580	LIMITATORE DI SOVRATENSIONE CL I - IP67 SURGE PROTECTOR CL I - IP67
MOR685P/3V	CONNETTORE A Y IP68 5POLI/3VIE 5 X 2.5 MM² CONNECTOR Y IP68 5POLES/3WAYS 5 X 2.5 MM²		

INCASSO Ø260 LED ARRAY
DRIVER INCORPORATO
RECESSED Ø260 LED ARRAY
BUILT-IN DRIVER



CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
4460R/▲R60NB.99	STRETTO/20° NARROW/20°	28W	3710 lm	2671 lm	220-240Vac 50/60Hz	I	67	10	>80
4460R/▲R60MB.99	MEDIO/32° MEDIUM/32°	28W	3710 lm	2671 lm	220-240Vac 50/60Hz	I	67	10	>80
4460R/▲R60WB.99	LARGO/50° WIDE/50°	28W	3710 lm	2671 lm	220-240Vac 50/60Hz	I	67	10	>80

VETRO EXTRACHIARO TRASPARENTE TEMPRATO 15 MM - EXTRA CLEAR TRANSPARENT TEMPERED GLASS 15 MM

ON/OFF

CARRABILE 2000 KG - DRIVEWAY 2000 KG

INCASSO L. 260 LED ARRAY
DRIVER INCORPORATO
RECESSED L. 260 LED ARRAY
BUILT-IN DRIVER



CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
4461R/▲R60NB.99	STRETTO/20° NARROW/20°	28W	3710 lm	2671 lm	220-240Vac 50/60Hz	I	67	10	>80
4461R/▲R60MB.99	MEDIO/32° MEDIUM/32°	28W	3710 lm	2671 lm	220-240Vac 50/60Hz	I	67	10	>80
4461R/▲R60WB.99	LARGO/50° WIDE/50°	28W	3710 lm	2671 lm	220-240Vac 50/60Hz	I	67	10	>80

VETRO EXTRACHIARO TRASPARENTE TEMPRATO 15 MM - EXTRA CLEAR TRANSPARENT TEMPERED GLASS 15 MM

ON/OFF

CARRABILE 2000 KG - DRIVEWAY 2000 KG

ACCESSORI
ACCESSORIES

MOR683P/2V	CONNETTORE IP68 3POLI/2VIE 3 X 2.5 MM² CONNECTOR IP68 3POLES/2WAYS 3 X 2.5 MM²	E.TRA.580	LIMITATORE DI SOVRATENSIONE CL I - IP67 SURGE PROTECTOR CL I - IP67
MOR685P/3V	CONNETTORE A Y IP68 5POLI/3VIE 5 X 2.5 MM² CONNECTOR Y IP68 5POLES/3WAYS 5 X 2.5 MM²		

INCASSO Ø260 LED ARRAY ASIMMETRICO
DRIVER INCORPORATO
RECESSED Ø260 LED ARRAY ASYMMETRIC
BUILT-IN DRIVER



CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
4460R/WR60AB.99	 ASIMMETRICO ASYMMETRIC	28W	3540 lm	1697 lm	220-240Vac 50/60Hz	I	67	10	>80
4460R/NR60AB.99	 ASIMMETRICO ASYMMETRIC	28W	3670 lm	1795 lm	220-240Vac 50/60Hz	I	67	10	>80

VETRO EXTRACHIARO TRASPARENTE TEMPRATO 15 MM - EXTRA CLEAR TRANSPARENT TEMPERED GLASS 15 MM

ON/OFF

CARRABILE 2000 KG - DRIVEWAY 2000 KG

INCASSO L. 260 LED ARRAY ASIMMETRICO
DRIVER INCORPORATO
RECESSED L. 260 LED ARRAY ASYMMETRIC
BUILT-IN DRIVER



CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
4461R/WR60AB.99	 ASIMMETRICO ASYMMETRIC	28W	3540 lm	1697 lm	220-240Vac 50/60Hz	I	67	10	>80
4461R/NR60AB.99	 ASIMMETRICO ASYMMETRIC	28W	3670 lm	1795 lm	220-240Vac 50/60Hz	I	67	10	>80

VETRO EXTRACHIARO TRASPARENTE TEMPRATO 15 MM - EXTRA CLEAR TRANSPARENT TEMPERED GLASS 15 MM

ON/OFF

CARRABILE 2000 KG - DRIVEWAY 2000 KG

ACCESSORI

ACCESSORIES

MOR683P/2V	CONNETTORE IP68 3POLI/2VIE 3 X 2.5 MM² CONNECTOR IP68 3POLES/2WAYS 3 X 2.5 MM²	E.TRA.580	LIMITATORE DI SOVRATENSIONE CL I - IP67 SURGE PROTECTOR CL I - IP67
MOR685P/3V	CONNETTORE A Y IP68 5POLI/3VIE 5 X 2.5 MM² CONNECTOR Y IP68 5POLES/3WAYS 5 X 2.5 MM²		

