



MODO

Apparecchio compatto modulare
Compact modular device

DESCRIZIONE *DESCRIZIONE*

Un semplice parallelepipedo, dalla linea minimale e dalle dimensioni compatte. In grado di essere proiettore, in verticale o in orizzontale, orientabile in funzione delle esigenze di luce. Modo offre la possibilità di combinarlo in un sistema modulare, componibile in entrambe le direzioni planari, a formare un prodotto diverso e dalle infinite capacità. Un sistema, quindi, più che un singolo volume, in grado di evolvere in più varianti geometriche e ottiche e di supportare, così, le molteplici e diversificate esigenze del lighting designer.

A simple parallelepiped, with a minimal line and compact dimensions. Able to be a projector, vertically or horizontally, adjustable according to the light requirements. Modo offers the possibility of combining it in a modular system, which can be combined in both planar directions, to form a different product with infinite capabilities. A system, therefore, more than a single volume, capable of evolving into multiple geometric and optical variants and thus supporting the multiple and diversified needs of the lighting designer.

INSTALLAZIONE *INSTALLATION*

Installazione a terra, parete o soffitto

Ground, wall or ceiling installation

CORPO *BODY*

Alluminio pressofuso

Die-cast aluminium

SCHERMO *SCREEN*

Vetro extrachiario trasparente temprato

Extra clear transparent tempered glass

GUARNIZIONI *SEALS*

EPDM a celle chiuse

Closed-cell EPDM

VITERIA *SCREWS*

Acciaio inox A2

Stainless steel A2

VERNICIATURA *FINISHING*

Polvere poliestere stabilizzata ai raggi UV con trattamento anticorrosione

Anti-corrosive UV stabilized polyester powder








**CONFIG.
CODICE**
*CODE
CONFIG.*

▲ → **H=2700K
W=3000K
N=4000K**


ALIMENTAZIONE
INPUT SUPPLY

220-240VAC 50/60HZ
220-240VAC 50/60HZ

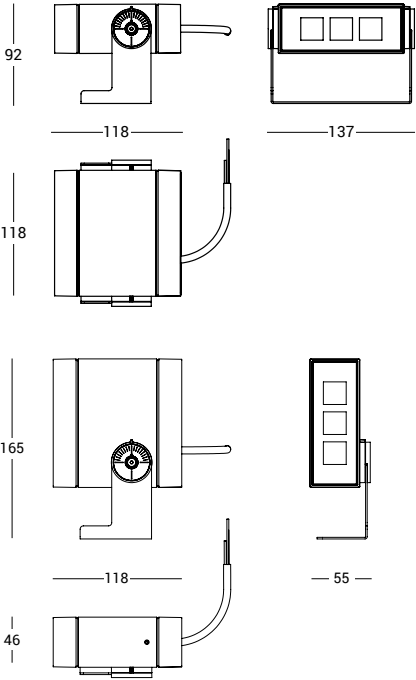

MODULO EMISSIONE VERTICALE

MODULE VERTICAL EMISSION




CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
610W1/▲P70NB	STRETTO/12° NARROW/12°	8W	790 lm	662 lm	220-240Vac 50/60Hz	I	65	07	>80
610W1/▲P70MB	MEDIO/28° MEDIUM/28°	8W	790 lm	656 lm	220-240Vac 50/60Hz	I	65	07	>80
610W1/▲P70WB	LARGO/50° WIDE/50°	8W	790 lm	643 lm	220-240Vac 50/60Hz	I	65	07	>80
610W1/▲P70BB	SINGOLO LAMA DI LUCE/4° SINGLE BLADE OF LIGHT/4°	3.5W	260 lm	237 lm	220-240Vac 50/60Hz	I	65	07	>80

VETRO EXTRACHIARO TRASPARENTE TEMPRATO - EXTRA CLEAR TRANSPARENT TEMPERED GLASS

ON/OFF

MODULO EMISSIONE ORIZZONTALE

MODULE HORIZONTAL EMISSION

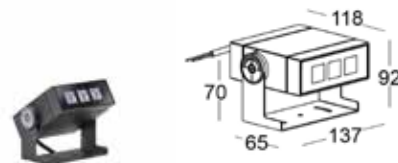

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
611W1/▲P70NB	STRETTO/12° NARROW/12°	8W	790 lm	662 lm	220-240Vac 50/60Hz	I	65	07	>80
611W1/▲P70MB	MEDIO/28° MEDIUM/28°	8W	790 lm	656 lm	220-240Vac 50/60Hz	I	65	07	>80
611W1/▲P70WB	LARGO/50° WIDE/50°	8W	790 lm	643 lm	220-240Vac 50/60Hz	I	65	07	>80
611W1/▲P70BB	SINGOLO LAMA DI LUCE/4° SINGLE BLADE OF LIGHT/4°	3.5W	260 lm	237 lm	220-240Vac 50/60Hz	I	65	07	>80

VETRO EXTRACHIARO TRASPARENTE TEMPRATO - EXTRA CLEAR TRANSPARENT TEMPERED GLASS

ON/OFF


ACCESSORI

ACCESSORIES

MOR683P/2V	CONNETTORE IP68 3POLI/2VIE 3 X 2.5 MM² CONNECTOR IP68 3POLES/2WAYS 3 X 2.5 MM²	E.TRA.580	LIMITATORE DI SOVRATENSIONE CL I - IP67 SURGE PROTECTOR CL I - IP67
------------	---	-----------	--

MODULO DALI EMISSIONE VERTICALE

MODULE DALI VERTICAL EMISSION




CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
610W1/▲D70NB	STRETTO/12° NARROW/12°	8W	790 lm	662 lm	220-240Vac 50/60Hz	I	65	07	>80
610W1/▲D70MB	MEDIO/28° MEDIUM/28°	8W	790 lm	656 lm	220-240Vac 50/60Hz	I	65	07	>80
610W1/▲D70WB	LARGO/50° WIDE/50°	8W	790 lm	643 lm	220-240Vac 50/60Hz	I	65	07	>80
610W1/▲D70BB	SINGOLO LAMA DI LUCE/4° SINGLE BLADE OF LIGHT/4°	3.5W	260 lm	237 lm	220-240Vac 50/60Hz	I	65	07	>80

VETRO EXTRACHIARO TRASPARENTE TEMPRATO - EXTRA CLEAR TRANSPARENT TEMPERED GLASS

DALI-2 INTEGRATO - DALI-2 INTEGRATED

MODULO DALI EMISSIONE ORIZZONTALE

MODULE DALI HORIZONTAL EMISSION

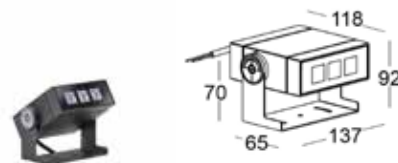

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
611W1/▲D70NB	STRETTO/12° NARROW/12°	8W	790 lm	662 lm	220-240Vac 50/60Hz	I	65	07	>80
611W1/▲D70MB	MEDIO/28° MEDIUM/28°	8W	790 lm	656 lm	220-240Vac 50/60Hz	I	65	07	>80
611W1/▲D70WB	LARGO/50° WIDE/50°	8W	790 lm	643 lm	220-240Vac 50/60Hz	I	65	07	>80
611W1/▲D70BB	SINGOLO LAMA DI LUCE/4° SINGLE BLADE OF LIGHT/4°	3.5W	260 lm	237 lm	220-240Vac 50/60Hz	I	65	07	>80

VETRO EXTRACHIARO TRASPARENTE TEMPRATO - EXTRA CLEAR TRANSPARENT TEMPERED GLASS

DALI-2 INTEGRATO - DALI-2 INTEGRATED

ACCESSORI

ACCESSORIES

MOR685P/2V	CONNETTORE IP68 5POLI/2VIE 5 X 2.5 MM² CONNECTOR IP68 5POLES/2WAYS 5 X 2.5 MM²	E.TRA.580	LIMITATORE DI SOVRATENSIONE CL I - IP67 SURGE PROTECTOR CL I - IP67
MOR685P/3V	CONNETTORE A Y IP68 5POLI/3VIE 5 X 2.5 MM² CONNECTOR Y IP68 5POLES/3WAYS 5 X 2.5 MM²		

