



OMEGA

Incasso a parete in acciaio o alluminio
Wall recessed in steel or aluminum

DESCRIZIONE DESCRIZIONE

Omega è un prodotto realizzato con materiali di elevata qualità che ne garantiscono un'ottima resa in ambienti esterni. La sua capacità di adattarsi a diverse esigenze progettuali è potenziata dalla possibilità di installazione sia a parete che a soffitto. Omega è inoltre disponibile con quattro diverse cornici, ognuna pensata per offrire uno stile unico e una personalizzazione ancora più accurata. Che si tratti di un ambiente moderno, classico, industriale o minimal, ogni cornice permette di integrare il prodotto in modo armonioso e coerente con l'identità dello spazio.

Omega is a product made with high quality materials that guarantee an excellent performance in outdoor environments. Its ability to adapt to different design needs is enhanced by the possibility of wall and ceiling installation. Omega is also available with four different frames, each designed to offer a unique style and even more accurate customization. Whether it is a modern, classic, industrial or minimal environment, each frame allows to integrate the product in a harmonious way and consistent with the identity of the space.

INSTALLAZIONE INSTALLATION

Incasso a parete

Wall recessed

CORPO BODY

Alluminio pressofuso

Die-cast aluminium

BOX BOX

Polipropilene (PP) 30% fibra stabilizzata UV

Polypropylene (PP) 30% UV stabilized fiber

SCHERMO SCREEN

Vetro stampato opale 5 mm

Opal printed glass 5 mm

GUARNIZIONI SEALS

EPDM

EPDM

VITERIA SCREWS

Acciaio inox A2

Stainless steel A2

VERNICIATURA FINISHING

Polvere poliestere stabilizzata ai raggi UV con trattamento anticorrosione

Anti-corrosive UV stabilized polyester powder







**CONFIG.
CODICE**
CODE
CONFIG.

▲ → **H=2700K**
W=3000K
N=4000K

**VERSIONE IN
TENSIONE**
CONSTANT
VOLTAGE


3,5W CON DRIVER REMOTO 24Vdc
3,5W REMOTE DRIVER 24Vdc

**VERSIONE
220-240V**
220-240V
VERSION

ALIMENTAZIONE DIRETTA
DIRECT AC



— 65 —



— Ø125 —




— 70 —



— Ø125 —



— 84 —




— Ø125 —

IP 65

IK 05




INCASSO CON GHIERA IN ACCIAIO**24VDC***RECESSED WITH STEEL RING NUT***24VDC****REVIEW**

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
9110R/▲RRCVO	 DIFFUSO >100° DIFFUSED >100°	3,5W	500 lm	150 lm	24Vdc	III	65	05	>80

VETRO STAMPATO OPALE 5 MM - OPAL PRINTED GLASS 5 MM

DIMMERABILE - DIMMABLE

INCASSO CON GHIERA IN ACCIAIO VERNICIATO**24VDC***RECESSED WITH PAINTED STEEL RING NUT***24VDC****REVIEW**

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
9111R/▲RRCVO	 DIFFUSO >100° DIFFUSED >100°	3,5W	500 lm	150 lm	24Vdc	III	65	05	>80

VETRO STAMPATO OPALE 5 MM - OPAL PRINTED GLASS 5 MM

DIMMERABILE - DIMMABLE

ACCESSORI*ACCESSORIES*

E.TRA.647 1 DRIVER FOR 1-3 LAMPS	ALIMENTATORE PER BOX 12W 24VDC IP65 - ON/OFF DRIVER FOR BOX 12W 24VDC IP65 - ON/OFF	E.TRA.579 1 DRIVER FOR 7-20 LAMPS	ALIMENTATORE ON/OFF 100W 24VDC IP67 DRIVER ON/OFF 100W 24VDC IP67
E.TRA.631 1 DRIVER FOR 1-3 LAMPS	ALIMENTATORE ON/OFF 15W 24VDC IP20 DRIVER ON/OFF 15W 24VDC IP20	E.TRA.633 1 DRIVER FOR 1-20 LAMPS	ALIMENTATORE DALI 100W 24VDC IP67 DRIVER DALI 100W 24VDC IP67
E.TRA.577 1 DRIVER FOR 1-6 LAMPS	ALIMENTATORE ON/OFF 25W 24VDC IP67 DRIVER ON/OFF 25W 24VDC IP67		

INCASSO CON GRIGLIA LINEARE IN ALLUMINIO
24VDC

RECESSED WITH LINEAR ALUMINUM GRID
24VDC




CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
9120R/▲RRCVO	 DIFFUSO >100° DIFFUSED >100°	3,5W	500 lm	150 lm	24Vdc	III	65	05	>80

VETRO STAMPATO OPALE 5 MM - OPAL PRINTED GLASS 5 MM
DIMMERABILE - DIMMABLE

INCASSO CON GHIERA A PALPEBRA IN ALLUMINIO
24VDC

RECESSED WITH EYELID ALUMINUM RING NUT
24VDC

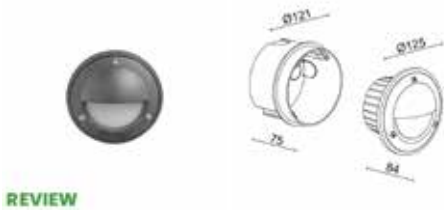

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
9130R/▲RRCVO	 DIFFUSO >100° DIFFUSED >100°	3,5W	500 lm	150 lm	24Vdc	III	65	05	>80

VETRO STAMPATO OPALE 5 MM - OPAL PRINTED GLASS 5 MM
DIMMERABILE - DIMMABLE

ACCESSORI
ACCESSORIES

E.TRA.647 1 DRIVER FOR 1-3 LAMPS	ALIMENTATORE PER BOX 12W 24VDC IP65 - ON/OFF DRIVER FOR BOX 12W 24VDC IP65 - ON/OFF	E.TRA.579 1 DRIVER FOR 7-20 LAMPS	ALIMENTATORE ON/OFF 100W 24VDC IP67 DRIVER ON/OFF 100W 24VDC IP67
E.TRA.631 1 DRIVER FOR 1-3 LAMPS	ALIMENTATORE ON/OFF 15W 24VDC IP20 DRIVER ON/OFF 15W 24VDC IP20	E.TRA.633 1 DRIVER FOR 1-20 LAMPS	ALIMENTATORE DALI 100W 24VDC IP67 DRIVER DALI 100W 24VDC IP67
E.TRA.577 1 DRIVER FOR 1-6 LAMPS	ALIMENTATORE ON/OFF 25W 24VDC IP67 DRIVER ON/OFF 25W 24VDC IP67		

INCASSO CON GHIERA IN ACCIAIO**LED DIRECT AC***RECESSED WITH STEEL RING NUT**LED DIRECT AC***REVIEW**

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
9110R/WTACVO	 DIFFUSO >100° DIFFUSED >100°	5W	500 lm	150 lm	220-240Vac 50/60Hz	I	65	05	>80

VETRO STAMPATO OPALE 5 MM - OPAL PRINTED GLASS 5 MM

DIMMERABILE IN TAGLIO DI FASE - PHASE CUT DIMMABLE

INCASSO CON GHIERA IN ACCIAIO VERNICIATO**LED DIRECT AC***RECESSED WITH PAINTED STEEL RING NUT**LED DIRECT AC***REVIEW**

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
9111R/WTACVO	 DIFFUSO >100° DIFFUSED >100°	5W	500 lm	150 lm	220-240Vac 50/60Hz	I	65	05	>80


VETRO STAMPATO OPALE 5 MM - OPAL PRINTED GLASS 5 MM

DIMMERABILE IN TAGLIO DI FASE - PHASE CUT DIMMABLE

ACCESSORI*ACCESSORIES*

E.TRA.580	LIMITATORE DI SOVRATENSIONE CL I - IP67 SURGE PROTECTOR CL I - IP67
------------------	--

INCASSO CON GRIGLIA LINEARE IN ALLUMINIO
LED DIRECT AC
RECESSED WITH LINEAR ALUMINUM GRID
LED DIRECT AC

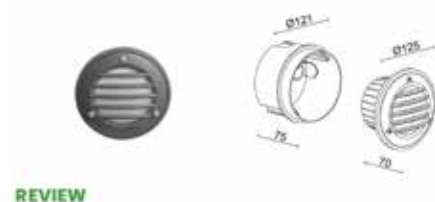


CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
9120R/WTACVO	 DIFFUSO >100° DIFFUSED >100°	5W	500 lm	150 lm	220-240Vac 50/60Hz	I	65	05	>80

VETRO STAMPATO OPALE 5 MM - OPAL PRINTED GLASS 5 MM

DIMMERABILE IN TAGLIO DI FASE - PHASE CUT DIMMABLE

INCASSO CON GHIERA A PALPEBRA IN ALLUMINIO
LED DIRECT AC
RECESSED WITH EYELID ALUMINUM RING NUT
LED DIRECT AC

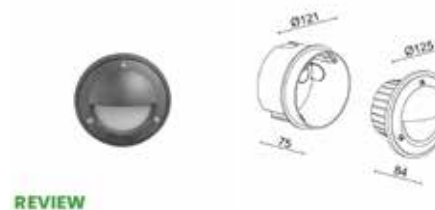

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
9130R/WTACVO	 DIFFUSO >100° DIFFUSED >100°	5W	500 lm	150 lm	220-240Vac 50/60Hz	I	65	05	>80

VETRO STAMPATO OPALE 5 MM - OPAL PRINTED GLASS 5 MM

DIMMERABILE IN TAGLIO DI FASE - PHASE CUT DIMMABLE

ACCESSORI
ACCESSORIES

E.TRA.580	LIMITATORE DI SOVRATENSIONE CL I - IP67 SURGE PROTECTOR CL I - IP67
------------------	--

ACCESSORI

ACCESSORIES

ALIMENTATORI 24Vdc

DRIVER 24Vdc



E.TRA.577

1 Driver for 1-6 Lamps

Alimentatore ON/OFF 25W 24Vdc IP67

Driver ON/OFF 25W 24Vdc IP67

L 148 x W 40 x H 32



E.TRA.579

1 Driver for 7-20 Lamps

Alimentatore ON/OFF 100W 24Vdc IP67

Driver ON/OFF 100W 24Vdc IP67

L 140 x W 63 x H 32



E.TRA.631

1 Driver for 1-3 Lamps

Alimentatore ON/OFF 15W 24Vdc IP20

Driver ON/OFF 15W 24Vdc IP20

L 106 x W 33 x H 22



E.TRA.633

1 Driver for 1-20 Lamps

Alimentatore DALI 100W 24Vdc IP67

Driver DALI 100W 24Vdc IP67

L 175 x W 63 x H 36



E.TRA.647

1 Driver for 1-3 Lamps

Alimentatore per Box 12W 24Vdc IP65 - ON/OFF

Driver for Box 12W 24Vdc IP65 - ON/OFF

L 57 x W 40 x H 26

PROTEZIONE ALLE SOVRATENSIONI

SURGE PROTECTOR



E.TRA.580

Limitatore di sovratensione CL I - IP67

Surge protector CL I - IP67

L 37 x W 30 x H 30