



MOON

Corpo illuminante per arredo urbano
Lighting body for urban lighting

DESCRIZIONE *DESCRIZIONE*

Apparecchio di illuminazione stradale con elevate prestazioni fotometriche e una vasta gamma di potenze. La sua affidabilità lo rende la scelta ideale per l'illuminazione di autostrade, aree urbane, strade residenziali, incroci, parcheggi, piazze e grandi spazi. Disponibile sia nella versione proiettore che testa palo.

Street lighting fixture with high photometric performance and a wide range of powers. Its reliability makes it the ideal choice for lighting motorways, urban areas, residential streets, intersections, parking lots, squares and large spaces. Available in both projector and pole head versions.

INSTALLAZIONE *INSTALLATION*

Installazione a terra

Ground installation

CORPO *BODY*

Alluminio estruso

Extruded aluminium

SCHERMO *SCREEN*

Vetro extrachiaro trasparente temprato

Extra clear transparent tempered glass

GUARNIZIONI *SEALS*

EPDM

EPDM

VITERIA *SCREWS*

Acciaio inox A2

Stainless steel A2

VERNICIATURA *FINISHING*

Polvere poliestere stabilizzata ai raggi UV con trattamento anticorrosione

Anti-corrosive UV stabilized polyester powder








**CONFIG.
CODICE**
CODE
CONFIG.

▲ → **W=3000K
N=4000K**


ALIMENTAZIONE
INPUT SUPPLY

220-240VAC 50/60HZ
220-240VAC 50/60HZ

74 |




— 295 —




— 440 —

74 |



— 295 —



— 540 —

IP 66

IK 08



MOON S

CORPO ILLUMINANTE CON STAFFA L. 440 EMISSIONE ASIMMETRICA 16LED

LIGHTING FIXTURE WITH BRACKET L. 440 ASYMMETRICAL EMISSION 16LED




CODICE CODE	FASCIO BEAM		WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
SP04W/▲P90CP		ASIMMETRICO CICLO-PEDONALE ASYMMETRIC CYCLE-PEDESTRIAN	45W	7160 lm	5730 lm	220-240Vac 50/60Hz	I	66	08	>80
SP04W/▲P90PP		ASIMMETRICO PARCHEGGI/GRANDI AREE ASYMMETRIC PARKING/BIG AREAS	45W	7160 lm	5730 lm	220-240Vac 50/60Hz	I	66	08	>80
SP04W/▲P90ST		ASIMMETRICO STRADALE STREET ASYMMETRIC	45W	7160 lm	5730 lm	220-240Vac 50/60Hz	I	66	08	>80

VETRO EXTRACHIARO TRASPARENTE TEMPRATO - EXTRA CLEAR TRANSPARENT TEMPERED GLASS

DALI DISPONIBILE SU RICHIESTA - DALI AVAILABLE ON REQUEST

CORPO ILLUMINANTE CON STAFFA L. 440 EMISSIONE ASIMMETRICA 24LED

LIGHTING FIXTURE WITH BRACKET L. 440 ASYMMETRICAL EMISSION 24LED



CODICE CODE	FASCIO BEAM		WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
SP07W/▲P10CP		ASIMMETRICO CICLO-PEDONALE ASYMMETRIC CYCLE-PEDESTRIAN	75W	12540 lm	9880 lm	220-240Vac 50/60Hz	I	66	08	>80
SP07W/▲P10PP		ASIMMETRICO PARCHEGGI/GRANDI AREE ASYMMETRIC PARKING/BIG AREAS	75W	12540 lm	9880 lm	220-240Vac 50/60Hz	I	66	08	>80
SP07W/▲P10ST		ASIMMETRICO STRADALE STREET ASYMMETRIC	75W	12540 lm	9880 lm	220-240Vac 50/60Hz	I	66	08	>80

VETRO EXTRACHIARO TRASPARENTE TEMPRATO - EXTRA CLEAR TRANSPARENT TEMPERED GLASS

DALI DISPONIBILE SU RICHIESTA - DALI AVAILABLE ON REQUEST

CORPO ILLUMINANTE CON STAFFA L. 440 EMISSIONE ASIMMETRICA 36LED

LIGHTING FIXTURE WITH BRACKET L. 440 ASYMMETRICAL EMISSION 36LED



CODICE CODE	FASCIO BEAM		WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
SP10W/▲P90CP		ASIMMETRICO CICLO-PEDONALE ASYMMETRIC CYCLE-PEDESTRIAN	100W	16150 lm	12900 lm	220-240Vac 50/60Hz	I	66	08	>80
SP10W/▲P90PP		ASIMMETRICO PARCHEGGI/GRANDI AREE ASYMMETRIC PARKING/BIG AREAS	100W	16150 lm	12900 lm	220-240Vac 50/60Hz	I	66	08	>80
SP10W/▲P90ST		ASIMMETRICO STRADALE STREET ASYMMETRIC	100W	16150 lm	12900 lm	220-240Vac 50/60Hz	I	66	08	>80


VETRO EXTRACHIARO TRASPARENTE TEMPRATO - EXTRA CLEAR TRANSPARENT TEMPERED GLASS

DALI DISPONIBILE SU RICHIESTA - DALI AVAILABLE ON REQUEST

ACCESSORI

ACCESSORIES


MOR683P/2V	CONNETTORE IP68 3POLI/2VIE 3 X 2.5 MM² CONNECTOR IP68 3POLES/2WAYS 3 X 2.5 MM²	MOR685P/4VS	SCATOLA DI CONNESSIONE IP68 5POLI/4VIE 5 X 4 MM² CONNECTION BOX IP68 5POLES/4WAYS 5 X 4 MM²
MOR685P/3VS	SCATOLA DI CONNESSIONE IP68 5POLI/3VIE 5 X 4 MM² CONNECTION BOX IP68 5POLES/3WAYS 5 X 4 MM²	E.TRA.580	LIMITATORE DI SOVRATENSIONE CL I - IP67 SURGE PROTECTOR CL I - IP67

CORPO ILLUMINANTE CON STAFFA L. 540 EMISSIONE ASIMMETRICA 48LED*LIGHTING FIXTURE WITH BRACKET L. 540 ASYMMETRICAL EMISSION 48LED*

CODICE CODE	FASCIO BEAM		WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
SG15W/▲P50CP		ASIMMETRICO CICLO-PEDONALE ASYMMETRIC CYCLE-PEDESTRIAN	150W	24130 lm	19200 lm	220-240Vac 50/60Hz	I	66	08	>80
SG15W/▲P50PP		ASIMMETRICO PARCHEGGI/GRANDI AREE ASYMMETRIC PARKING/BIG AREAS	150W	24130 lm	19200 lm	220-240Vac 50/60Hz	I	66	08	>80
SG15W/▲P50ST		ASIMMETRICO STRADALE STREET ASYMMETRIC	150W	24130 lm	19200 lm	220-240Vac 50/60Hz	I	66	08	>80

VETRO EXTRACHIARO TRASPARENTE TEMPRATO - EXTRA CLEAR TRANSPARENT TEMPERED GLASS

DALI DISPONIBILE SU RICHIESTA - DALI AVAILABLE ON REQUEST

CORPO ILLUMINANTE CON STAFFA L. 540 EMISSIONE ASIMMETRICA 64LED*LIGHTING FIXTURE WITH BRACKET L. 540 ASYMMETRICAL EMISSION 64LED*

CODICE CODE	FASCIO BEAM		WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
SG20W/▲P55CP		ASIMMETRICO CICLO-PEDONALE ASYMMETRIC CYCLE-PEDESTRIAN	205W	31800 lm	25730 lm	220-240Vac 50/60Hz	I	66	08	>80
SG20W/▲P55PP		ASIMMETRICO PARCHEGGI/GRANDI AREE ASYMMETRIC PARKING/BIG AREAS	205W	31800 lm	25730 lm	220-240Vac 50/60Hz	I	66	08	>80
SG20W/▲P55ST		ASIMMETRICO STRADALE STREET ASYMMETRIC	205W	31800 lm	25730 lm	220-240Vac 50/60Hz	I	66	08	>80

VETRO EXTRACHIARO TRASPARENTE TEMPRATO - EXTRA CLEAR TRANSPARENT TEMPERED GLASS

DALI DISPONIBILE SU RICHIESTA - DALI AVAILABLE ON REQUEST


ACCESSORI*ACCESSORIES*

MOR683P/2V	CONNETTORE IP68 3POLI/2VIE 3 X 2.5 MM ² CONNECTOR IP68 3POLES/2WAYS 3 X 2.5 MM ²	MOR685P/4VS	SCATOLA DI CONNESSIONE IP68 5POLI/4VIE 5 X 4 MM ² CONNECTION BOX IP68 5POLES/4WAYS 5 X 4 MM ²
MOR685P/3VS	SCATOLA DI CONNESSIONE IP68 5POLI/3VIE 5 X 4 MM ² CONNECTION BOX IP68 5POLES/3WAYS 5 X 4 MM ²	E.TRA.580	LIMITATORE DI SOVRATENSIONE CL I - IP67 SURGE PROTECTOR CL I - IP67

MOON TP

TESTA PER PALO STRADALE L. 440 EMISSIONE ASIMMETRICA 16LED

HEAD FOR STREET LIGHT POLE L. 440 ASYMMETRICAL EMISSION 16LED

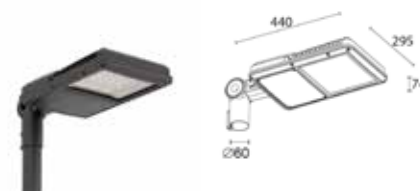


CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
SP04H/▲P90CP	ASIMMETRICO CICLO-PEDONALE ASYMMETRIC CYCLE-PEDESTRIAN	45W	7160 lm	5730 lm	220-240Vac 50/60Hz	I	66	08	>80
SP04H/▲P90PP	ASIMMETRICO PARCHEGGI/GRANDI AREE ASYMMETRIC PARKING/BIG AREAS	45W	7160 lm	5730 lm	220-240Vac 50/60Hz	I	66	08	>80
SP04H/▲P90ST	ASIMMETRICO STRADALE STREET ASYMMETRIC	45W	7160 lm	5730 lm	220-240Vac 50/60Hz	I	66	08	>80

VETRO EXTRACHIARO TRASPARENTE TEMPRATO - EXTRA CLEAR TRANSPARENT TEMPERED GLASS

DALI DISPONIBILE SU RICHIESTA - DALI AVAILABLE ON REQUEST

TESTA PER PALO STRADALE L. 440 EMISSIONE ASIMMETRICA 24LED

HEAD FOR STREET LIGHT POLE L. 440 ASYMMETRICAL EMISSION 24LED

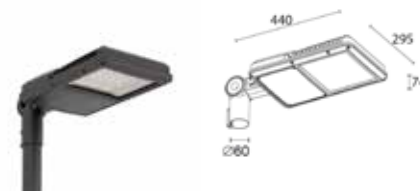


CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
SP07H/▲P10CP	ASIMMETRICO CICLO-PEDONALE ASYMMETRIC CYCLE-PEDESTRIAN	75W	12540 lm	9880 lm	220-240Vac 50/60Hz	I	66	08	>80
SP07H/▲P10PP	ASIMMETRICO PARCHEGGI/GRANDI AREE ASYMMETRIC PARKING/BIG AREAS	75W	12540 lm	9880 lm	220-240Vac 50/60Hz	I	66	08	>80
SP07H/▲P10ST	ASIMMETRICO STRADALE STREET ASYMMETRIC	75W	12540 lm	9880 lm	220-240Vac 50/60Hz	I	66	08	>80

VETRO EXTRACHIARO TRASPARENTE TEMPRATO - EXTRA CLEAR TRANSPARENT TEMPERED GLASS

DALI DISPONIBILE SU RICHIESTA - DALI AVAILABLE ON REQUEST

TESTA PER PALO STRADALE L. 440 EMISSIONE ASIMMETRICA 36LED

HEAD FOR STREET LIGHT POLE L. 440 ASYMMETRICAL EMISSION 36LED

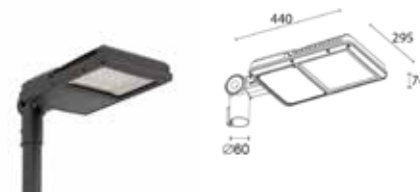

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
SP10H/▲P90CP	ASIMMETRICO CICLO-PEDONALE ASYMMETRIC CYCLE-PEDESTRIAN	100W	16150 lm	12900 lm	220-240Vac 50/60Hz	I	66	08	>80
SP10H/▲P90PP	ASIMMETRICO PARCHEGGI/GRANDI AREE ASYMMETRIC PARKING/BIG AREAS	100W	16150 lm	12900 lm	220-240Vac 50/60Hz	I	66	08	>80
SP10H/▲P90ST	ASIMMETRICO STRADALE STREET ASYMMETRIC	100W	16150 lm	12900 lm	220-240Vac 50/60Hz	I	66	08	>80

VETRO EXTRACHIARO TRASPARENTE TEMPRATO - EXTRA CLEAR TRANSPARENT TEMPERED GLASS

DALI DISPONIBILE SU RICHIESTA - DALI AVAILABLE ON REQUEST

ACCESSORI

ACCESSORIES


MOR683P/2V	CONNETTORE IP68 3POLI/2VIE 3 X 2.5 MM² CONNECTOR IP68 3POLES/2WAYS 3 X 2.5 MM²	MOR685P/4VS	SCATOLA DI CONNESSIONE IP68 5POLI/4VIE 5 X 4 MM² CONNECTION BOX IP68 5POLES/4WAYS 5 X 4 MM²
MOR685P/3VS	SCATOLA DI CONNESSIONE IP68 5POLI/3VIE 5 X 4 MM² CONNECTION BOX IP68 5POLES/3WAYS 5 X 4 MM²	E.TRA.580	LIMITATORE DI SOVRATENSIONE CL I - IP67 SURGE PROTECTOR CL I - IP67

TESTA PER PALO STRADALE L. 540 EMISSIONE ASIMMETRICA 48LED*HEAD FOR STREET LIGHT POLE L. 540 ASYMMETRICAL EMISSION 48LED*

CODICE CODE	FASCIO BEAM		WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
SG15H/▲P50CP	 ASIMMETRICO CICLO-PEDONALE ASYMMETRIC CYCLE-PEDESTRIAN		150W	24130 lm	19200 lm	220-240Vac 50/60Hz	I	66	08	>80
SG15H/▲P50PP	 ASIMMETRICO PARCHEGGI/GRANDI AREE ASYMMETRIC PARKING/BIG AREAS		150W	24130 lm	19200 lm	220-240Vac 50/60Hz	I	66	08	>80
SG15H/▲P50ST	 ASIMMETRICO STRADALE STREET ASYMMETRIC		150W	24130 lm	19200 lm	220-240Vac 50/60Hz	I	66	08	>80

VETRO EXTRACHIARO TRASPARENTE TEMPRATO – EXTRA CLEAR TRANSPARENT TEMPERED GLASS

DALI DISPONIBILE SU RICHIESTA – DALI AVAILABLE ON REQUEST

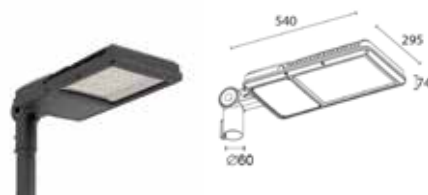TESTA PER PALO STRADALE L. 540 EMISSIONE ASIMMETRICA 64LED*HEAD FOR STREET LIGHT POLE L. 540 ASYMMETRICAL EMISSION 64LED*

CODICE CODE	FASCIO BEAM		WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
SG20H/▲P55CP	 ASIMMETRICO CICLO-PEDONALE ASYMMETRIC CYCLE-PEDESTRIAN		205W	31800 lm	25730 lm	220-240Vac 50/60Hz	I	66	08	>80
SG20H/▲P55PP	 ASIMMETRICO PARCHEGGI/GRANDI AREE ASYMMETRIC PARKING/BIG AREAS		205W	31800 lm	25730 lm	220-240Vac 50/60Hz	I	66	08	>80
SG20H/▲P55ST	 ASIMMETRICO STRADALE STREET ASYMMETRIC		205W	31800 lm	25730 lm	220-240Vac 50/60Hz	I	66	08	>80

VETRO EXTRACHIARO TRASPARENTE TEMPRATO – EXTRA CLEAR TRANSPARENT TEMPERED GLASS

DALI DISPONIBILE SU RICHIESTA – DALI AVAILABLE ON REQUEST

ACCESSORI*ACCESSORIES*

MOR683P/2V	CONNETTORE IP68 3POLI/2VIE 3 X 2.5 MM² CONNECTOR IP68 3POLES/2WAYS 3 X 2.5 MM²	MOR685P/4VS	SCATOLA DI CONNESSIONE IP68 5POLI/4VIE 5 X 4 MM² CONNECTION BOX IP68 5POLES/4WAYS 5 X 4 MM²
MOR685P/3VS	SCATOLA DI CONNESSIONE IP68 5POLI/3VIE 5 X 4 MM² CONNECTION BOX IP68 5POLES/3WAYS 5 X 4 MM²	E.TRA.580	LIMITATORE DI SOVRATENSIONE CL I – IP67 SURGE PROTECTOR CL I – IP67

