



BLOOM MAXI

Proiettore orientabile maxi
Maxi adjustable floodlight

DESCRIZIONE *DESCRIZIONE*

La forma minimale conferisce alla serie Bloom Maxi larga adattabilità ad ogni progetto. Le misure ridotte garantiscono totale flessibilità, permettendo l'integrazione di Bloom Maxi in molteplici contesti. La sua versatilità può essere contestualizzata in giardini, per l'illuminazione di piante, siepi, aree fiorite o per valorizzare elementi architettonici, poiché la Luce è l'elemento fondamentale per una corretta percezione degli oggetti, degli spazi, delle emozioni.

The minimal shape gives the Bloom Maxi series wide adaptability to any project. The reduced sizes guarantee total flexibility, allowing the integration of Bloom Maxi in multiple contexts. Its versatility can be contextualized in gardens, for the lighting of plants, hedges, flowered areas or to enhance architectural elements, since Light is the fundamental element for a correct perception of objects, spaces and emotions.

INSTALLAZIONE *INSTALLATION*

Installazione a terra, parete o soffitto

Ground, wall or ceiling installation

CORPO *BODY*

Alluminio da tornitura Serie 6000 anticorodal, per maggiore resistenza alla corrosione

Anticorodal turning aluminum 6000 Series, for greater corrosion resistance

SCHERMO *SCREEN*

Vetro extrachiaro trasparente temprato

Extra clear transparent tempered glass

GUARNIZIONI *SEALS*

EPDM

EPDM

VITERIA *SCREWS*

Acciaio inox A2

Stainless steel A2

VERNICIATURA *FINISHING*

Polvere poliestere stabilizzata ai raggi UV con trattamento anticorrosione

Anti-corrosive UV stabilized polyester powder







**CONFIG.
CODICE**
CODE
CONFIG.



▲ → **H=2700K**
W=3000K
N=4000K

**VERSIONE IN
TENSIONE**
CONSTANT
VOLTAGE

15W CON DRIVER REMOTO 24Vdc
15W REMOTE DRIVER 24Vdc

**VERSIONE IN
CORRENTE**
CONSTANT
CURRENT

15W CON DRIVER REMOTO MAX 700mA DC
15W REMOTE DRIVER MAX 700mA DC

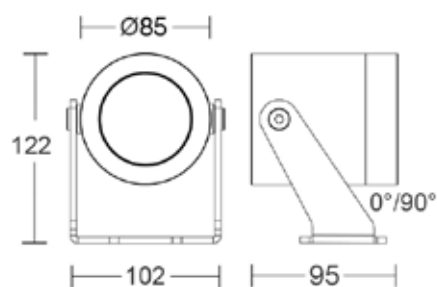


IP 66

IK 09



**HUB
SYSTEM**

PROIETTORE ORIENTABILE
24VDC
ADJUSTABLE FLOODLIGHT
24VDC



CODICE <i>CODE</i>	FASCIO <i>BEAM</i>	WATT	SORGENTE <i>SOURCE</i>	APPARECCHIO <i>FIXTURE</i>	ALIMENTAZIONE <i>POWER SUPPLY</i>	CL	IP	IK	CRI
5085W/▲RRCNB	 STRETTO/10° <i>NARROW/10°</i>	15W	1700 lm	1530 lm	24Vdc	III	66	09	80
5085W/▲RRCMB	 MEDIO/26° <i>MEDIUM/26°</i>	15W	1700 lm	1500 lm	24Vdc	III	66	09	80
5085W/▲RRCWB	 LARGO/56° <i>WIDE/56°</i>	15W	1700 lm	1440 lm	24Vdc	III	66	09	80


VETRO EXTRACHIARO TRASPARENTE TEMPRATO – EXTRA CLEAR TRANSPARENT TEMPERED GLASS
 ON/OFF

ACCESSORI

ACCESSORIES

KIT.032	KIT PICCHETTO PER PROIETTORE FLOODLIGHT SPIKE KIT	E.TRA.632 1 DRIVER FOR 1-3 LAMPS	ALIMENTATORE ON/OFF 70W 24VDC IP20 DRIVER ON/OFF 70W 24VDC IP20
KIT.033	CINGHIA PER PROIETTORE STRAP FOR FLOODLIGHT	E.TRA.577 1 DRIVER FOR 1 LAMP	ALIMENTATORE ON/OFF 25W 24VDC IP67 DRIVER ON/OFF 25W 24VDC IP67
V.SCH.086.XX	HONEYCOMB PER BLOOM MAXI HONEYCOMB FOR BLOOM MAXI	E.TRA.579 1 DRIVER FOR 1-5 LAMPS	ALIMENTATORE ON/OFF 100W 24VDC IP67 DRIVER ON/OFF 100W 24VDC IP67
MOR682P/2V	CONNETTORE IP68 2POLI/2VIE 2 X 1 MM² CONNECTOR IP68 2POLES/2WAYS 2 X 1 MM²	E.TRA.592 1 DRIVER FOR 1-12 LAMPS	ALIMENTATORE ON/OFF ELG 240W 24VDC IP67 DRIVER ON/OFF ELG 240W 24VDC IP67
MOR685P/3VS	SCATOLA DI CONNESSIONE IP68 5POLI/3VIE 5 X 4 MM² CONNECTION BOX IP68 5POLES/3WAYS 5 X 4 MM²	HUB.24V.001.ND 1 HUB FOR 1-4 LAMPS	HUB 70W 24VDC IP66 ON/OFF HUB 70W 24VDC IP66 ON/OFF
MOR685P/4VS	SCATOLA DI CONNESSIONE IP68 5POLI/4VIE 5 X 4 MM² CONNECTION BOX IP68 5POLES/4WAYS 5 X 4 MM²		

PROIETTORE ORIENTABILE
MAX 700MA
ADJUSTABLE FLOODLIGHT
MAX 700MA

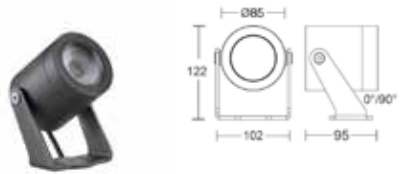

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
5085W/▲RCCNB	STRETTO/10° NARROW/10°	15W	1700 lm	1530 lm	max 700mA	III	66	09	80
5085W/▲RCCMB	MEDIO/26° MEDIUM/26°	15W	1700 lm	1500 lm	max 700mA	III	66	09	80
5085W/▲RCCWB	LARGO/56° WIDE/56°	15W	1700 lm	1440 lm	max 700mA	III	66	09	80

VETRO EXTRACHIARO TRASPARENTE TEMPRATO – EXTRA CLEAR TRANSPARENT TEMPERED GLASS

DIMMERABILE – DIMMABLE

ACCESSORI
ACCESSORIES

KIT.032	KIT PICCHETTO PER PROIETTORE FLOODLIGHT SPIKE KIT	E.TRA.635.700 1 DRIVER FOR 1-3 LAMPS	ALIMENTATORE DALI2 60W 700MA IP20 DRIVER DALI2 60W 700MA IP20
KIT.033	CINGHIA PER PROIETTORE STRAP FOR FLOODLIGHT	E.TRA.636.700 1 DRIVER FOR 1-3 LAMPS	ALIMENTATORE CASAMBI 60W 700MA IP20 DRIVER CASAMBI 60W 700MA IP20
V.SCH.086.XX	HONEYCOMB PER BLOOM MAXI HONEYCOMB FOR BLOOM MAXI	E.TRA.658.700 1 DRIVER FOR 1-2 LAMPS	ALIMENTATORE ON/OFF 23W 700MA IP67 DRIVER ON/OFF 23W 700MA IP67
MOR682P/2V	CONNETTORE IP68 2POLI/2VIE 2 X 1 MM² CONNECTOR IP68 2POLES/2WAYS 2 X 1 MM²	E.TRA.659.700 1 DRIVER FOR 1-2 LAMPS	ALIMENTATORE DALI2 23W 700MA IP67 DRIVER DALI2 23W 700MA IP67
MOR685P/3VS	SCATOLA DI CONNESSIONE IP68 5POLI/3VIE 5 X 4 MM² CONNECTION BOX IP68 5POLES/3WAYS 5 X 4 MM²	HUB.700.001.ND 1 DRIVER FOR 1-3 LAMPS	HUB 700MA IP66 ON/OFF CON DRIVER 60W IP20 HUB 700MA IP66 ON/OFF WITH DRIVER 60W IP20
MOR685P/4VS	SCATOLA DI CONNESSIONE IP68 5POLI/4VIE 5 X 4 MM² CONNECTION BOX IP68 5POLES/4WAYS 5 X 4 MM²	HUB.700.001.DA2 1 DRIVER FOR 1-3 LAMPS	HUB 700MA IP66 DALI-2 CON DRIVER 60W IP20 HUB 700MA IP66 DALI-2 WITH DRIVER 60W IP20
E.TRA.621.700 1 DRIVER FOR 1 LAMP	ALIMENTATORE ON/OFF 20W 700MA IP20 DRIVER ON/OFF 20W 700MA IP20	HUB.700.001.CA 1 DRIVER FOR 1-3 LAMPS	HUB 700MA IP66 CASAMBI CON DRIVER 60W IP20 HUB 700MA IP66 CASAMBI WITH DRIVER 60W IP20
E.TRA.634.700 1 DRIVER FOR 1-3 LAMPS	ALIMENTATORE ON/OFF 60W 700MA IP20 DRIVER ON/OFF 60W 700MA IP20		

ACCESSORI

ACCESSORIES

CONNETTORI

CONNECTORS



MOR682P/2V

Connettore IP68 2Poli/2Vie 2 x 1 mm²
Connector IP68 2Poles/2Ways 2 x 1 mm²
 L 72 x Ø 22



MOR685P/3VS

Scatola di connessione IP68 5Poli/3Vie 5 x 4 mm²
Connection Box IP68 5Poles/3Ways 5 x 4 mm²
 L 127 x W 93 x H 35



MOR685P/4VS

Scatola di connessione IP68 5Poli/4Vie 5 x 4 mm²
Connection Box IP68 5Poles/4Ways 5 x 4 mm²
 L 113 x W 93 x H 35

FISSAGGIO

FIXING



KIT.032

Kit picchetto per proiettore
Floodlight Spike Kit
 H 235 x Ø 85



KIT.033

Cinghia per proiettore
Strap for floodlight
 L 2000 x H 25

VISIERE

VISORS




V.SCH.086.XX

Honeycomb per Bloom Maxi
Honeycomb for Bloom Maxi
 Ø 59 x H 5

ALIMENTATORI 24Vdc

DRIVER 24Vdc

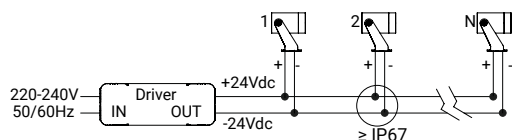

Collegamento in Parallelo
 Parallel Wiring



E.TRA.577

1 Driver for 1 Lamp

Alimentatore ON/OFF 25W 24Vdc IP67
Driver ON/OFF 25W 24Vdc IP67
 L 148 x W 40 x H 32



E.TRA.579

1 Driver for 1-5 Lamps

Alimentatore ON/OFF 100W 24Vdc IP67
Driver ON/OFF 100W 24Vdc IP67
 L 140 x W 63 x H 32



E.TRA.592

1 Driver for 1-12 Lamps

Alimentatore ON/OFF ELG 240W 24Vdc IP67
Driver ON/OFF ELG 240W 24Vdc IP67
 L 244 x W 71 x H 38




E.TRA.632

1 Driver for 1-3 Lamps

Alimentatore ON/OFF 70W 24Vdc IP20
Driver ON/OFF 70W 24Vdc IP20
 L 124 x W 80 x H 22

HUB – SISTEMI DI CONNESSIONE SEMPLIFICATA 24Vdc

HUB – READY TO CONNECT SYSTEM 24Vdc

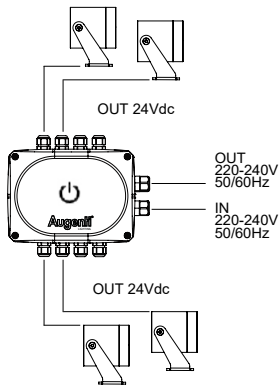


HUB.24V.001.ND
1 Hub for 1-4 Lamps

Hub 70W 24Vdc IP66 ON/OFF
Hub 70W 24Vdc IP66 ON/OFF
L 235 x W 200 x H 92

ALIMENTATORI CC – 700mA

DRIVER CC – 700mA

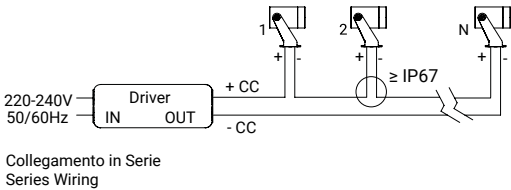

E.TRA.621.700
1 Driver for 1 Lamp

Alimentatore ON/OFF 20W 700mA IP20
Driver ON/OFF 20W 700mA IP20
L 111 x W 52 x H 22



E.TRA.634.700
1 Driver for 1-3 Lamps

Alimentatore ON/OFF 60W 700mA IP20
Driver ON/OFF 60W 700mA IP20
L 124 x W 80 x H 22



E.TRA.635.700
1 Driver for 1-3 Lamps

Alimentatore DALI2 60W 700mA IP20
Driver DALI2 60W 700mA IP20
L 124 x W 80 x H 22



E.TRA.636.700
1 Driver for 1-3 Lamps

Alimentatore CASAMBI 60W 700mA IP20
Driver CASAMBI 60W 700mA IP20
L 124 x W 80 x H 22



E.TRA.658.700
1 Driver for 1-2 Lamps

Alimentatore ON/OFF 23W 700mA IP67
Driver ON/OFF 23W 700mA IP67
L 124 x W 47 x H 26




E.TRA.659.700
1 Driver for 1-2 Lamps

Alimentatore DALI2 23W 700mA IP67
Driver DALI2 23W 700mA IP67
L 124 x W 47 x H 26

HUB – SISTEMI DI CONNESSIONE SEMPLIFICATA CC 700mA

HUB – READY TO CONNECT SYSTEM CC 700mA

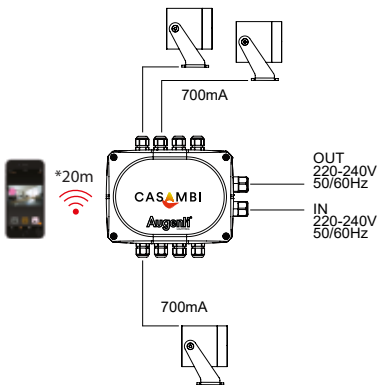

HUB.700.001.CA
1 Driver for 1-3 Lamps

Hub 700mA IP66 CASAMBI con driver 60W IP20
Hub 700mA IP66 CASAMBI with driver 60W IP20
L 235 x W 200 x H 92



HUB.700.001.DA2
1 Driver for 1-3 Lamps

Hub 700mA IP66 DALI-2 con driver 60W IP20
Hub 700mA IP66 DALI-2 with driver 60W IP20
L 235 x W 200 x H 92



HUB.700.001.ND
1 Driver for 1-3 Lamps

Hub 700mA IP66 ON/OFF con driver 60W IP20
Hub 700mA IP66 ON/OFF with driver 60W IP20
L 235 x W 200 x H 92

