



MATRIX MINI

Proiettore orientabile lineare
Adjustable linear floodlight

DESCRIZIONE *DESCRIZIONE*

Apparecchio orientabile lineare, adatto ad essere installato a parete, soffitto o a terra come proiettore stand-alone. Dotato di ottiche secondarie per diverse distribuzioni della luce, questa versione di Matrix è particolarmente adatta all'illuminazione radente su facciate di edifici, per risaltarne la consistenza materica, o per accentuare i dettagli architettonici di un edificio storico.

Adjustable linear floodlight, suitable for wall, ceiling or ground installation as a stand-alone floodlight. Equipped with secondary optics for different types of light distribution, this Matrix version is particularly suited for the oblique illumination of building façades, to highlight their texture or accentuate the architectural details of historical buildings.

INSTALLAZIONE *INSTALLATION*

Installazione a terra, parete o soffitto

Ground, wall or ceiling installation

CORPO *BODY*

Alluminio estruso

Extruded aluminium

SCHERMO *SCREEN*

Vetro extrachiaro temprato

Extra clear tempered glass

VITERIA *SCREWS*

Acciaio inox A2


Stainless steel A2

VERNICIATURA *FINISHING*

Polvere poliestere stabilizzata ai raggi UV con trattamento anticorrosione

Anti-corrosive UV stabilized polyester powder



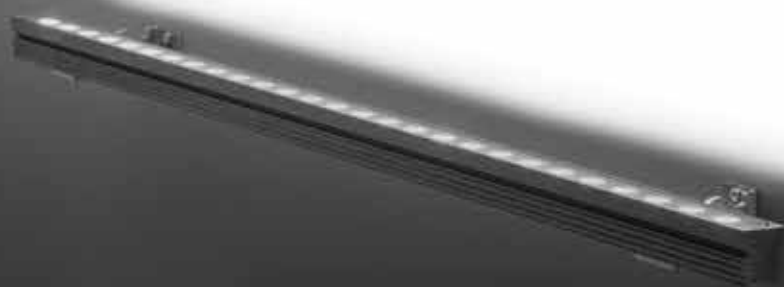







**CONFIG.
CODICE**
CODE
CONFIG.

▲ → **H=2700K**
W=3000K
N=4000K

**VERSIONE IN
TENSIONE**
CONSTANT
VOLTAGE

8W-16W CON DRIVER REMOTO 24Vdc
8W-16W REMOTE DRIVER 24Vdc




IP 67

IK 08



**HUB
SYSTEM**

PROIETTORE LINEARE CON LENTI L. 530
24VDC
LINEAR FLOODLIGHT WITH LENS L. 530
24VDC

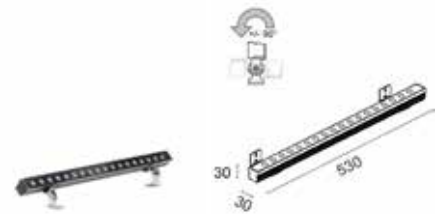

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
2811P/▲PRCNB	 STRETTO/20° NARROW/20°	8W	900 lm	785 lm	24Vdc	III	67	08	>80
2811P/▲PRCWB	 LARGO/45° WIDE/45°	8W	900 lm	785 lm	24Vdc	III	67	08	>80
2811P/▲PRCOB	 OVALE/20°X40° OVAL/20°X40°	8W	900 lm	785 lm	24Vdc	III	67	08	>80

VETRO EXTRACHIARO TRASPARENTE TEMPRATO 4 MM - EXTRA CLEAR TRANSPARENT TEMPERED GLASS 4 MM

DIMMERABILE - DIMMABLE

PROIETTORE LINEARE EMISSIONE DIFFUSA L. 530
24VDC
LINEAR FLOODLIGHT DIFFUSE EMISSION L. 530
24VDC



CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
2811P/▲RRCVS	 DIFFUSO DIFFUSED	8W	1130 lm	280 lm	24Vdc	III	67	08	>80

VETRO EXTRACHIARO OPALE TEMPRATO 4 MM - EXTRA CLEAR OPAL TEMPERED GLASS 4 MM

DIMMERABILE - DIMMABLE

ACCESSORI

ACCESSORIES

F.PIA.463.530	VISIERA ANTIABBLAGIAMENTO PER MATRIX MINI ANTI-GLARE VISOR FOR MATRIX MINI	E.TRA.633 1 DRIVER FOR 1-10 LAMPS	ALIMENTATORE DALI 100W 24VDC IP67 DRIVER DALI 100W 24VDC IP67
MOR682P/2V	CONNETTORE IP68 2POLI/2VIE 2 X 1 MM² CONNECTOR IP68 2POLES/2WAYS 2 X 1 MM²	E.TRA.577 1 DRIVER FOR 1-2 LAMPS	ALIMENTATORE ON/OFF 25W 24VDC IP67 DRIVER ON/OFF 25W 24VDC IP67
MOR685P/3VS	SCATOLA DI CONNESSIONE IP68 5POLI/3VIE 5 X 4 MM² CONNECTION BOX IP68 5POLES/3WAYS 5 X 4 MM²	E.TRA.579 1 DRIVER FOR 3-10 LAMPS	ALIMENTATORE ON/OFF 100W 24VDC IP67 DRIVER ON/OFF 100W 24VDC IP67
MOR685P/4VS	SCATOLA DI CONNESSIONE IP68 5POLI/4VIE 5 X 4 MM² CONNECTION BOX IP68 5POLES/4WAYS 5 X 4 MM²	HUB.24V.001.ND 1 HUB FOR 1-8 LAMPS	HUB 70W 24VDC IP66 ON/OFF HUB 70W 24VDC IP66 ON/OFF
E.TRA.631 1 DRIVER FOR 1 LAMP	ALIMENTATORE ON/OFF 15W 24VDC IP20 DRIVER ON/OFF 15W 24VDC IP20	HUB.24V.001.DA2 1 HUB FOR 1-8 LAMPS	HUB 70W 24VDC IP66 DALI-2 HUB 70W 24VDC IP66 DALI-2
E.TRA.632 1 DRIVER FOR 1-8 LAMPS	ALIMENTATORE ON/OFF 70W 24VDC IP20 DRIVER ON/OFF 70W 24VDC IP20	HUB.24V.001.CA 1 HUB FOR 1-8 LAMPS	HUB 70W 24VDC IP66 CASAMBI HUB 70W 24VDC IP66 CASAMBI

PROIETTORE LINEARE CON LENTI L. 780
24VDC
LINEAR FLOODLIGHT WITH LENS L. 780
24VDC



CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
2812P/▲PRCNB	STRETTO/20° NARROW/20°	12W	1350 lm	1180 lm	24Vdc	III	67	08	>80
2812P/▲PRCWB	LARGO/45° WIDE/45°	12W	1350 lm	1180 lm	24Vdc	III	67	08	>80
2812P/▲PRCOB	OVALE/20°X40° OVAL/20°X40°	12W	1350 lm	1180 lm	24Vdc	III	67	08	>80

VETRO EXTRACHIARO TRASPARENTE TEMPRATO 4 MM - EXTRA CLEAR TRANSPARENT TEMPERED GLASS 4 MM

DIMMERABILE - DIMMABLE

PROIETTORE LINEARE EMISSIONE DIFFUSA L. 780
24VDC
LINEAR FLOODLIGHT DIFFUSE EMISSION L. 780
24VDC



CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
2812P/▲RRCVS	DIFFUSO DIFFUSED	12W	1700 lm	420 lm	24Vdc	III	67	08	>80


VETRO EXTRACHIARO OPALE TEMPRATO 4 MM - EXTRA CLEAR OPAL TEMPERED GLASS 4 MM

DIMMERABILE - DIMMABLE

ACCESSORI

ACCESSORIES

F.PIA.463.780	VISIERA ANTIABBAGLIAMENTO PER MATRIX MINI ANTI-GLARE VISOR FOR MATRIX MINI	E.TRA.633 1 DRIVER FOR 1-7 LAMPS	ALIMENTATORE DALI 100W 24VDC IP67 DRIVER DALI 100W 24VDC IP67
MOR682P/2V	CONNETTORE IP68 2POLI/2VIE 2 X 1 MM² CONNECTOR IP68 2POLES/2WAYS 2 X 1 MM²	E.TRA.577 1 DRIVER FOR 1 LAMP	ALIMENTATORE ON/OFF 25W 24VDC IP67 DRIVER ON/OFF 25W 24VDC IP67
MOR685P/3VS	SCATOLA DI CONNESSIONE IP68 5POLI/3VIE 5 X 4 MM² CONNECTION BOX IP68 5POLES/3WAYS 5 X 4 MM²	E.TRA.579 1 DRIVER FOR 2-7 LAMPS	ALIMENTATORE ON/OFF 100W 24VDC IP67 DRIVER ON/OFF 100W 24VDC IP67
MOR685P/4VS	SCATOLA DI CONNESSIONE IP68 5POLI/4VIE 5 X 4 MM² CONNECTION BOX IP68 5POLES/4WAYS 5 X 4 MM²	HUB.24V.001.ND 1 HUB FOR 1-5 LAMPS	HUB 70W 24VDC IP66 ON/OFF HUB 70W 24VDC IP66 ON/OFF
E.TRA.631 1 DRIVER FOR 1 LAMP	ALIMENTATORE ON/OFF 15W 24VDC IP20 DRIVER ON/OFF 15W 24VDC IP20	HUB.24V.001.DA2 1 HUB FOR 1-5 LAMPS	HUB 70W 24VDC IP66 DALI-2 HUB 70W 24VDC IP66 DALI-2
E.TRA.632 1 DRIVER FOR 1-5 LAMPS	ALIMENTATORE ON/OFF 70W 24VDC IP20 DRIVER ON/OFF 70W 24VDC IP20	HUB.24V.001.CA 1 HUB FOR 1-5 LAMPS	HUB 70W 24VDC IP66 CASAMBI HUB 70W 24VDC IP66 CASAMBI

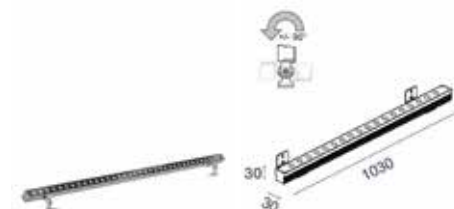PROIETTORE LINEARE CON LENTI L. 1030**24VDC***LINEAR FLOODLIGHT WITH LENS L. 1030***24VDC**

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
2813P/▲PRCNB	STRETTO/20° NARROW/20°	16W	1800 lm	1574 lm	24Vdc	III	67	08	>80
2813P/▲PRCWB	LARGO/45° WIDE/45°	16W	1800 lm	1574 lm	24Vdc	III	67	08	>80
2813P/▲PRCOB	OVALE/20°X40° OVAL/20°X40°	16W	1800 lm	1574 lm	24Vdc	III	67	08	>80

VETRO EXTRACHIARO TRASPARENTE TEMPRATO 4 MM - EXTRA CLEAR TRANSPARENT TEMPERED GLASS 4 MM

DIMMERABILE - DIMMABLE

PROIETTORE LINEARE EMISSIONE DIFFUSA L. 1030**24VDC***LINEAR FLOODLIGHT DIFFUSE EMISSION L. 1030***24VDC**

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
2813P/▲RRCVS	DIFFUSO DIFFUSED	16W	2260 lm	560 lm	24Vdc	III	67	08	>80

VETRO EXTRACHIARO OPALE TEMPRATO 4 MM - EXTRA CLEAR OPAL TEMPERED GLASS 4 MM

DIMMERABILE - DIMMABLE

ACCESSORI*ACCESSORIES*

F.PIA.463.1030	VISIERA ANTIABBLAGIAMENTO PER MATRIX MINI ANTI-GLARE VISOR FOR MATRIX MINI	E.TRA.633 1 DRIVER FOR 1-5 LAMPS	ALIMENTATORE DALI 100W 24VDC IP67 DRIVER DALI 100W 24VDC IP67
MOR682P/2V	CONNETTORE IP68 2POLI/2VIE 2 X 1 MM² CONNECTOR IP68 2POLES/2WAYS 2 X 1 MM²	E.TRA.577 1 DRIVER FOR 1 LAMP	ALIMENTATORE ON/OFF 25W 24VDC IP67 DRIVER ON/OFF 25W 24VDC IP67
MOR685P/3VS	SCATOLA DI CONNESSIONE IP68 5POLI/3VIE 5 X 4 MM² CONNECTION BOX IP68 5POLES/3WAYS 5 X 4 MM²	E.TRA.579 1 DRIVER FOR 2-5 LAMPS	ALIMENTATORE ON/OFF 100W 24VDC IP67 DRIVER ON/OFF 100W 24VDC IP67
MOR685P/4VS	SCATOLA DI CONNESSIONE IP68 5POLI/4VIE 5 X 4 MM² CONNECTION BOX IP68 5POLES/4WAYS 5 X 4 MM²	HUB.24V.001.ND 1 HUB FOR 1-4 LAMPS	HUB 70W 24VDC IP66 ON/OFF HUB 70W 24VDC IP66 ON/OFF
E.TRA.631 1 DRIVER FOR 1 LAMP	ALIMENTATORE ON/OFF 15W 24VDC IP20 DRIVER ON/OFF 15W 24VDC IP20	HUB.24V.001.DA2 1 HUB FOR 1-4 LAMPS	HUB 70W 24VDC IP66 DALI-2 HUB 70W 24VDC IP66 DALI-2
E.TRA.632 1 DRIVER FOR 1-4 LAMPS	ALIMENTATORE ON/OFF 70W 24VDC IP20 DRIVER ON/OFF 70W 24VDC IP20	HUB.24V.001.CA 1 HUB FOR 1-4 LAMPS	HUB 70W 24VDC IP66 CASAMBI HUB 70W 24VDC IP66 CASAMBI

ACCESSORI

ACCESSORIES

CONNETTORI

CONNECTORS

	MOR682P/2V Connettore IP68 2Poli/2Vie 2 x 1 mm² <i>Connector IP68 2Poles/2Ways 2 x 1 mm²</i> L 72 x Ø 22
	MOR685P/3VS Scatola di connessione IP68 5Poli/3Vie 5 x 4 mm² <i>Connection Box IP68 5Poles/3Ways 5 x 4 mm²</i> L 127 x W 93 x H 35
	MOR685P/4VS Scatola di connessione IP68 5Poli/4Vie 5 x 4 mm² <i>Connection Box IP68 5Poles/4Ways 5 x 4 mm²</i> L 113 x W 93 x H 35


VISIERE

VISORS

	F.PIA.463.1030 Visiera antiabbagliamento per Matrix Mini <i>Anti-glare visor for Matrix Mini</i> L 1030
	F.PIA.463.530 Visiera antiabbagliamento per Matrix Mini <i>Anti-glare visor for Matrix Mini</i> L 530
	F.PIA.463.780 Visiera antiabbagliamento per Matrix Mini <i>Anti-glare visor for Matrix Mini</i> L 780

ALIMENTATORI 24Vdc

DRIVER 24Vdc



	E.TRA.577 Cod. 2811P - 1 Driver for 1-2 Lamps Cod. 2812P - 1 Driver for 1 Lamp Cod. 2813P - 1 Driver for 1 Lamp Alimentatore ON/OFF 25W 24Vdc IP67 <i>Driver ON/OFF 25W 24Vdc IP67</i> L 148 x W 40 x H 32
	E.TRA.579 Cod. 2811P - 1 Driver for 3-10 Lamps Cod. 2812P - 1 Driver for 2-7 Lamps Cod. 2813P - 1 Driver for 2-5 Lamps Alimentatore ON/OFF 100W 24Vdc IP67 <i>Driver ON/OFF 100W 24Vdc IP67</i> L 140 x W 63 x H 32
	E.TRA.631 Cod. 2811P - 1 Driver for 1 Lamp Cod. 2812P - 1 Driver for 1 Lamp Cod. 2813P - 1 Driver for 1 Lamp Alimentatore ON/OFF 15W 24Vdc IP20 <i>Driver ON/OFF 15W 24Vdc IP20</i> L 106 x W 33 x H 22
	E.TRA.632 Cod. 2811P - 1 Driver for 1-8 Lamps Cod. 2812P - 1 Driver for 1-5 Lamps Cod. 2813P - 1 Driver for 1-4 Lamps Alimentatore ON/OFF 70W 24Vdc IP20 <i>Driver ON/OFF 70W 24Vdc IP20</i> L 124 x W 80 x H 22
	E.TRA.633 Cod. 2811P - 1 Driver for 1-10 Lamps Cod. 2812P - 1 Driver for 1-7 Lamps Cod. 2813P - 1 Driver for 1-5 Lamps Alimentatore DALI 100W 24Vdc IP67 <i>Driver DALI 100W 24Vdc IP67</i> L 175 x W 63 x H 36

HUB - SISTEMI DI CONNESSIONE SEMPLIFICATA 24Vdc

HUB - READY TO CONNECT SYSTEM 24Vdc

	HUB.24V.001.ND Cod. 2811R - 1 Driver for 1-8 Lamps Cod. 2812R - 1 Driver for 1-5 Lamps Cod. 2813R - 1 Driver for 1-4 Lamps	Hub 70W 24Vdc IP66 ON/OFF <i>Hub 70W 24Vdc IP66 ON/OFF</i> L 235 x W 200 x H 92
	HUB.24V.001.DA2 Cod. 2811R - 1 Driver for 1-8 Lamps Cod. 2812R - 1 Driver for 1-5 Lamps Cod. 2813R - 1 Driver for 1-4 Lamps	Hub 70W 24Vdc IP66 DALI-2 <i>Hub 70W 24Vdc IP66 DALI-2</i> L 235 x W 200 x H 92
	HUB.24V.001.CA Cod. 2811R - 1 Driver for 1-8 Lamps Cod. 2812R - 1 Driver for 1-5 Lamps Cod. 2813R - 1 Driver for 1-4 Lamps	Hub 70W 24Vdc IP66 CASAMBI <i>Hub 70W 24Vdc IP66 CASAMBI</i> L 235 x W 200 x H 92

