



KUBO12

Proiettore orientabile
Adjustable floodlight

DESCRIZIONE *DESCRIZIONE*

Proiettore orientabile compatto. Adatto per l'installazione a parete, a soffitto e a terra, disponibile anche versione con picchetto per la sola installazione a terra. Dotato di ottica secondaria per diverse distribuzioni di luce e con un'ampia scelta di accessori utili per il controllo del flusso luminoso e del comfort visivo. Disponibile anche la versione RGBW.

Compact adjustable floodlight. Suitable for wall, ceiling and floor installation, also available spike version for ground installation only. Equipped with secondary optics for different light distributions and with a wide selection of accessories useful for controlling the luminous flux and visual comfort. RGBW version also available.

INSTALLAZIONE *INSTALLATION*

Installazione a terra, parete o soffitto

Ground, wall or ceiling installation

CORPO *BODY*

Alluminio pressofuso

Die-cast aluminium

SCHERMO *SCREEN*

Vetro extrachiaro trasparente temprato

Extra clear transparent tempered glass

GUARNIZIONI *SEALS*

EPDM

EPDM

VITERIA *SCREWS*

Acciaio inox A2

Stainless steel A2

VERNICIATURA *FINISHING*

Polvere poliestere stabilizzata ai raggi UV con trattamento anticorrosione

Anti-corrosive UV stabilized polyester powder

RGBW

RGBW









**CONFIG.
CODICE**
CODE
CONFIG.

▲ → **H=2700K
W=3000K
N=4000K**

ALIMENTAZIONE
INPUT SUPPLY

220-240VAC 50/60HZ
220-240VAC 50/60HZ

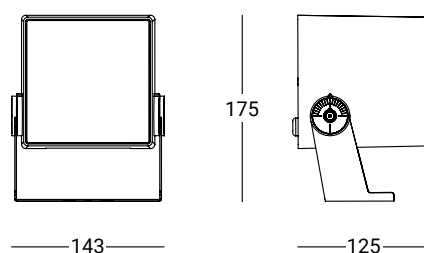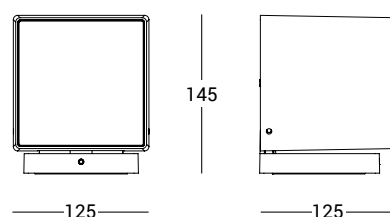


KUBO12-B

PROIETTORE ORIENTABILE

DRIVER INCORPORATO

ADJUSTABLE FLOODLIGHT

BUILT-IN DRIVER



CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
2112W/▲C35.NB	 STRETTO/10° NARROW/10°	14W	1700 lm	1270 lm	220-240Vac 50/60Hz	I	66	07	>80
2112W/▲C35.MB	 MEDIO/38° MEDIUM/38°	14W	1700 lm	1340 lm	220-240Vac 50/60Hz	I	66	07	>80
2112W/▲C35.WB	 LARGO/56° WIDE/56°	14W	1700 lm	1400 lm	220-240Vac 50/60Hz	I	66	07	>80

VETRO EXTRACHIARO TRASPARENTE TEMPRATO - EXTRA CLEAR TRANSPARENT TEMPERED GLASS

ON/OFF

ACCESSORI

ACCESSORIES

AC2112	VISIERA ANTIABBLAGAMENTO PER KUBO12 ANTI-GLARE VISOR FOR KUBO12	E.TRA.580	LIMITATORE DI SOVRATENSIONE CL I - IP67 SURGE PROTECTOR CL I - IP67
KIT.036	BRACCIO PER ESTENSIONE A PARETE EXTENSION ARM FOR WALL		

PROIETTORE ORIENTABILE DALI
DRIVER INCORPORATO
ADJUSTABLE FLOODLIGHT DALI
BUILT-IN DRIVER



CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
2112W/▲D35.NB	 STRETTO/10° NARROW/10°	14W	1700 lm	1340 lm	220-240Vac 50/60Hz	I	66	07	>80
2112W/▲D35.MB	 MEDIO/38° MEDIUM/38°	14W	1700 lm	1270 lm	220-240Vac 50/60Hz	I	66	07	>80
2112W/▲D35.WB	 LARGO/56° WIDE/56°	14W	1700 lm	1400 lm	220-240Vac 50/60Hz	I	66	07	>80

VETRO EXTRACHIARO TRASPARENTE TEMPRATO – EXTRA CLEAR TRANSPARENT TEMPERED GLASS
DALI-2 INTEGRATO – DALI-2 INTEGRATED

ACCESSORI
ACCESSORIES

AC2112	VISIERA ANTIABBAGLIAMENTO PER KUBO12 ANTI-GLARE VISOR FOR KUBO12	MOR685P/3V	CONNETTORE A Y IP68 5POLI/3VIE 5 X 2.5 MM² CONNECTOR Y IP68 5POLES/3WAYS 5 X 2.5 MM²
KIT.036	BRACCIO PER ESTENSIONE A PARETE EXTENSION ARM FOR WALL	E.TRA.580	LIMITATORE DI SOVRATENSIONE CL I – IP67 SURGE PROTECTOR CL I – IP67
MOR685P/2V	CONNETTORE IP68 5POLI/2VIE 5 X 2.5 MM² CONNECTOR IP68 5POLES/2WAYS 5 X 2.5 MM²		

KUBO12-B RGBW

RGBW

PROIETTORE ORIENTABILE RGBW

24VDC

ADJUSTABLE FLOODLIGHT RGBW

24VDC



CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
2112W/RCRC.NB	 STRETTO/10° NARROW/10°	12W with Algorithm	1650 lm	1420 lm	24Vdc	III	66	07	RGBW
2112W/RCRC.MB	 MEDIO/20° MEDIUM/20°	12W with Algorithm	1650 lm	1420 lm	24Vdc	III	66	07	RGBW
2112W/RCRC.WB	 LARGO/30° WIDE/30°	12W with Algorithm	1650 lm	1420 lm	24Vdc	III	66	07	RGBW
2112W/RCRC.SW	 MOLTO LARGO/60° SUPER WIDE/60°	12W with Algorithm	1650 lm	1420 lm	24Vdc	III	66	07	RGBW

VETRO EXTRACHIARO TRASPARENTE TEMPRATO - EXTRA CLEAR TRANSPARENT TEMPERED GLASS

DIMMERABILE - DIMMABLE

ACCESSORI

ACCESSORIES

AC2112	VISIERA ANTIABBAGLIAMENTO PER KUBO12 ANTI-GLARE VISOR FOR KUBO12	E.CNT.001	TASTIERA RGBW 16DMX CH. 12-24VDC RGBW CONTROLLER 16DMX CH. 12-24VDC
KIT.036	BRACCIO PER ESTENSIONE A PARETE EXTENSION ARM FOR WALL	E.CNT.002	TASTIERA RGBW 1024DMX CH. 5-15VDC RGBW CONTROLLER 1024DMX CH. 5-15VDC
E.TRA.579 1 DRIVER FOR 1-4 LAMPS	ALIMENTATORE ON/OFF 100W 24VDC IP67 DRIVER ON/OFF 100W 24VDC IP67	E.TRA.594	SPLITTER DMX-RDM 2 CANALI SPLITTER DMX-RDM 2 CHANNELS
E.TRA.592 1 DRIVER FOR 5-9 LAMPS	ALIMENTATORE ON/OFF ELG 240W 24VDC IP67 DRIVER ON/OFF ELG 240W 24VDC IP67		

ACCESSORI

ACCESSORIES

FISSAGGIO

FIXING



KIT.036
Braccio per estensione a parete
Extension arm for wall
L 500

VISIERE

VISORS



AC2112
Visiera antiabbagliamento per Kubo12
Anti-glare visor for Kubo12
L 125 x H 125

ALIMENTATORI 24Vdc

DRIVER 24Vdc



E.TRA.579
1 Driver for 1-4 Lamps
Alimentatore ON/OFF 100W 24Vdc IP67
Driver ON/OFF 100W 24Vdc IP67
L 140 x W 63 x H 32



E.TRA.592
1 Driver for 5-9 Lamps
Alimentatore ON/OFF ELG 240W 24Vdc IP67
Driver ON/OFF ELG 240W 24Vdc IP67
L 244 x W 71 x H 38

CENTRALINE RGBW

RGBW CONTROL UNITS



E.TRA.594
Splitter DMX-RDM 2 Canali
Splitter DMX-RDM 2 Channels
L 88 x W 54 x H 26

CONTROLLER TOUCH


TOUCH CONTROLLER



E.CNT.001
Tastiera RGBW 16DMX Ch.12-24Vdc
RGBW Controller 16DMX Ch.12-24Vdc
L 75 x W 29.5 x H 120




E.CNT.002
Tastiera RGBW 1024DMX Ch.5-15Vdc
RGBW Controller 1024DMX Ch.5-15Vdc
L 146 x W 10 x H 106

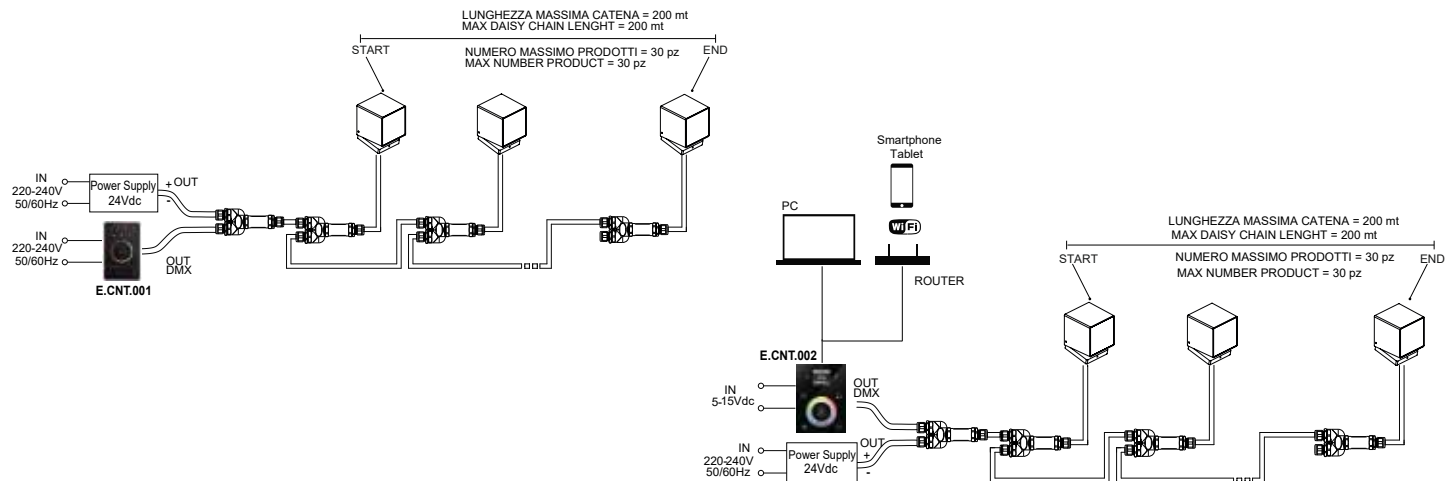

KUBO12-S

PROIETTORE ORIENTABILE
DRIVER INCORPORATO
ADJUSTABLE FLOODLIGHT
BUILT-IN DRIVER

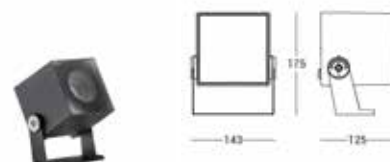

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
2113W/▲C35NB	 STRETTO/10° NARROW/10°	14W	1700 lm	1270 lm	220-240Vac 50/60Hz	I	66	07	>80
2113W/▲C35MB	 MEDIO/38° MEDIUM/38°	14W	1700 lm	1340 lm	220-240Vac 50/60Hz	I	66	07	>80
2113W/▲C35WB	 LARGO/56° WIDE/56°	14W	1700 lm	1400 lm	220-240Vac 50/60Hz	I	66	07	>80

VETRO EXTRACHIARO TRASPARENTE TEMPRATO - EXTRA CLEAR TRANSPARENT TEMPERED GLASS


ON/OFF

ACCESSORI

ACCESSORIES

KIT.032	KIT PICCHETTO PER PROIETTORE FLOODLIGHT SPIKE KIT	MOR685P/3VS	SCATOLA DI CONNESSIONE IP68 5POLI/3VIE 5 X 4 MM² CONNECTION BOX IP68 5POLES/3WAYS 5 X 4 MM²
AC2112	VISIERA ANTIABBAGLIAMENTO PER KUBO12 ANTI-GLARE VISOR FOR KUBO12	MOR685P/4VS	SCATOLA DI CONNESSIONE IP68 5POLI/4VIE 5 X 4 MM² CONNECTION BOX IP68 5POLES/4WAYS 5 X 4 MM²
KIT.036	BRACCIO PER ESTENSIONE A PARETE EXTENSION ARM FOR WALL	E.TRA.580	LIMITATORE DI SOVRATENSIONE CL I - IP67 SURGE PROTECTOR CL I - IP67
MOR683P/2V	CONNETTORE IP68 3POLI/2VIE 3 X 2.5 MM² CONNECTOR IP68 3POLES/2WAYS 3 X 2.5 MM²		

PROIETTORE ORIENTABILE DALI
DRIVER INCORPORATO
ADJUSTABLE FLOODLIGHT DALI
BUILT-IN DRIVER

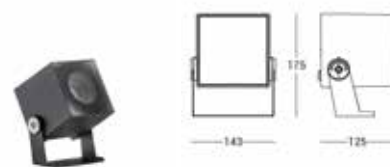

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
2113W/▲D35NB	 STRETTO/10° NARROW/10°	14W	1700 lm	1270 lm	220-240Vac 50/60Hz	I	66	07	>80
2113W/▲D35MB	 MEDIO/38° MEDIUM/38°	14W	1700 lm	1340 lm	220-240Vac 50/60Hz	I	66	07	>80
2113W/▲D35WB	 LARGO/56° WIDE/56°	14W	1700 lm	1400 lm	220-240Vac 50/60Hz	I	66	07	>80

VETRO EXTRACHIARO TRASPARENTE TEMPRATO - EXTRA CLEAR TRANSPARENT TEMPERED GLASS

DALI-2 INTEGRATO - DALI-2 INTEGRATED

ACCESSORI

ACCESSORIES

KIT.032	KIT PICCHETTO PER PROIETTORE FLOODLIGHT SPIKE KIT	MOR685P/3V	CONNETTORE A Y IP68 5POLI/3VIE 5 X 2.5 MM² CONNECTOR Y IP68 5POLES/3WAYS 5 X 2.5 MM²
AC2112	VISIERA ANTIABBAGLIAMENTO PER KUBO12 ANTI-GLARE VISOR FOR KUBO12	MOR685P/3VS	SCATOLA DI CONNESSIONE IP68 5POLI/3VIE 5 X 4 MM² CONNECTION BOX IP68 5POLES/3WAYS 5 X 4 MM²
KIT.036	BRACCIO PER ESTENSIONE A PARETE EXTENSION ARM FOR WALL	MOR685P/4VS	SCATOLA DI CONNESSIONE IP68 5POLI/4VIE 5 X 4 MM² CONNECTION BOX IP68 5POLES/4WAYS 5 X 4 MM²
MOR685P/2V	CONNETTORE IP68 5POLI/2VIE 5 X 2.5 MM² CONNECTOR IP68 5POLES/2WAYS 5 X 2.5 MM²	E.TRA.580	LIMITATORE DI SOVRATENSIONE CL I - IP67 SURGE PROTECTOR CL I - IP67


KUBO12-S HP

PROIETTORE ORIENTABILE HP

DRIVER INCORPORATO

ADJUSTABLE FLOODLIGHT HP

BUILT-IN DRIVER

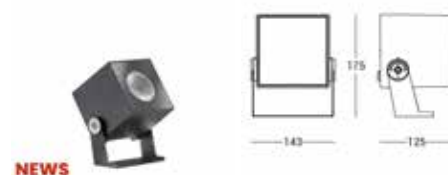

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
2123W/▲C50NB	STRETTO/15° NARROW/15°	20W	2700 lm	1900 lm	220-240Vac 50/60Hz	I	66	07	>80
2123W/▲C50MB	MEDIO/25° MEDIUM/25°	20W	2700 lm	1940 lm	220-240Vac 50/60Hz	I	66	07	>80
2123W/▲C50WB	LARGO/36° WIDE/36°	20W	2700 lm	2000 lm	220-240Vac 50/60Hz	I	66	07	>80

VETRO EXTRACHIARO TRASPARENTE TEMPRATO - EXTRA CLEAR TRANSPARENT TEMPERED GLASS


ON/OFF

ACCESSORI

ACCESSORIES

AC2112	VISIERA ANTIABBAGLIAMENTO PER KUBO12 ANTI-GLARE VISOR FOR KUBO12	MOR685P/3V	CONNETTORE A Y IP68 5POLI/3VIE 5 X 2.5 MM² CONNECTOR Y IP68 5POLES/3WAYS 5 X 2.5 MM²
KIT.036	BRACCIO PER ESTENSIONE A PARETE EXTENSION ARM FOR WALL	MOR685P/3VS	SCATOLA DI CONNESSIONE IP68 5POLI/3VIE 5 X 4 MM² CONNECTION BOX IP68 5POLES/3WAYS 5 X 4 MM²
KIT.032	KIT PICCHETTO PER PROIETTORE FLOODLIGHT SPIKE KIT	MOR685P/4VS	SCATOLA DI CONNESSIONE IP68 5POLI/4VIE 5 X 4 MM² CONNECTION BOX IP68 5POLES/4WAYS 5 X 4 MM²
MOR683P/2V	CONNETTORE IP68 3POLI/2VIE 3 X 2.5 MM² CONNECTOR IP68 3POLES/2WAYS 3 X 2.5 MM²	E.TRA.580	LIMITATORE DI SOVRATENSIONE CL I - IP67 SURGE PROTECTOR CL I - IP67

PROIETTORE ORIENTABILE HP DALI
DRIVER INCORPORATO
ADJUSTABLE FLOODLIGHT HP DALI
BUILT-IN DRIVER

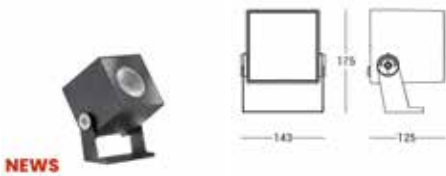

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
2123W/▲D50NB	 STRETTO/15° NARROW/15°	20W	2700 lm	1900 lm	220-240Vac 50/60Hz	I	66	07	>80
2123W/▲D50MB	 MEDIO/25° MEDIUM/25°	20W	2700 lm	1940 lm	220-240Vac 50/60Hz	I	66	07	>80
2123W/▲D50WB	 LARGO/36° WIDE/36°	20W	2700 lm	2000 lm	220-240Vac 50/60Hz	I	66	07	>80

VETRO EXTRACHIARO TRASPARENTE TEMPRATO - EXTRA CLEAR TRANSPARENT TEMPERED GLASS
DALI-2 INTEGRATO - DALI-2 INTEGRATED

ACCESSORI
ACCESSORIES

AC2112	VISIERA ANTIABBAGLIAMENTO PER KUBO12 ANTI-GLARE VISOR FOR KUBO12	MOR685P/3V	CONNETTORE A Y IP68 5POLI/3VIE 5 X 2.5 MM² CONNECTOR Y IP68 5POLES/3WAYS 5 X 2.5 MM²
KIT.036	BRACCIO PER ESTENSIONE A PARETE EXTENSION ARM FOR WALL	MOR685P/3VS	SCATOLA DI CONNESSIONE IP68 5POLI/3VIE 5 X 4 MM² CONNECTION BOX IP68 5POLES/3WAYS 5 X 4 MM²
KIT.032	KIT PICCHETTO PER PROIETTORE FLOODLIGHT SPIKE KIT	MOR685P/4VS	SCATOLA DI CONNESSIONE IP68 5POLI/4VIE 5 X 4 MM² CONNECTION BOX IP68 5POLES/4WAYS 5 X 4 MM²
MOR685P/2V	CONNETTORE IP68 5POLI/2VIE 5 X 2.5 MM² CONNECTOR IP68 5POLES/2WAYS 5 X 2.5 MM²	E.TRA.580	LIMITATORE DI SOVRATENSIONE CL I - IP67 SURGE PROTECTOR CL I - IP67

KUBO12-S RGBW


RGBW

PROIETTORE ORIENTABILE RGBW

24VDC

ADJUSTABLE FLOODLIGHT RGBW

24VDC



CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
2113W/RCRCNB	STRETTO/10° NARROW/10°	12W with Algorithm	1650 lm	1420 lm	24Vdc	III	66	07	RGBW
2113W/RCRCMB	MEDIO/20° MEDIUM/20°	12W with Algorithm	1650 lm	1420 lm	24Vdc	III	66	07	RGBW
2113W/RCRCWB	LARGO/30° WIDE/30°	12W with Algorithm	1650 lm	1420 lm	24Vdc	III	66	07	RGBW
2113W/RCRCSW	MOLTO LARGO/60° SUPER WIDE/60°	12W with Algorithm	1650 lm	1420 lm	24Vdc	III	66	07	RGBW

VETRO EXTRACHIARO TRASPARENTE TEMPRATO - EXTRA CLEAR TRANSPARENT TEMPERED GLASS

DIMMERABILE - DIMMABLE

ACCESSORI

ACCESSORIES

AC2112	VISIERA ANTIABBAGLIAMENTO PER KUBO12 ANTI-GLARE VISOR FOR KUBO12	E.TRA.579 1 DRIVER FOR 1-4 LAMPS	ALIMENTATORE ON/OFF 100W 24VDC IP67 DRIVER ON/OFF 100W 24VDC IP67
KIT.036	BRACCIO PER ESTENSIONE A PARETE EXTENSION ARM FOR WALL	E.TRA.592 1 DRIVER FOR 5-9 LAMPS	ALIMENTATORE ON/OFF ELG 240W 24VDC IP67 DRIVER ON/OFF ELG 240W 24VDC IP67
MOR685P/2V	CONNETTORE IP68 5POLI/2VIE 5 X 2.5 MM² CONNECTOR IP68 5POLES/2WAYS 5 X 2.5 MM²	E.CNT.001	TASTIERA RGBW 16DMX CH.12-24VDC RGBW CONTROLLER 16DMX CH.12-24VDC
MOR685P/3V	CONNETTORE A Y IP68 5POLI/3VIE 5 X 2.5 MM² CONNECTOR Y IP68 5POLES/3WAYS 5 X 2.5 MM²	E.CNT.002	TASTIERA RGBW 1024DMX CH.5-15VDC RGBW CONTROLLER 1024DMX CH.5-15VDC
MOR685P/3VS	SCATOLA DI CONNESSIONE IP68 5POLI/3VIE 5 X 4 MM² CONNECTION BOX IP68 5POLES/3WAYS 5 X 4 MM²	E.TRA.594	SPLITTER DMX-RDM 2 CANALI SPLITTER DMX-RDM 2 CHANNELS
MOR685P/4VS	SCATOLA DI CONNESSIONE IP68 5POLI/4VIE 5 X 4 MM² CONNECTION BOX IP68 5POLES/4WAYS 5 X 4 MM²		

ACCESSORI

ACCESSORIES

CONNETTORI

CONNECTORS



MOR685P/2V

Connettore IP68 5Poli/2Vie 5 x 2.5 mm²
Connector IP68 5Poles/2Ways 5 x 2.5 mm²
 L 109 x Ø 31



MOR685P/3V

Connettore a Y IP68 5Poli/3Vie 5 x 2.5 mm²
Connector Y IP68 5Poles/3Ways 5 x 2.5 mm²
 L 140 x W 72 x H 33



MOR685P/3VS

Scatola di connessione IP68 5Poli/3Vie 5 x 4 mm²
Connection Box IP68 5Poles/3Ways 5 x 4 mm²
 L 127 x W 93 x H 35



MOR685P/4VS

Scatola di connessione IP68 5Poli/4Vie 5 x 4 mm²
Connection Box IP68 5Poles/4Ways 5 x 4 mm²
 L 113 x W 93 x H 35

FISSAGGIO

FIXING



KIT.036

Braccio per estensione a parete
Extension arm for wall
 L 500

VISIERE

VISORS



AC2112

Visiera antiabbagliamento per Kubo12
Anti-glare visor for Kubo12
 L 125 x H 125

ALIMENTATORI 24Vdc

DRIVER 24Vdc



E.TRA.579

1 Driver for 1-4 Lamps

Alimentatore ON/OFF 100W 24Vdc IP67
Driver ON/OFF 100W 24Vdc IP67
 L 140 x W 63 x H 32



E.TRA.592

1 Driver for 5-9 Lamps

Alimentatore ON/OFF ELG 240W 24Vdc IP67
Driver ON/OFF ELG 240W 24Vdc IP67
 L 244 x W 71 x H 38

CENTRALINE RGBW

RGBW CONTROL UNITS



E.TRA.594

Splitter DMX-RDM 2 Canali
Splitter DMX-RDM 2 Channels
 L 88 x W 54 x H 26

CONTROLLER TOUCH

TOUCH CONTROLLER


E.CNT.001

Tastiera RGBW 16DMX Ch. 12-24Vdc

RGBW Controller 16DMX Ch. 12-24Vdc

L 75 x W 29.5 x H 120


E.CNT.002

Tastiera RGBW 1024DMX Ch. 5-15Vdc

RGBW Controller 1024DMX Ch. 5-15Vdc

L 146 x W 10 x H 106

