



MATRIX

Apparecchi da incasso per illuminazione lineare
Linear recessed lights

DESCRIZIONE DESCRIPTION

Apparecchio da incasso a pavimento lineare. Le diverse lunghezze e le molteplici ottiche consentono una vasta gamma di possibilità di progettazione. Questa versione di Matrix è particolarmente adatta all'illuminazione radente su facciate di edifici, per risaltarne la consistenza materica, o per accentuare i dettagli architettonici di un edificio. Disponibile anche la versione RGBW.

Recessed linear floor luminaire. The different lengths and multiple optics allow a wide range of design possibilities. This version of Matrix is particularly suitable for shimmering lighting on building facades, to highlight the textural consistency, or to accentuate architectural details of a building. Also available RGBW version.

INSTALLAZIONE INSTALLATION

Incasso a terra

Ground recessed

CORPO BODY

Alluminio estruso

Extruded aluminum

BOX BOX

Lamiera di acciaio inox AISI430F

Stainless steel sheet AISI430F

SCHERMO SCREEN

Vetro extrachiario temprato 8 mm

Extra clear tempered glass 8 mm

VITERIA SCREWS

Acciaio inox A2

Stainless steel A2



RGBW











**CONFIG.
CODICE**
CODE
CONFIG.

▲ → **H=2700K
W=3000K
N=4000K**

ALIMENTAZIONE
INPUT SUPPLY

220-240VAC 50/60HZ
220-240VAC 50/60HZ



IP 67


IK 09



MATRIX RECESSED

INCASSO LINEARE CON LENTI L. 340

LINEAR RECESSED WITH LENS L. 340

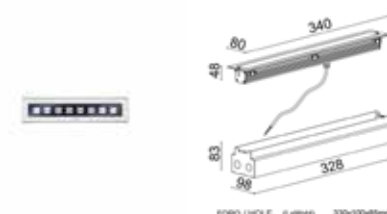

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
2800R/▲P50.NB99	 STRETTO/12° NARROW/12°	14W	1452 lm	1220 lm	220-240Vac 50/60Hz	I	67	09	80
2800R/▲P50.MB99	 MEDIO/28° MEDIUM/28°	14W	1452 lm	1220 lm	220-240Vac 50/60Hz	I	67	09	80
2800R/▲P50.WB99	 LARGO/50° WIDE/50°	14W	1452 lm	1220 lm	220-240Vac 50/60Hz	I	67	09	80
2800R/▲P50.OB99	 OVALE/42°X12° OVAL/42°X12°	14W	1452 lm	1220 lm	220-240Vac 50/60Hz	I	67	09	80
2800R/▲P50.AB99	 ASIMMETRICO ASYMMETRIC	14W	1452 lm	1220 lm	220-240Vac 50/60Hz	I	67	09	80


VETRO EXTRACHIARO TRASPARENTE TEMPRATO 8 MM - EXTRA CLEAR TRANSPARENT TEMPERED GLASS 8 MM

ON/OFF

CALPESTATBILE 500 KG - WALKABLE 500KG

INCASSO LINEARE EMISSIONE DIFFUSA L. 340

LINEAR RECESSED DIFFUSE EMISSION L. 340

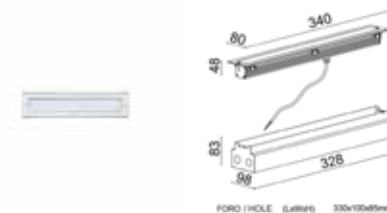

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
2800R/▲R50VS.99	 DIFFUSO DIFFUSED	8W	870 lm	339 lm	220-240Vac 50/60Hz	I	67	09	80

VETRO EXTRACHIARO OPALE TEMPRATO 8 MM - EXTRA CLEAR OPAL TEMPERED GLASS 8 MM


ON/OFF

CALPESTATBILE 500 KG - WALKABLE 500KG

ACCESSORI

ACCESSORIES

MOR683P/2V	CONNETTORE IP68 3POLI/2VIE 3 X 2.5 MM² CONNECTOR IP68 3POLES/2WAYS 3 X 2.5 MM²	E.TRA.580	LIMITATORE DI SOVRATENSIONE CL I - IP67 SURGE PROTECTOR CL I - IP67
------------	---	-----------	--

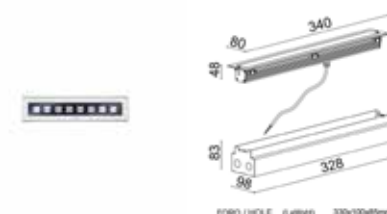
INCASSO LINEARE DALI CON LENTI L. 340**LINEAR RECESSED DALI WITH LENS L. 340**

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
2800R/▲D50.NB99	STRETTO/12° NARROW/12°	14W	1452 lm	1220 lm	220-240Vac 50/60Hz	I	67	09	80
2800R/▲D50.MB99	MEDIO/28° MEDIUM/28°	14W	1452 lm	1220 lm	220-240Vac 50/60Hz	I	67	09	80
2800R/▲D50.WB99	LARGO/50° WIDE/50°	14W	1452 lm	1220 lm	220-240Vac 50/60Hz	I	67	09	80
2800R/▲D50.OB99	OVALE/42°X12° OVAL/42°X12°	14W	1452 lm	1220 lm	220-240Vac 50/60Hz	I	67	09	80
2800R/▲D50.AB99	ASIMMETRICO ASYMMETRIC	14W	1452 lm	1220 lm	220-240Vac 50/60Hz	I	67	09	80

VETRO EXTRACHIARO TRASPARENTE TEMPRATO 8 MM - EXTRA CLEAR TRANSPARENT TEMPERED GLASS 8 MM

DALI-2 INTEGRATO - DALI-2 INTEGRATED

CALPESTATBILE 500 KG - WALKABLE 500KG

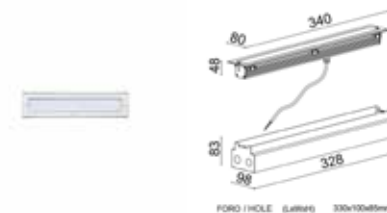INCASSO LINEARE DALI EMISSIONE DIFFUSA L. 340**LINEAR RECESSED DALI DIFFUSE EMISSION L. 340**

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
2800R/▲D50VS.99	DIFFUSO DIFFUSED	8W	870 lm	339 lm	220-240Vac 50/60Hz	I	67	09	80


VETRO EXTRACHIARO OPALE TEMPRATO 8 MM - EXTRA CLEAR OPAL TEMPERED GLASS 8 MM

DALI-2 INTEGRATO - DALI-2 INTEGRATED

CALPESTATBILE 500 KG - WALKABLE 500KG

ACCESSORI**ACCESSORIES**

MOR685P/2V	CONNETTORE IP68 5POLI/2VIE 5 X 2.5 MM² CONNECTOR IP68 5POLES/2WAYS 5 X 2.5 MM²	E.TRA.580	LIMITATORE DI SOVRATENSIONE CL I - IP67 SURGE PROTECTOR CL I - IP67
------------	---	-----------	--

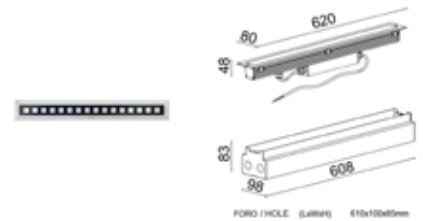
INCASSO LINEARE CON LENTI L. 620**LINEAR RECESSED WITH LENS L. 620**

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
2801R/▲P50.NB99	 STRETTO/12° NARROW/12°	26W	2905 lm	2440 lm	220-240Vac 50/60Hz	I	67	09	80
2801R/▲P50.MB99	 MEDIO/28° MEDIUM/28°	26W	2905 lm	2440 lm	220-240Vac 50/60Hz	I	67	09	80
2801R/▲P50.WB99	 LARGO/50° WIDE/50°	26W	2905 lm	2440 lm	220-240Vac 50/60Hz	I	67	09	80
2801R/▲P50.OB99	 OVALE/42°X12° OVAL/42°X12°	26W	2905 lm	2440 lm	220-240Vac 50/60Hz	I	67	09	80
2801R/▲P50.AB99	 ASIMMETRICO ASYMMETRIC	26W	2905 lm	2440 lm	220-240Vac 50/60Hz	I	67	09	80

VETRO EXTRACHIARO TRASPARENTE TEMPRATO 8 MM - EXTRA CLEAR TRANSPARENT TEMPERED GLASS 8 MM

ON/OFF

CALPESTATBILE 500 KG - WALKABLE 500KG

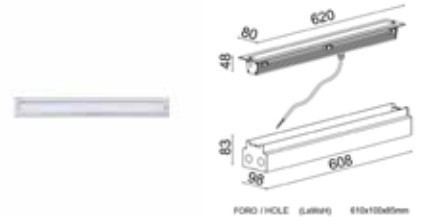INCASSO LINEARE EMISSIONE DIFFUSA L. 620**LINEAR RECESSED DIFFUSE EMISSION L. 620**

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
2801R/▲R50VS.99	 DIFFUSO DIFFUSED	13W	1740 lm	678 lm	220-240Vac 50/60Hz	I	67	09	80


VETRO EXTRACHIARO OPALE TEMPRATO 8 MM - EXTRA CLEAR OPAL TEMPERED GLASS 8 MM

ON/OFF

CALPESTATBILE 500 KG - WALKABLE 500KG

ACCESSORI**ACCESSORIES**

MOR683P/2V	CONNETTORE IP68 3POLI/2VIE 3 X 2.5 MM² CONNECTOR IP68 3POLES/2WAYS 3 X 2.5 MM²	E.TRA.580	LIMITATORE DI SOVRATENSIONE CL I - IP67 SURGE PROTECTOR CL I - IP67
MOR685P/3V	CONNETTORE A Y IP68 5POLI/3VIE 5 X 2.5 MM² CONNECTOR Y IP68 5POLES/3WAYS 5 X 2.5 MM²		

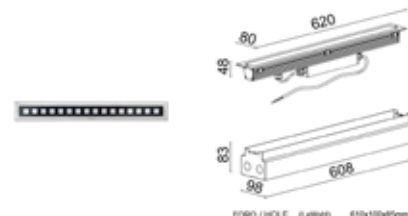
INCASSO LINEARE DALI CON LENTI L. 620**LINEAR RECESSED DALI WITH LENS L. 620**

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
2801R/▲D50.NB99	 STRETTO/12° NARROW/12°	26W	2905 lm	2440 lm	220-240Vac 50/60Hz	I	67	09	80
2801R/▲D50.MB99	 MEDIO/28° MEDIUM/28°	26W	2905 lm	2440 lm	220-240Vac 50/60Hz	I	67	09	80
2801R/▲D50.WB99	 LARGO/50° WIDE/50°	26W	2905 lm	2440 lm	220-240Vac 50/60Hz	I	67	09	80
2801R/▲D50.OB99	 OVALE/42°X12° OVAL/42°X12°	26W	2905 lm	2440 lm	220-240Vac 50/60Hz	I	67	09	80
2801R/▲D50.AB99	 ASIMMETRICO ASYMMETRIC	26W	2905 lm	2440 lm	220-240Vac 50/60Hz	I	67	09	80

VETRO EXTRACHIARO TRASPARENTE TEMPRATO 8 MM - EXTRA CLEAR TRANSPARENT TEMPERED GLASS 8 MM

DALI-2 INTEGRATO - DALI-2 INTEGRATED

CALPESTATBILE 500 KG - WALKABLE 500KG

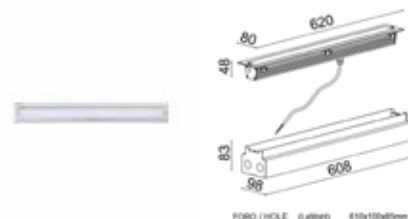INCASSO LINEARE DALI EMISSIONE DIFFUSA L. 620**LINEAR RECESSED DALI DIFFUSE EMISSION L. 620**

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
2801R/▲D50VS.99	 DIFFUSO DIFFUSED	13W	1740 lm	678 lm	220-240Vac 50/60Hz	I	67	09	80


VETRO EXTRACHIARO OPALE TEMPRATO 8 MM - EXTRA CLEAR OPAL TEMPERED GLASS 8 MM

DALI-2 INTEGRATO - DALI-2 INTEGRATED

CALPESTATBILE 500 KG - WALKABLE 500KG

ACCESSORI**ACCESSORIES**

MOR685P/2V	CONNETTORE IP68 5POLI/2VIE 5 X 2.5 MM² CONNECTOR IP68 5POLES/2WAYS 5 X 2.5 MM²	E.TRA.580	LIMITATORE DI SOVRATENSIONE CL I - IP67 SURGE PROTECTOR CL I - IP67
MOR685P/3V	CONNETTORE A Y IP68 5POLI/3VIE 5 X 2.5 MM² CONNECTOR Y IP68 5POLES/3WAYS 5 X 2.5 MM²		

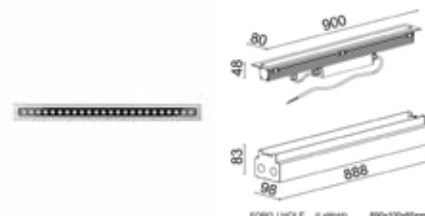
INCASSO LINEARE CON LENTI L. 900**LINEAR RECESSED WITH LENS L. 900**

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
2802R/▲P50.NB99	 STRETTO/12° NARROW/12°	42W	4357 lm	3660 lm	220-240Vac 50/60Hz	I	67	09	80
2802R/▲P50.MB99	 MEDIO/28° MEDIUM/28°	42W	4357 lm	3660 lm	220-240Vac 50/60Hz	I	67	09	80
2802R/▲P50.WB99	 LARGO/50° WIDE/50°	42W	4357 lm	3660 lm	220-240Vac 50/60Hz	I	67	09	80
2802R/▲P50.OB99	 OVALE/42°X12° OVAL/42°X12°	42W	4357 lm	3660 lm	220-240Vac 50/60Hz	I	67	09	80
2802R/▲P50.AB99	 ASIMMETRICO ASYMMETRIC	42W	4357 lm	3660 lm	220-240Vac 50/60Hz	I	67	09	80

VETRO EXTRACHIARO TRASPARENTE TEMPRATO 8 MM - EXTRA CLEAR TRANSPARENT TEMPERED GLASS 8 MM

ON/OFF

CALPESTATBILE 500 KG - WALKABLE 500KG

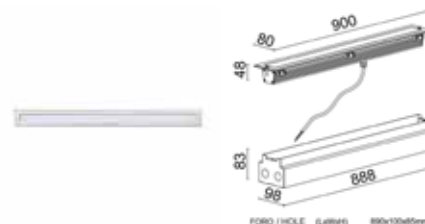INCASSO LINEARE EMISSIONE DIFFUSA L. 900**LINEAR RECESSED DIFFUSE EMISSION L. 900**

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
2802R/▲R50VS.99	 DIFFUSO DIFFUSED	19W	2610 lm	1020 lm	220-240Vac 50/60Hz	I	67	09	80

VETRO EXTRACHIARO OPALE TEMPRATO 8 MM - EXTRA CLEAR OPAL TEMPERED GLASS 8 MM

ON/OFF


CALPESTATBILE 500 KG - WALKABLE 500KG

ACCESSORI**ACCESSORIES**

MOR683P/2V	CONNETTORE IP68 3POLI/2VIE 3 X 2.5 MM² CONNECTOR IP68 3POLES/2WAYS 3 X 2.5 MM²	E.TRA.580	LIMITATORE DI SOVRATENSIONE CL I - IP67 SURGE PROTECTOR CL I - IP67
MOR685P/3V	CONNETTORE A Y IP68 5POLI/3VIE 5 X 2.5 MM² CONNECTOR Y IP68 5POLES/3WAYS 5 X 2.5 MM²		

INCASSO LINEARE DALI CON LENTI L. 900

LINEAR RECESSED DALI WITH LENS L. 900

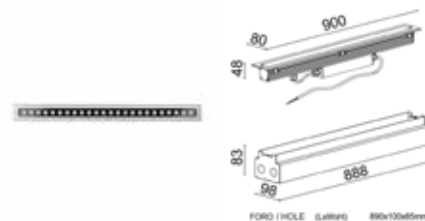

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
2802R/▲D50.NB99	 STRETTO/12° NARROW/12°	42W	4357 lm	3660 lm	220-240Vac 50/60Hz	I	67	09	80
2802R/▲D50.MB99	 MEDIO/28° MEDIUM/28°	42W	4357 lm	3660 lm	220-240Vac 50/60Hz	I	67	09	80
2802R/▲D50.WB99	 LARGO/50° WIDE/50°	42W	4357 lm	3660 lm	220-240Vac 50/60Hz	I	67	09	80
2802R/▲D50.OB99	 OVALE/42°X12° OVAL/42°X12°	42W	4357 lm	3660 lm	220-240Vac 50/60Hz	I	67	09	80
2802R/▲D50.AB99	 ASIMMETRICO ASYMMETRIC	42W	4357 lm	3660 lm	220-240Vac 50/60Hz	I	67	09	80


VETRO EXTRACHIARO TRASPARENTE TEMPRATO 8 MM - EXTRA CLEAR TRANSPARENT TEMPERED GLASS 8 MM

DALI-2 INTEGRATO - DALI-2 INTEGRATED

CALPESTATBILE 500 KG - WALKABLE 500KG

INCASSO LINEARE DALI EMISSIONE DIFFUSA L. 900

LINEAR RECESSED DALI DIFFUSE EMISSION L. 900

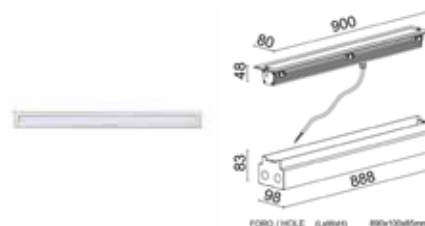

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
2802R/▲D50VS.99	 DIFFUSO DIFFUSED	19W	2610 lm	1020 lm	220-240Vac 50/60Hz	I	67	09	80

VETRO EXTRACHIARO OPALE TEMPRATO 8 MM - EXTRA CLEAR OPAL TEMPERED GLASS 8 MM


DALI-2 INTEGRATO - DALI-2 INTEGRATED

CALPESTATBILE 500 KG - WALKABLE 500KG

ACCESSORI

ACCESSORIES

MOR685P/2V	CONNETTORE IP68 5POLI/2VIE 5 X 2.5 MM² CONNECTOR IP68 5POLES/2WAYS 5 X 2.5 MM²	E.TRA.580	LIMITATORE DI SOVRATENSIONE CL I - IP67 SURGE PROTECTOR CL I - IP67
MOR685P/3V	CONNETTORE A Y IP68 5POLI/3VIE 5 X 2.5 MM² CONNECTOR Y IP68 5POLES/3WAYS 5 X 2.5 MM²		

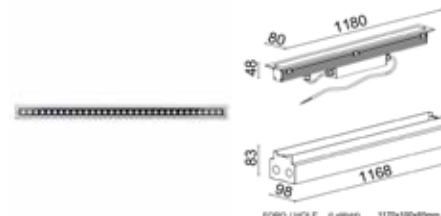
INCASSO LINEARE CON LENTI L. 1180**LINEAR RECESSED WITH LENS L. 1180**

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
2803R/▲P50.NB99	 STRETTO/12° NARROW/12°	54W	5810 lm	4880 lm	220-240Vac 50/60Hz	I	67	09	80
2803R/▲P50.MB99	 MEDIO/28° MEDIUM/28°	54W	5810 lm	4880 lm	220-240Vac 50/60Hz	I	67	09	80
2803R/▲P50.WB99	 LARGO/50° WIDE/50°	54W	5810 lm	4880 lm	220-240Vac 50/60Hz	I	67	09	80
2803R/▲P50.OB99	 OVALE/42°X12° OVAL/42°X12°	54W	5810 lm	4880 lm	220-240Vac 50/60Hz	I	67	09	80
2803R/▲P50.AB99	 ASIMMETRICO ASYMMETRIC	54W	5810 lm	4880 lm	220-240Vac 50/60Hz	I	67	09	80

VETRO EXTRACHIARO TRASPARENTE TEMPRATO 8 MM - EXTRA CLEAR TRANSPARENT TEMPERED GLASS 8 MM

ON/OFF

CALPESTATBILE 500 KG - WALKABLE 500KG

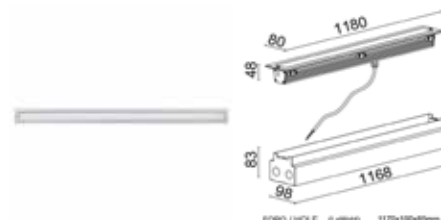INCASSO LINEARE EMISSIONE DIFFUSA L. 1180**LINEAR RECESSED DIFFUSE EMISSION L. 1180**

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
2803R/▲R50VS.99	 DIFFUSO DIFFUSED	26W	3480 lm	1355 lm	220-240Vac 50/60Hz	I	67	09	80


VETRO EXTRACHIARO OPALE TEMPRATO 8 MM - EXTRA CLEAR OPAL TEMPERED GLASS 8 MM

ON/OFF

CALPESTATBILE 500 KG - WALKABLE 500KG

ACCESSORI**ACCESSORIES**

MOR683P/2V	CONNETTORE IP68 3POLI/2VIE 3 X 2.5 MM² CONNECTOR IP68 3POLES/2WAYS 3 X 2.5 MM²	E.TRA.580	LIMITATORE DI SOVRATENSIONE CL I - IP67 SURGE PROTECTOR CL I - IP67
MOR685P/3V	CONNETTORE A Y IP68 5POLI/3VIE 5 X 2.5 MM² CONNECTOR Y IP68 5POLES/3WAYS 5 X 2.5 MM²		

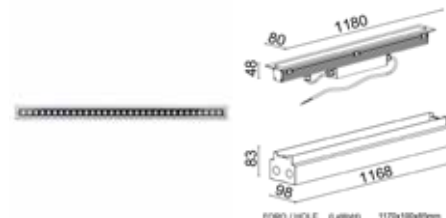
INCASSO LINEARE DALI CON LENTI L. 1180**LINEAR RECESSED DALI WITH LENS L. 1180**

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
2803R/▲D50.NB99	 STRETTO/12° NARROW/12°	54W	5810 lm	4880 lm	220-240Vac 50/60Hz	I	67	09	80
2803R/▲D50.MB99	 MEDIO/28° MEDIUM/28°	54W	5810 lm	4880 lm	220-240Vac 50/60Hz	I	67	09	80
2803R/▲D50.WB99	 LARGO/50° WIDE/50°	54W	5810 lm	4880 lm	220-240Vac 50/60Hz	I	67	09	80
2803R/▲D50.OB99	 OVALE/42°X12° OVAL/42°X12°	54W	5810 lm	4880 lm	220-240Vac 50/60Hz	I	67	09	80
2803R/▲D50.AB99	 ASIMMETRICO ASYMMETRIC	54W	5810 lm	4880 lm	220-240Vac 50/60Hz	I	67	09	80

VETRO EXTRACHIARO TRASPARENTE TEMPRATO 8 MM - EXTRA CLEAR TRANSPARENT TEMPERED GLASS 8 MM

DALI-2 INTEGRATO - DALI-2 INTEGRATED

CALPESTATBILE 500 KG - WALKABLE 500KG

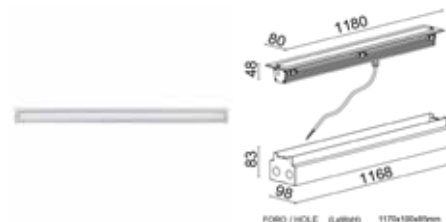INCASSO LINEARE DALI EMISSIONE DIFFUSA L. 1180**LINEAR RECESSED DALI DIFFUSE EMISSION L. 1180**

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
2803R/▲D50VS.99	 DIFFUSO DIFFUSED	26W	3480 lm	1355 lm	220-240Vac 50/60Hz	I	67	09	80

VETRO EXTRACHIARO OPALE TEMPRATO 8 MM - EXTRA CLEAR OPAL TEMPERED GLASS 8 MM

DALI-2 INTEGRATO - DALI-2 INTEGRATED

CALPESTATBILE 500 KG - WALKABLE 500KG

ACCESSORI**ACCESSORIES**


MOR685P/2V	CONNETTORE IP68 5POLI/2VIE 5 X 2.5 MM² CONNECTOR IP68 5POLES/2WAYS 5 X 2.5 MM²	E.TRA.580	LIMITATORE DI SOVRATENSIONE CL I - IP67 SURGE PROTECTOR CL I - IP67
MOR685P/3V	CONNETTORE A Y IP68 5POLI/3VIE 5 X 2.5 MM² CONNECTOR Y IP68 5POLES/3WAYS 5 X 2.5 MM²		

MATRIX RECESSED RGBW

INCASSO LINEARE RGBW L. 340

LINEAR RECESSED RGBW L. 340

RGBW



FORO / HOLE (LxH) 83x105x5mm

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
2800R/RCRC.MB99	MEDIO/24° MEDIUM/24°	12W with Algorithm	1650 lm	1420 lm	24Vdc	III	67	09	RGBW
2800R/RCRC.O499	OVALE/40°X20° OVAL/40°X20°	12W with Algorithm	1650 lm	1420 lm	24Vdc	III	67	09	RGBW
2800R/RCRC.WB99	LARGO/35° WIDE/35°	12W with Algorithm	1650 lm	1420 lm	24Vdc	III	67	09	RGBW
2800R/RCRC.SW99	MOLTO LARGO/54° SUPER WIDE/54°	12W with Algorithm	1650 lm	1420 lm	24Vdc	III	67	09	RGBW

VETRO EXTRACHIARO TRASPARENTE TEMPRATO 8 MM - EXTRA CLEAR TRANSPARENT TEMPERED GLASS 8 MM


DIMMERABILE - DIMMABLE

CALPESTATBILE 500 KG - WALKABLE 500KG

INCASSO LINEARE RGBW L. 620

LINEAR RECESSED RGBW L. 620

RGBW



FORO / HOLE (LxH) 83x105x5mm

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
2801R/RCRC.MB99	MEDIO/24° MEDIUM/24°	24W with Algorithm	3300 lm	2840 lm	24Vdc	III	67	09	RGBW
2801R/RCRC.O499	OVALE/40°X20° OVAL/40°X20°	24W with Algorithm	3300 lm	2840 lm	24Vdc	III	67	09	RGBW
2801R/RCRC.WB99	LARGO/35° WIDE/35°	24W with Algorithm	3300 lm	2840 lm	24Vdc	III	67	09	RGBW
2801R/RCRC.SW99	MOLTO LARGO/54° SUPER WIDE/54°	24W with Algorithm	3300 lm	2840 lm	24Vdc	III	67	09	RGBW

VETRO EXTRACHIARO TRASPARENTE TEMPRATO 8 MM - EXTRA CLEAR TRANSPARENT TEMPERED GLASS 8 MM

DIMMERABILE - DIMMABLE

CALPESTATBILE 500 KG - WALKABLE 500KG


ACCESSORI

ACCESSORIES

MOR685P/2V	CONNETTORE IP68 5POLI/2VIE 5 X 2.5 MM² CONNECTOR IP68 5POLES/2WAYS 5 X 2.5 MM²	E.CNT.001	TASTIERA RGBW 16DMX CH.12-24VDC RGBW CONTROLLER 16DMX CH.12-24VDC
MOR685P/3V	CONNETTORE A Y IP68 5POLI/3VIE 5 X 2.5 MM² CONNECTOR Y IP68 5POLES/3WAYS 5 X 2.5 MM²	E.CNT.002	TASTIERA RGBW 1024DMX CH. 5-15VDC RGBW CONTROLLER 1024DMX CH. 5-15VDC
E.TRA.579	ALIMENTATORE ON/OFF 100W 24VDC IP67 DRIVER ON/OFF 100W 24VDC IP67	E.TRA.594	SPLITTER DMX-RDM 2 CANALI SPLITTER DMX-RDM 2 CHANNELS
E.TRA.592	ALIMENTATORE ON/OFF ELG 240W 24VDC IP67 DRIVER ON/OFF ELG 240W 24VDC IP67		

INCASSO LINEARE RGBW L. 900**LINEAR RECESSED RGBW L. 900**

RGBW

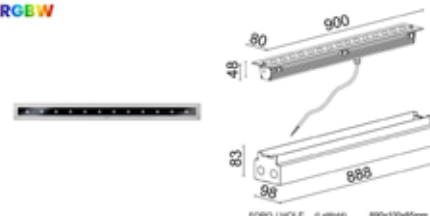

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
2802R/RCRC.MB99	MEDIO/24° MEDIUM/24°	36W with Algorithm	4950 lm	4260 lm	24Vdc	III	67	09	RGBW
2802R/RCRC.O499	OVALE/40°X20° OVAL/40°X20°	36W with Algorithm	4950 lm	4260 lm	24Vdc	III	67	09	RGBW
2802R/RCRC.WB99	LARGO/35° WIDE/35°	36W with Algorithm	4950 lm	4260 lm	24Vdc	III	67	09	RGBW
2802R/RCRC.SW99	MOLTO LARGO/54° SUPER WIDE/54°	36W with Algorithm	4950 lm	4260 lm	24Vdc	III	67	09	RGBW


VETRO EXTRACHIARO TRASPARENTE TEMPRATO 8 MM - EXTRA CLEAR TRANSPARENT TEMPERED GLASS 8 MM

DIMMERABILE - DIMMABLE

CALPESTATBILE 500 KG - WALKABLE 500KG

INCASSO LINEARE RGBW L. 1180**LINEAR RECESSED RGBW L. 1180**

RGBW

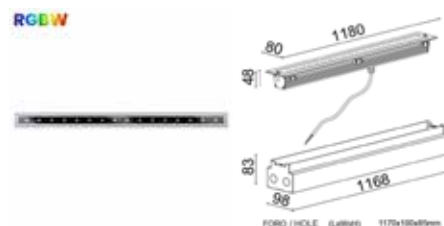

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
2803R/RCRC.MB99	MEDIO/24° MEDIUM/24°	48W with Algorithm	6600 lm	5680 lm	24Vdc	III	67	09	RGBW
2803R/RCRC.O499	OVALE/40°X20° OVAL/40°X20°	48W with Algorithm	6600 lm	5680 lm	24Vdc	III	67	09	RGBW
2803R/RCRC.WB99	LARGO/35° WIDE/35°	48W with Algorithm	6600 lm	5680 lm	24Vdc	III	67	09	RGBW
2803R/RCRC.SW99	MOLTO LARGO/54° SUPER WIDE/54°	48W with Algorithm	6600 lm	5680 lm	24Vdc	III	67	09	RGBW

VETRO EXTRACHIARO TRASPARENTE TEMPRATO 8 MM - EXTRA CLEAR TRANSPARENT TEMPERED GLASS 8 MM

DIMMERABILE - DIMMABLE

CALPESTATBILE 500 KG - WALKABLE 500KG

ACCESSORI**ACCESSORIES**

MOR685P/2V	CONNETTORE IP68 5POLI/2VIE 5 X 2.5 MM² CONNECTOR IP68 5POLES/2WAYS 5 X 2.5 MM²	E.CNT.001	TASTIERA RGBW 16DMX CH. 12-24VDC RGBW CONTROLLER 16DMX CH. 12-24VDC
MOR685P/3V	CONNETTORE A Y IP68 5POLI/3VIE 5 X 2.5 MM² CONNECTOR Y IP68 5POLES/3WAYS 5 X 2.5 MM²	E.CNT.002	TASTIERA RGBW 1024DMX CH. 5-15VDC RGBW CONTROLLER 1024DMX CH. 5-15VDC
E.TRA.579	ALIMENTATORE ON/OFF 100W 24VDC IP67 DRIVER ON/OFF 100W 24VDC IP67	E.TRA.594	SPLITTER DMX-RDM 2 CANALI SPLITTER DMX-RDM 2 CHANNELS
E.TRA.592	ALIMENTATORE ON/OFF ELG 240W 24VDC IP67 DRIVER ON/OFF ELG 240W 24VDC IP67		

ACCESSORI

ACCESSORIES

CONNETTORI

CONNECTORS



MOR685P/2V

Connettore IP68 5Poli/2Vie 5 x 2.5 mm²
Connector IP68 5Poles/2Ways 5 x 2.5 mm²
 L 109 x Ø 31



MOR685P/3V

Connettore a Y IP68 5Poli/3Vie 5 x 2.5 mm²
Connector Y IP68 5Poles/3Ways 5 x 2.5 mm²
 L 140 x W 72 x H 33

ALIMENTATORI 24Vdc

DRIVER 24Vdc



E.TRA.579

Cod. 2800R - 1 Driver for 1-4 Lamps
 Cod. 2801R - 1 Driver for 1-2 Lamps
 Cod. 2802R - 1 Driver for 1 Lamp
 Cod. 2803R - 1 Driver for 1 Lamp

Alimentatore ON/OFF 100W 24Vdc IP67

Driver ON/OFF 100W 24Vdc IP67

L 140 x W 63 x H 32



E.TRA.592

Cod. 2800R - 1 Driver for 5-9 Lamps
 Cod. 2801R - 1 Driver for 3-5 Lamps
 Cod. 2802R - 1 Driver for 2-3 Lamps
 Cod. 2803R - 1 Driver for 1 Lamps

Alimentatore ON/OFF ELG 240W 24Vdc IP67

Driver ON/OFF ELG 240W 24Vdc IP67

L 244 x W 71 x H 38

CENTRALINE RGBW

RGBW CONTROL UNITS



E.TRA.594

Splitter DMX-RDM 2 Canali

Splitter DMX-RDM 2 Channels

L 88 x W 54 x H 26

CONTROLLER TOUCH

TOUCH CONTROLLER



E.CNT.001

Tastiera RGBW 16DMX Ch. 12-24Vdc

RGBW Controller 16DMX Ch. 12-24Vdc

L 75 x W 29.5 x H 120



E.CNT.002

Tastiera RGBW 1024DMX Ch. 5-15Vdc

RGBW Controller 1024DMX Ch. 5-15Vdc

L 146 x W 10 x H 106

