



CUT 70

Incassato per effetti di luce Ø70
Recessed for light effects Ø70

DESCRIZIONE DESCRIPTION

Cut è la nuova linea di segnapasso a luce radente nata per creare suggestivi effetti di luce ed ombra. Ideale per dare vita a percorsi luminosi residenziali o pubblici, Cut trova facile collocazione anche a parete o soffitto, rendendosi quasi invisibile ma facendo in modo che la luce e l'atmosfera create siano le protagoniste della scena. Proposto ad una, due o quattro fessure, Cut diventa l'apparecchio ideale per effetti morbidi o d'accento, per installazioni singole o in serie. Il grado di protezione IP67 ed il sistema AcquaStop per la protezione anti-condensa, infine, rendono Cut un prodotto affidabile e sicuro, ideale per suscitare emozioni di luce.

Cut is the new line of steplight born to create suggestive light and shadow effects. Ideal for creating residential or public lighting paths, Cut is easily placed on the wall or ceiling, making it almost invisible but ensuring that the light and atmosphere created are the protagonists of the scene. Offered with one, two or four slots, Cut becomes the ideal device for soft effects or accents, for single installations or in series. The IP67 protection rating and the AcquaStop system for anti-condensation protection make Cut a reliable and safe product, ideal to arouse emotions of light.

INSTALLAZIONE INSTALLATION

Incasso a terra o parete

Ground or wall recessed

CORPO BODY

Alluminio da tornitura Serie 6000 anticorodal, per maggiore resistenza alla corrosione

Anticorodal turning aluminum 6000 Series, for greater corrosion resistance

BOX BOX

Polipropilene (PP) 30% fibra stabilizzata UV GWT750

Polypropylene (PP) 30% fiber UV stabilized GWT750

SCHERMO SCREEN

Policarbonato trasparente

Transparent polycarbonate

GUARNIZIONI SEALS



EPDM

EPDM

VERNICIATURA FINISHING

Polvere poliestere stabilizzata ai raggi UV con trattamento anticorrosione

Anti-corrosive UV stabilized polyester powder





1 FINESTRA
1 WINDOW

4070R/WRRC1L

WATTAGGIO / WATTAGE **6W**

INTERASSE APPARECCHI /
DISTANCE BETWEEN FIXTURES **2M**



2 FINESTRE
2 WINDOWS

4070R/WRRC2L

WATTAGGIO / WATTAGE **6W**

INTERASSE APPARECCHI /
DISTANCE BETWEEN FIXTURES **2M**



4 FINESTRA
4 WINDOWS

4070R/WRRC4L

WATTAGGIO / WATTAGE **6W**

INTERASSE APPARECCHI /
DISTANCE BETWEEN FIXTURES **2M**



**CONFIG.
CODICE**
CODE
CONFIG.


▲ → **H=2700K**
W=3000K
N=4000K


**VERSIONE IN
TENSIONE**
CONSTANT
VOLTAGE

6W CON DRIVER REMOTO 24Vdc
6W REMOTE DRIVER 24Vdc

**VERSIONE IN
CORRENTE**
CONSTANT
CURRENT


6W CON DRIVER REMOTO MAX 500mA DC
6W REMOTE DRIVER MAX 500mA DC

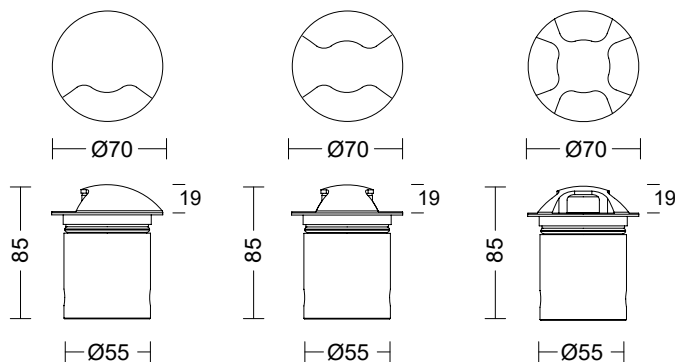

INCASSO 1 FINESTRA Ø70**24VDC***RECESSED 1 WINDOW Ø70***24VDC**


CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
4070R/▲RRC1L	DIFFUSO/1 FINESTRA DIFFUSED/1 WINDOW	6W	690 lm	41 lm	24Vdc	III	67	08	80

POLICARBONATO TRASPARENTE - TRANSPARENT POLYCARBONATE
ON/OFF

INCASSO 2 FINESTRE Ø70**24VDC***RECESSED 2 WINDOWS Ø70***24VDC**

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
4070R/▲RRC2L	DIFFUSO/2 FINESTRE DIFFUSED/2 WINDOWS	6W	690 lm	77 lm	24Vdc	III	67	08	80

POLICARBONATO TRASPARENTE - TRANSPARENT POLYCARBONATE
ON/OFF


INCASSO 4 FINESTRE Ø70**24VDC***RECESSED 4 WINDOWS Ø70***24VDC**

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
4070R/▲RRC4L	DIFFUSO/4 FINESTRE DIFFUSED/4 WINDOWS	6W	690 lm	81 lm	24Vdc	III	67	08	80

POLICARBONATO TRASPARENTE - TRANSPARENT POLYCARBONATE
ON/OFF

ACCESSORI*ACCESSORIES*


A.BOX.019.01	CASSAFORMA INTERRATA IN POLIPROPILENE PER RIM/CUT 70 INGROUND POLYPROPYLENE FORMWORK FOR RIM/CUT 70	E.TRA.632 1 DRIVER FOR 1-8 LAMPS	ALIMENTATORE ON/OFF 70W 24VDC IP20 DRIVER ON/OFF 70W 24VDC IP20
D.BOX.033.01	CASSAFORMA CORTA IN ALLUMINIO PER RIM/CUT 70 SHORT ALUMINUM FORMWORK FOR RIM/CUT 70	E.TRA.577 1 DRIVER FOR 1-3 LAMPS	ALIMENTATORE ON/OFF 25W 24VDC IP67 DRIVER ON/OFF 25W 24VDC IP67
MOR682P/2V	CONNETTORE IP68 2POLI/2VIE 2 X 1 MM² CONNECTOR IP68 2POLES/2WAYS 2 X 1 MM²	E.TRA.579 1 DRIVER FOR 4-12 LAMPS	ALIMENTATORE ON/OFF 100W 24VDC IP67 DRIVER ON/OFF 100W 24VDC IP67
E.TRA.631 1 DRIVER FOR 1-2 LAMPS	ALIMENTATORE ON/OFF 15W 24VDC IP20 DRIVER ON/OFF 15W 24VDC IP20	HUB.24V.001.ND 1 HUB FOR 1-8 LAMPS	HUB 70W 24VDC IP66 ON/OFF HUB 70W 24VDC IP66 ON/OFF

INCASSO 1 FINESTRA Ø70**MAX 500MA***RECESSED 1 WINDOW Ø70***MAX 500MA**

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
4070R/▲RCC1L	 DIFFUSO/1 FINESTRA DIFFUSED/1 WINDOW	6W	690 lm	41 lm	max 500mA	III	67	08	80

POLICARBONATO TRASPARENTE - TRANSPARENT POLYCARBONATE


DIMMERABILE - DIMMABLE

INCASSO 2 FINESTRE Ø70**MAX 500MA***RECESSED 2 WINDOWS Ø70***MAX 500MA**

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
4070R/▲RCC2L	 DIFFUSO/2 FINESTRE DIFFUSED/2 WINDOWS	6W	690 lm	77 lm	max 500mA	III	67	08	80

POLICARBONATO TRASPARENTE - TRANSPARENT POLYCARBONATE

DIMMERABILE - DIMMABLE

INCASSO 4 FINESTRE Ø70**MAX 500MA***RECESSED 4 WINDOWS Ø70***MAX 500MA**

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
4070R/▲RCC4L	 DIFFUSO/4 FINESTRE DIFFUSED/4 WINDOWS	6W	690 lm	81 lm	max 500mA	III	67	08	80

POLICARBONATO TRASPARENTE - TRANSPARENT POLYCARBONATE

DIMMERABILE - DIMMABLE

ACCESSORI*ACCESSORIES*

A.BOX.019.01	CASSAFORMA INTERRATA IN POLIPROPILENE PER RIM/CUT 70 INGROUND POLYPROPYLENE FORMWORK FOR RIM/CUT 70	E.TRA.636.500 1 DRIVER FOR 1-5 LAMPS	ALIMENTATORE CASAMBI 60W 500MA IP20 DRIVER CASAMBI 60W 500MA IP20
D.BOX.033.01	CASSAFORMA CORTA IN ALLUMINIO PER RIM/CUT 70 SHORT ALUMINUM FORMWORK FOR RIM/CUT 70	E.TRA.658.500 1 DRIVER FOR 1-3 LAMPS	ALIMENTATORE ON/OFF 23W 500MA IP67 DRIVER ON/OFF 23W 500MA IP67
MOR682P/2V	CONNETTORE IP68 2POLI/2VIE 2 X 1 MM² CONNECTOR IP68 2POLES/2WAYS 2 X 1 MM²	E.TRA.659.500 1 DRIVER FOR 1-3 LAMPS	ALIMENTATORE DALI2 23W 500MA IP67 DRIVER DALI2 23W 500MA IP67
E.TRA.621.500 1 DRIVER FOR 1-3 LAMPS	ALIMENTATORE ON/OFF 20W 500MA IP20 DRIVER ON/OFF 20W 500MA IP20	HUB.500.001.ND 1 HUB FOR 1-5 LAMPS	HUB 500MA IP66 ON/OFF CON DRIVER 60W IP20 HUB 500MA IP66 ON/OFF WITH DRIVER 60W IP20
E.TRA.623.500 1 DRIVER FOR 1-4 LAMPS	ALIMENTATORE ON/OFF 36W 500MA IP20 DRIVER ON/OFF 36W 500MA IP20	HUB.500.001.DA2 1 HUB FOR 1-5 LAMPS	HUB 500MA IP66 DALI-2 CON DRIVER 60W IP20 HUB 500MA IP66 DALI-2 WITH DRIVER 60W IP20
E.TRA.634.500 1 DRIVER FOR 1-5 LAMPS	ALIMENTATORE ON/OFF 60W 500MA IP20 DRIVER ON/OFF 60W 500MA IP20	HUB.500.001.CA 1 HUB FOR 1-5 LAMPS	HUB 500MA IP66 CASAMBI CON DRIVER 60W IP20 HUB 500MA IP66 CASAMBI WITH DRIVER 60W IP20
E.TRA.635.500 1 DRIVER FOR 1-5 LAMPS	ALIMENTATORE DALI2 60W 500MA IP20 DRIVER DALI2 60W 500MA IP20		

ACCESSORI

ACCESSORIES

BOX DA INCASSO

RECESSED BOXES


A.BOX.019.01

Cassaforma interrata in polipropilene per Rim/Cut 70
Inground polypropylene formwork for Rim/Cut 70
 H 110 x Ø 135


D.BOX.033.01

Cassaforma corta in alluminio per Rim/Cut 70
Short aluminum formwork for Rim/Cut 70
 H 100 x Ø 60

CONNETTORI


CONNECTORS


MOR682P/2V

Connettore IP68 2Poli/2Vie 2 x 1 mm²
Connector IP68 2Poles/2Ways 2 x 1 mm²
 L 72 x Ø 22

ALIMENTATORI 24Vdc

DRIVER 24Vdc

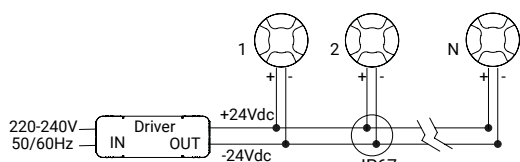

Collegamento in Parallelo
 Parallel Wiring


E.TRA.577

1 Driver for 1-3 Lamps

Alimentatore ON/OFF 25W 24Vdc IP67
Driver ON/OFF 25W 24Vdc IP67
 L 148 x W 40 x H 32


E.TRA.579

1 Driver for 4-12 Lamps

Alimentatore ON/OFF 100W 24Vdc IP67
Driver ON/OFF 100W 24Vdc IP67
 L 140 x W 63 x H 32


E.TRA.631

1 Driver for 1-2 Lamps

Alimentatore ON/OFF 15W 24Vdc IP20
Driver ON/OFF 15W 24Vdc IP20
 L 106 x W 33 x H 22


E.TRA.632

1 Driver for 1-8 Lamps

Alimentatore ON/OFF 70W 24Vdc IP20
Driver ON/OFF 70W 24Vdc IP20
 L 124 x W 80 x H 22


HUB - SISTEMI DI CONNESSIONE SEMPLIFICATA 24Vdc

HUB - READY TO CONNECT SYSTEM 24Vdc


HUB.24V.001.ND


1 Hub for 1-8 Lamps

Hub 70W 24Vdc IP66 ON/OFF
Hub 70W 24Vdc IP66 ON/OFF
 L 235 x W 200 x H 92



ALIMENTATORI CC – 500mA

DRIVER CC – 500mA

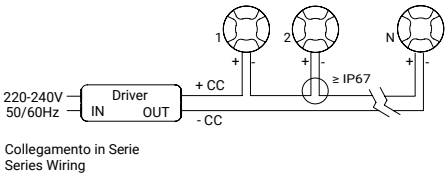

E.TRA.621.500
1 Driver for 1-3 Lamps

Alimentatore ON/OFF 20W 500mA IP20
Driver ON/OFF 20W 500mA IP20
L 111 x W 52 x H 22



E.TRA.623.500
1 Driver for 1-4 Lamps

Alimentatore ON/OFF 36W 500mA IP20
Driver ON/OFF 36W 500mA IP20
L 163 x W 30 x H 21



E.TRA.634.500
1 Driver for 1-5 Lamps

Alimentatore ON/OFF 60W 500mA IP20
Driver ON/OFF 60W 500mA IP20
L 124 x W 80 x H 22



E.TRA.635.500
1 Driver for 1-5 Lamps

Alimentatore DALI2 60W 500mA IP20
Driver DALI2 60W 500mA IP20
L 124 x W 80 x H 22



E.TRA.636.500
1 Driver for 1-5 Lamps

Alimentatore CASAMBI 60W 500mA IP20
Driver CASAMBI 60W 500mA IP20
L 124 x W 80 x H 22



E.TRA.658.500
1 Driver for 1-3 Lamps

Alimentatore ON/OFF 23W 500mA IP67
Driver ON/OFF 23W 500mA IP67
L 124 x W 47 x H 26



E.TRA.659.500
1 Driver for 1-3 Lamps

Alimentatore DALI2 23W 500mA IP67
Driver DALI2 23W 500mA IP67
L 124 x W 47 x H 26

HUB – SISTEMI DI CONNESSIONE SEMPLIFICATA CC 500mA

HUB – READY TO CONNECT SYSTEM CC 500mA



HUB.500.001.CA
1 Hub for 1-5 Lamps

Hub 500mA IP66 CASAMBI con driver 60W IP20
Hub 500mA IP66 CASAMBI with driver 60W IP20
L 235 x W 200 x H 92



HUB.500.001.DA2
1 Hub for 1-5 Lamps

Hub 500mA IP66 DALI-2 con driver 60W IP20
Hub 500mA IP66 DALI-2 with driver 60W IP20
L 235 x W 200 x H 92



HUB.500.001.ND
1 Hub for 1-5 Lamps

Hub 500mA IP66 ON/OFF con driver 60W IP20
Hub 500mA IP66 ON/OFF with driver 60W IP20
L 235 x W 200 x H 92

