



MATRIX

Proiettore orientabile lineare
Adjustable linear floodlight

DESCRIZIONE *DESCRIZIONE*

Apparecchio orientabile lineare, adatto ad essere installato a parete, soffitto o a terra come proiettore stand-alone. Dotato di ottiche secondarie per diverse distribuzioni della luce, questa versione di Matrix è particolarmente adatta all'illuminazione radente su facciate di edifici, per risaltarne la consistenza materica, o per accentuare i dettagli architettonici di un edificio storico. Disponibile anche la versione RGBW.

Adjustable linear floodlight, suitable for wall, ceiling or ground installation as a stand-alone floodlight. Equipped with secondary optics for different types of light distribution, this Matrix version is particularly suited for the oblique illumination of building façades, to highlight their texture or accentuate the architectural details of historical buildings. RGBW version also available.

INSTALLAZIONE *INSTALLATION*

Installazione a terra, parete o soffitto

Ground, wall or ceiling installation

CORPO *BODY*

Alluminio estruso

Extruded aluminium

SCHERMO *SCREEN*

Vetro extrachiario temprato

Extra clear tempered glass

VITERIA *SCREWS*

Acciaio inox A2

Stainless steel A2

VERNICIATURA *FINISHING*

Polvere poliestere stabilizzata ai raggi UV con trattamento anticorrosione

Anti-corrosive UV stabilized polyester powder







CONFIG.
CODICE
CODE
CONFIG.

▲ → H=2700K
W=3000K
N=4000K

ALIMENTAZIONE
INPUT SUPPLY

220-240VAC 50/60HZ
220-240VAC 50/60HZ



45

306



586



866



1146



MATRIX FLOODLIGHT

PROIETTORE LINEARE CON LENTI L. 306

LINEAR FLOODLIGHT WITH LENS L. 306




CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
2800P/▲P50.NB	STRETTO/12° NARROW/12°	14W	1452 lm	1220 lm	220-240Vac 50/60Hz	I	67	07	80
2800P/▲P50.MB	MEDIO/28° MEDIUM/28°	14W	1452 lm	1220 lm	220-240Vac 50/60Hz	I	67	07	80
2800P/▲P50.WB	LARGO/50° WIDE/50°	14W	1452 lm	1220 lm	220-240Vac 50/60Hz	I	67	07	80
2800P/▲P50.OB	OVALE/42°X12° OVAL/42°X12°	14W	1452 lm	1220 lm	220-240Vac 50/60Hz	I	67	07	80

VETRO EXTRACHIARO TRASPARENTE TEMPRATO 5 MM - EXTRA CLEAR TRANSPARENT TEMPERED GLASS 5 MM

ON/OFF

PROIETTORE LINEARE EMISSIONE DIFFUSA L. 306

LINEAR FLOODLIGHT DIFFUSE EMISSION L. 306

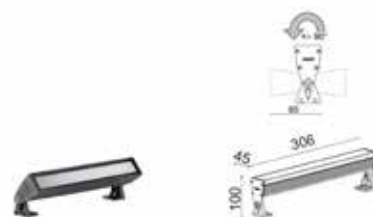

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
2800P/▲R50VS	DIFFUSO DIFFUSED	8W	870 lm	339 lm	220-240Vac 50/60Hz	I	67	07	80


VETRO EXTRACHIARO OPALE TEMPRATO 5 MM - EXTRA CLEAR OPAL TEMPERED GLASS 5 MM

ON/OFF

ACCESSORI

ACCESSORIES


MOR683P/2V	CONNETTORE IP68 3POLI/2VIE 3 X 2.5 MM² CONNECTOR IP68 3POLES/2WAYS 3 X 2.5 MM²	MOR685P/4VS	SCATOLA DI CONNESSIONE IP68 5POLI/4VIE 5 X 4 MM² CONNECTION BOX IP68 5POLES/4WAYS 5 X 4 MM²
MOR685P/3V	CONNETTORE A Y IP68 5POLI/3VIE 5 X 2.5 MM² CONNECTOR Y IP68 5POLES/3WAYS 5 X 2.5 MM²	E.TRA.580	LIMITATORE DI SOVRATENSIONE CL I - IP67 SURGE PROTECTOR CL I - IP67
MOR685P/3VS	SCATOLA DI CONNESSIONE IP68 5POLI/3VIE 5 X 4 MM² CONNECTION BOX IP68 5POLES/3WAYS 5 X 4 MM²		

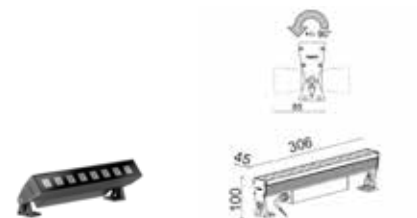PROIETTORE LINEARE DALI CON LENTI L. 306**LINEAR FLOODLIGHT DALI WITH LENS L. 306**

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
2800P/▲D50.NB	STRETTO/12° NARROW/12°	14W	1452 lm	1220 lm	220-240Vac 50/60Hz	I	67	07	80
2800P/▲D50.MB	MEDIO/28° MEDIUM/28°	14W	1452 lm	1220 lm	220-240Vac 50/60Hz	I	67	07	80
2800P/▲D50.WB	LARGO/50° WIDE/50°	14W	1452 lm	1220 lm	220-240Vac 50/60Hz	I	67	07	80
2800P/▲D50.OB	OVALE/42°X12° OVAL/42°X12°	14W	1452 lm	1220 lm	220-240Vac 50/60Hz	I	67	07	80

VETRO EXTRACHIARO TRASPARENTE TEMPRATO 5 MM - EXTRA CLEAR TRANSPARENT TEMPERED GLASS 5 MM

DALI-2 INTEGRATO - DALI-2 INTEGRATED

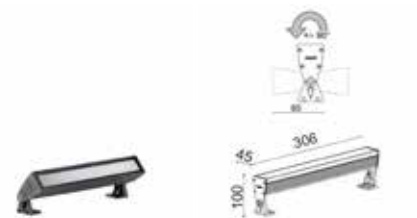PROIETTORE LINEARE DALI EMISSIONE DIFFUSA L. 306**LINEAR FLOODLIGHT DALI DIFFUSE EMISSION L. 306**

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
2800P/▲D50VS	DIFFUSO DIFFUSED	8W	870 lm	339 lm	220-240Vac 50/60Hz	I	67	07	80

VETRO EXTRACHIARO OPALE TEMPRATO 5 MM - EXTRA CLEAR OPAL TEMPERED GLASS 5 MM

DALI-2 INTEGRATO - DALI-2 INTEGRATED

ACCESSORI**ACCESSORIES**

MOR685P/2V	CONNETTORE IP68 5POLI/2VIE 5 X 2.5 MM² CONNECTOR IP68 5POLES/2WAYS 5 X 2.5 MM²	MOR685P/4VS	SCATOLA DI CONNESSIONE IP68 5POLI/4VIE 5 X 4 MM² CONNECTION BOX IP68 5POLES/4WAYS 5 X 4 MM²
MOR685P/3V	CONNETTORE A Y IP68 5POLI/3VIE 5 X 2.5 MM² CONNECTOR Y IP68 5POLES/3WAYS 5 X 2.5 MM²	E.TRA.580	LIMITATORE DI SOVRATENSIONE CL I - IP67 SURGE PROTECTOR CL I - IP67
MOR685P/3VS	SCATOLA DI CONNESSIONE IP68 5POLI/3VIE 5 X 4 MM² CONNECTION BOX IP68 5POLES/3WAYS 5 X 4 MM²		

PROIETTORE LINEARE CON LENTI L. 586

LINEAR FLOODLIGHT WITH LENS L. 586




CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
2801P/▲P50.NB	STRETTO/12° NARROW/12°	26W	2905 lm	2440 lm	220-240Vac 50/60Hz	I	67	07	80
2801P/▲P50.MB	MEDIO/28° MEDIUM/28°	26W	2905 lm	2440 lm	220-240Vac 50/60Hz	I	67	07	80
2801P/▲P50.WB	LARGO/50° WIDE/50°	26W	2905 lm	2440 lm	220-240Vac 50/60Hz	I	67	07	80
2801P/▲P50.OB	OVALE/42°X12° OVAL/42°X12°	26W	2905 lm	2440 lm	220-240Vac 50/60Hz	I	67	07	80

VETRO EXTRACHIARO TRASPARENTE TEMPRATO 5 MM - EXTRA CLEAR TRANSPARENT TEMPERED GLASS 5 MM

ON/OFF

PROIETTORE LINEARE EMISSIONE DIFFUSA L. 586

LINEAR FLOODLIGHT DIFFUSE EMISSION L. 586

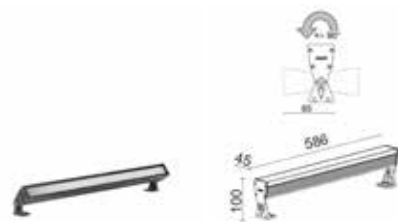

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
2801P/▲R50VS	DIFFUSO DIFFUSED	14W	1740 lm	678 lm	220-240Vac 50/60Hz	I	67	07	80

VETRO EXTRACHIARO OPALE TEMPRATO 5 MM - EXTRA CLEAR OPAL TEMPERED GLASS 5 MM

ON/OFF

ACCESSORI

ACCESSORIES

MOR683P/2V	CONNETTORE IP68 3POLI/2VIE 3 X 2.5 MM² CONNECTOR IP68 3POLES/2WAYS 3 X 2.5 MM²	MOR685P/4VS	SCATOLA DI CONNESSIONE IP68 5POLI/4VIE 5 X 4 MM² CONNECTION BOX IP68 5POLES/4WAYS 5 X 4 MM²
MOR685P/3V	CONNETTORE A Y IP68 5POLI/3VIE 5 X 2.5 MM² CONNECTOR Y IP68 5POLES/3WAYS 5 X 2.5 MM²	E.TRA.580	LIMITATORE DI SOVRATENSIONE CL I - IP67 SURGE PROTECTOR CL I - IP67
MOR685P/3VS	SCATOLA DI CONNESSIONE IP68 5POLI/3VIE 5 X 4 MM² CONNECTION BOX IP68 5POLES/3WAYS 5 X 4 MM²		

PROIETTORE LINEARE DALI CON LENTI L. 586

LINEAR FLOODLIGHT DALI WITH LENS L. 586




CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
2801P/▲D50.NB	STRETTO/12° NARROW/12°	26W	2905 lm	2440 lm	220-240Vac 50/60Hz	I	67	07	80
2801P/▲D50.MB	MEDIO/28° MEDIUM/28°	26W	2905 lm	2440 lm	220-240Vac 50/60Hz	I	67	07	80
2801P/▲D50.WB	LARGO/50° WIDE/50°	26W	2905 lm	2440 lm	220-240Vac 50/60Hz	I	67	07	80
2801P/▲D50.OB	OVALE/42°X12° OVAL/42°X12°	26W	2905 lm	2440 lm	220-240Vac 50/60Hz	I	67	07	80

VETRO EXTRACHIARO TRASPARENTE TEMPRATO 5 MM - EXTRA CLEAR TRANSPARENT TEMPERED GLASS 5 MM

DALI-2 INTEGRATO - DALI-2 INTEGRATED

PROIETTORE LINEARE DALI EMISSIONE DIFFUSA L. 586

LINEAR FLOODLIGHT DALI DIFFUSE EMISSION L. 586

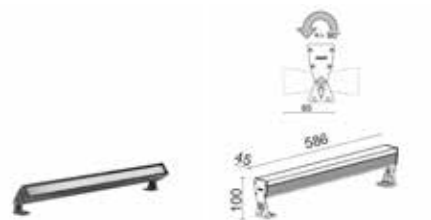

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
2801P/▲D50VS	DIFFUSO DIFFUSED	14W	1740 lm	678 lm	220-240Vac 50/60Hz	I	67	07	80

VETRO EXTRACHIARO OPALE TEMPRATO 5 MM - EXTRA CLEAR OPAL TEMPERED GLASS 5 MM

DALI-2 INTEGRATO - DALI-2 INTEGRATED

ACCESSORI

ACCESSORIES


MOR685P/2V	CONNETTORE IP68 5POLI/2VIE 5 X 2.5 MM² CONNECTOR IP68 5POLES/2WAYS 5 X 2.5 MM²	MOR685P/4VS	SCATOLA DI CONNESSIONE IP68 5POLI/4VIE 5 X 4 MM² CONNECTION BOX IP68 5POLES/4WAYS 5 X 4 MM²
MOR685P/3V	CONNETTORE A Y IP68 5POLI/3VIE 5 X 2.5 MM² CONNECTOR Y IP68 5POLES/3WAYS 5 X 2.5 MM²	E.TRA.580	LIMITATORE DI SOVRATENSIONE CL I - IP67 SURGE PROTECTOR CL I - IP67
MOR685P/3VS	SCATOLA DI CONNESSIONE IP68 5POLI/3VIE 5 X 4 MM² CONNECTION BOX IP68 5POLES/3WAYS 5 X 4 MM²		

PROIETTORE LINEARE CON LENTI L. 866**LINEAR FLOODLIGHT WITH LENS L. 866**

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
2802P/▲P50.NB	STRETTO/12° NARROW/12°	42W	4357 lm	3660 lm	220-240Vac 50/60Hz	I	67	07	80
2802P/▲P50.MB	MEDIO/28° MEDIUM/28°	42W	4357 lm	3660 lm	220-240Vac 50/60Hz	I	67	07	80
2802P/▲P50.WB	LARGO/50° WIDE/50°	42W	4357 lm	3660 lm	220-240Vac 50/60Hz	I	67	07	80
2802P/▲P50.OB	OVALE/42°X12° OVAL/42°X12°	42W	4357 lm	3660 lm	220-240Vac 50/60Hz	I	67	07	80

VETRO EXTRACHIARO TRASPARENTE TEMPRATO 5 MM - EXTRA CLEAR TRANSPARENT TEMPERED GLASS 5 MM

ON/OFF

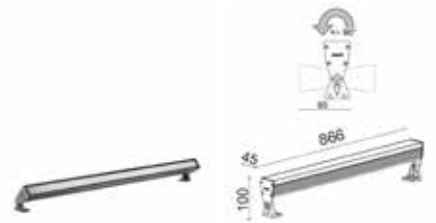PROIETTORE LINEARE EMISSIONE DIFFUSA L. 866**LINEAR FLOODLIGHT DIFFUSE EMISSION L. 866**

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
2802P/▲R50VS	DIFFUSO DIFFUSED	20W	2610 lm	1020 lm	220-240Vac 50/60Hz	I	67	07	80

VETRO EXTRACHIARO OPALE TEMPRATO 5 MM - EXTRA CLEAR OPAL TEMPERED GLASS 5 MM

ON/OFF

ACCESSORI**ACCESSORIES**


MOR683P/2V	CONNETTORE IP68 3POLI/2VIE 3 X 2.5 MM² CONNECTOR IP68 3POLES/2WAYS 3 X 2.5 MM²	MOR685P/4VS	SCATOLA DI CONNESSIONE IP68 5POLI/4VIE 5 X 4 MM² CONNECTION BOX IP68 5POLES/4WAYS 5 X 4 MM²
MOR685P/3V	CONNETTORE A Y IP68 5POLI/3VIE 5 X 2.5 MM² CONNECTOR Y IP68 5POLES/3WAYS 5 X 2.5 MM²	E.TRA.580	LIMITATORE DI SOVRATENSIONE CL I - IP67 SURGE PROTECTOR CL I - IP67
MOR685P/3VS	SCATOLA DI CONNESSIONE IP68 5POLI/3VIE 5 X 4 MM² CONNECTION BOX IP68 5POLES/3WAYS 5 X 4 MM²		

PROIETTORE LINEARE DALI CON LENTI L. 866**LINEAR FLOODLIGHT DALI WITH LENS L. 866**

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
2802P/▲D50.NB	STRETTO/12° NARROW/12°	42W	4357 lm	3660 lm	220-240Vac 50/60Hz	I	67	07	80
2802P/▲D50.MB	MEDIO/28° MEDIUM/28°	42W	4357 lm	3660 lm	220-240Vac 50/60Hz	I	67	07	80
2802P/▲D50.WB	LARGO/50° WIDE/50°	42W	4357 lm	3660 lm	220-240Vac 50/60Hz	I	67	07	80
2802P/▲D50.OB	OVALE/42°X12° OVAL/42°X12°	42W	4357 lm	3660 lm	220-240Vac 50/60Hz	I	67	07	80

VETRO EXTRACHIARO TRASPARENTE TEMPRATO 5 MM - EXTRA CLEAR TRANSPARENT TEMPERED GLASS 5 MM

DALI-2 INTEGRATO - DALI-2 INTEGRATED

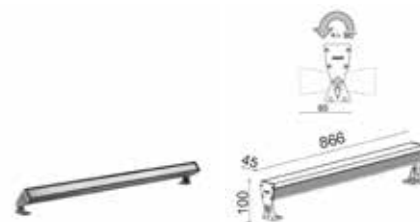PROIETTORE LINEARE DALI EMISSIONE DIFFUSA L. 866**LINEAR FLOODLIGHT DALI DIFFUSE EMISSION L. 866**

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
2802P/▲D50VS	DIFFUSO DIFFUSED	20W	2610 lm	1020 lm	220-240Vac 50/60Hz	I	67	07	80

VETRO EXTRACHIARO OPALE TEMPRATO 5 MM - EXTRA CLEAR OPAL TEMPERED GLASS 5 MM

DALI-2 INTEGRATO - DALI-2 INTEGRATED

ACCESSORI**ACCESSORIES**

MOR685P/2V	CONNETTORE IP68 5POLI/2VIE 5 X 2.5 MM² CONNECTOR IP68 5POLES/2WAYS 5 X 2.5 MM²	MOR685P/4VS	SCATOLA DI CONNESSIONE IP68 5POLI/4VIE 5 X 4 MM² CONNECTION BOX IP68 5POLES/4WAYS 5 X 4 MM²
MOR685P/3V	CONNETTORE A Y IP68 5POLI/3VIE 5 X 2.5 MM² CONNECTOR Y IP68 5POLES/3WAYS 5 X 2.5 MM²	E.TRA.580	LIMITATORE DI SOVRATENSIONE CL I - IP67 SURGE PROTECTOR CL I - IP67
MOR685P/3VS	SCATOLA DI CONNESSIONE IP68 5POLI/3VIE 5 X 4 MM² CONNECTION BOX IP68 5POLES/3WAYS 5 X 4 MM²		

PROIETTORE LINEARE CON LENTI L. 1146

LINEAR FLOODLIGHT WITH LENS L. 1146




CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
2803P/▲P50.NB	 STRETTO/12° NARROW/12°	54W	5810 lm	4880 lm	220-240Vac 50/60Hz	I	67	07	80
2803P/▲P50.MB	 MEDIO/28° MEDIUM/28°	54W	5810 lm	4880 lm	220-240Vac 50/60Hz	I	67	07	80
2803P/▲P50.WB	 LARGO/50° WIDE/50°	54W	5810 lm	4880 lm	220-240Vac 50/60Hz	I	67	07	80
2803P/▲P50.OB	 OVALE/42°X12° OVAL/42°X12°	54W	5810 lm	4880 lm	220-240Vac 50/60Hz	I	67	07	80

VETRO EXTRACHIARO TRASPARENTE TEMPRATO 5 MM - EXTRA CLEAR TRANSPARENT TEMPERED GLASS 5 MM

ON/OFF

PROIETTORE LINEARE EMISSIONE DIFFUSA L. 1146

LINEAR FLOODLIGHT DIFFUSE EMISSION L. 1146

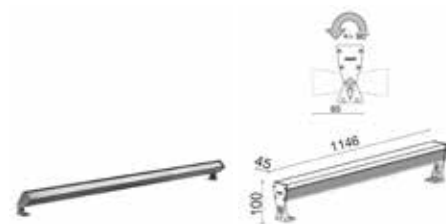

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
2803P/▲R50VS	 DIFFUSO DIFFUSED	26W	3480 lm	1355 lm	220-240Vac 50/60Hz	I	67	07	80

VETRO EXTRACHIARO OPALE TEMPRATO 5 MM - EXTRA CLEAR OPAL TEMPERED GLASS 5 MM

ON/OFF


ACCESSORI

ACCESSORIES

MOR683P/2V	CONNETTORE IP68 3POLI/2VIE 3 X 2.5 MM² CONNECTOR IP68 3POLES/2WAYS 3 X 2.5 MM²	MOR685P/4VS	SCATOLA DI CONNESSIONE IP68 5POLI/4VIE 5 X 4 MM² CONNECTION BOX IP68 5POLES/4WAYS 5 X 4 MM²
MOR685P/3V	CONNETTORE A Y IP68 5POLI/3VIE 5 X 2.5 MM² CONNECTOR Y IP68 5POLES/3WAYS 5 X 2.5 MM²	E.TRA.580	LIMITATORE DI SOVRATENSIONE CL I - IP67 SURGE PROTECTOR CL I - IP67
MOR685P/3VS	SCATOLA DI CONNESSIONE IP68 5POLI/3VIE 5 X 4 MM² CONNECTION BOX IP68 5POLES/3WAYS 5 X 4 MM²		

PROIETTORE LINEARE DALI CON LENTI L. 1146

LINEAR FLOODLIGHT DALI WITH LENS L. 1146

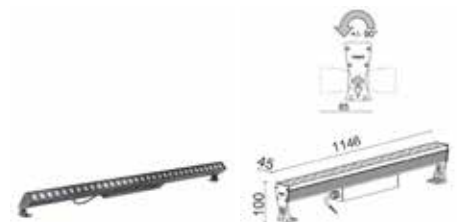


CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
2803P/▲D50.NB	STRETTO/12° NARROW/12°	54W	5810 lm	4880 lm	220-240Vac 50/60Hz	I	67	07	80
2803P/▲D50.MB	MEDIO/28° MEDIUM/28°	54W	5810 lm	4880 lm	220-240Vac 50/60Hz	I	67	07	80
2803P/▲D50.WB	LARGO/50° WIDE/50°	54W	5810 lm	4880 lm	220-240Vac 50/60Hz	I	67	07	80
2803P/▲D50.OB	OVALE/42°X12° OVAL/42°X12°	54W	5810 lm	4880 lm	220-240Vac 50/60Hz	I	67	07	80

VETRO EXTRACHIARO TRASPARENTE TEMPRATO 5 MM - EXTRA CLEAR TRANSPARENT TEMPERED GLASS 5 MM

DALI-2 INTEGRATO - DALI-2 INTEGRATED

PROIETTORE LINEARE DALI EMISSIONE DIFFUSA L. 1146

LINEAR FLOODLIGHT DALI DIFFUSE EMISSION L. 1146

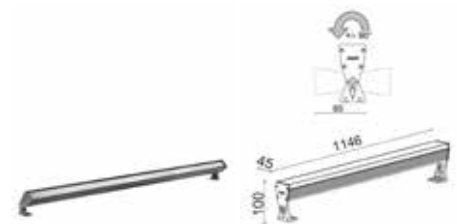

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
2803P/▲D50VS	DIFFUSO DIFFUSED	26W	3480 lm	1355 lm	220-240Vac 50/60Hz	I	67	07	80

VETRO EXTRACHIARO OPALE TEMPRATO 5 MM - EXTRA CLEAR OPAL TEMPERED GLASS 5 MM

DALI-2 INTEGRATO - DALI-2 INTEGRATED

ACCESSORI

ACCESSORIES

MOR685P/2V	CONNETTORE IP68 5POLI/2VIE 5 X 2.5 MM² CONNECTOR IP68 5POLES/2WAYS 5 X 2.5 MM²	MOR685P/4VS	SCATOLA DI CONNESSIONE IP68 5POLI/4VIE 5 X 4 MM² CONNECTION BOX IP68 5POLES/4WAYS 5 X 4 MM²
MOR685P/3V	CONNETTORE A Y IP68 5POLI/3VIE 5 X 2.5 MM² CONNECTOR Y IP68 5POLES/3WAYS 5 X 2.5 MM²	E.TRA.580	LIMITATORE DI SOVRATENSIONE CL I - IP67 SURGE PROTECTOR CL I - IP67
MOR685P/3VS	SCATOLA DI CONNESSIONE IP68 5POLI/3VIE 5 X 4 MM² CONNECTION BOX IP68 5POLES/3WAYS 5 X 4 MM²		

MATRIX FLOODLIGHT RGBW

PROIETTORE LINEARE RGBW L. 306

LINEAR FLOODLIGHT RGBW L. 306

RGBW



CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
2800P/RCRC.MB	 MEDIO/24° MEDIUM/24°	12W with Algorithm	1650 lm	1420 lm	24Vdc	III	67	07	RGBW
2800P/RCRC.WB	 LARGO/35° WIDE/35°	12W with Algorithm	1650 lm	1420 lm	24Vdc	III	67	07	RGBW
2800P/RCRC.SW	 MOLTO LARGO/54° SUPER WIDE/54°	12W with Algorithm	1650 lm	1420 lm	24Vdc	III	67	07	RGBW
2800P/RCRC.O4	 OVALE/40°X20° OVAL/40°X20°	12W with Algorithm	1650 lm	1420 lm	24Vdc	III	67	07	RGBW

VETRO EXTRACHIARO TRASPARENTE TEMPRATO - EXTRA CLEAR TRANSPARENT TEMPERED GLASS

DIMMERABILE - DIMMABLE

PROIETTORE LINEARE RGBW L. 586

LINEAR FLOODLIGHT RGBW L. 586

RGBW



CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
2801P/RCRC.MB	 MEDIO/24° MEDIUM/24°	24W with Algorithm	3300 lm	2840 lm	24Vdc	III	67	07	RGBW
2801P/RCRC.WB	 LARGO/35° WIDE/35°	24W with Algorithm	3300 lm	2840 lm	24Vdc	III	67	07	RGBW
2801P/RCRC.SW	 MOLTO LARGO/54° SUPER WIDE/54°	24W with Algorithm	3300 lm	2840 lm	24Vdc	III	67	07	RGBW
2801P/RCRC.O4	 OVALE/40°X20° OVAL/40°X20°	24W with Algorithm	3300 lm	2840 lm	24Vdc	III	67	07	RGBW

VETRO EXTRACHIARO TRASPARENTE TEMPRATO - EXTRA CLEAR TRANSPARENT TEMPERED GLASS

DIMMERABILE - DIMMABLE

ACCESSORI


ACCESSORIES

MOR685P/2V	CONNETTORE IP68 5POLI/2VIE 5 X 2.5 MM² CONNECTOR IP68 5POLES/2WAYS 5 X 2.5 MM²	E.TRA.592	ALIMENTATORE ON/OFF ELG 240W 24VDC IP67 DRIVER ON/OFF ELG 240W 24VDC IP67
MOR685P/3V	CONNETTORE A Y IP68 5POLI/3VIE 5 X 2.5 MM² CONNECTOR Y IP68 5POLES/3WAYS 5 X 2.5 MM²	E.CNT.001	TASTIERA RGBW 16DMX CH.12-24VDC RGBW CONTROLLER 16DMX CH.12-24VDC
MOR685P/3VS	SCATOLA DI CONNESSIONE IP68 5POLI/3VIE 5 X 4 MM² CONNECTION BOX IP68 5POLES/3WAYS 5 X 4 MM²	E.CNT.002	TASTIERA RGBW 1024DMX CH. 5-15VDC RGBW CONTROLLER 1024DMX CH. 5-15VDC
MOR685P/4VS	SCATOLA DI CONNESSIONE IP68 5POLI/4VIE 5 X 4 MM² CONNECTION BOX IP68 5POLES/4WAYS 5 X 4 MM²	E.TRA.594	SPLITTER DMX-RDM 2 CANALI SPLITTER DMX-RDM 2 CHANNELS
E.TRA.579	ALIMENTATORE ON/OFF 100W 24VDC IP67 DRIVER ON/OFF 100W 24VDC IP67		

PROIETTORE LINEARE RGBW L. 866

LINEAR FLOODLIGHT RGBW L. 866

RGBW



CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
2802P/RCRC.MB	MEDIO/24° MEDIUM/24°	36W with Algorithm	4950 lm	4260 lm	24Vdc	III	67	07	RGBW
2802P/RCRC.WB	LARGO/35° WIDE/35°	36W with Algorithm	4950 lm	4260 lm	24Vdc	III	67	07	RGBW
2802P/RCRC.SW	MOLTO LARGO/54° SUPER WIDE/54°	36W with Algorithm	4950 lm	4260 lm	24Vdc	III	67	07	RGBW
2802P/RCRC.O4	OVALE/40°X20° OVAL/40°X20°	36W with Algorithm	4950 lm	4260 lm	24Vdc	III	67	07	RGBW


VETRO EXTRACHIARO TRASPARENTE TEMPRATO - EXTRA CLEAR TRANSPARENT TEMPERED GLASS

DIMMERABILE - DIMMABLE

PROIETTORE LINEARE RGBW L.1146

LINEAR FLOODLIGHT RGBW L.1146

RGBW



CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
2803P/RCRC.MB	MEDIO/24° MEDIUM/24°	48W with Algorithm	6600 lm	5680 lm	24Vdc	III	67	07	RGBW
2803P/RCRC.WB	LARGO/35° WIDE/35°	48W with Algorithm	6600 lm	5680 lm	24Vdc	III	67	07	RGBW
2803P/RCRC.SW	MOLTO LARGO/54° SUPER WIDE/54°	48W with Algorithm	6600 lm	5680 lm	24Vdc	III	67	07	RGBW
2803P/RCRC.O4	OVALE/40°X20° OVAL/40°X20°	48W with Algorithm	6600 lm	5680 lm	24Vdc	III	67	07	RGBW

VETRO EXTRACHIARO TRASPARENTE TEMPRATO - EXTRA CLEAR TRANSPARENT TEMPERED GLASS

DIMMERABILE - DIMMABLE

ACCESSORI

ACCESSORIES

MOR685P/2V	CONNETTORE IP68 5POLI/2VIE 5 X 2.5 MM² CONNECTOR IP68 5POLES/2WAYS 5 X 2.5 MM²	E.TRA.592	ALIMENTATORE ON/OFF ELG 240W 24VDC IP67 DRIVER ON/OFF ELG 240W 24VDC IP67
MOR685P/3V	CONNETTORE A Y IP68 5POLI/3VIE 5 X 2.5 MM² CONNECTOR Y IP68 5POLES/3WAYS 5 X 2.5 MM²	E.CNT.001	TASTIERA RGBW 16DMX CH. 12-24VDC RGBW CONTROLLER 16DMX CH. 12-24VDC
MOR685P/3VS	SCATOLA DI CONNESSIONE IP68 5POLI/3VIE 5 X 4 MM² CONNECTION BOX IP68 5POLES/3WAYS 5 X 4 MM²	E.CNT.002	TASTIERA RGBW 1024DMX CH. 5-15VDC RGBW CONTROLLER 1024DMX CH. 5-15VDC
MOR685P/4VS	SCATOLA DI CONNESSIONE IP68 5POLI/4VIE 5 X 4 MM² CONNECTION BOX IP68 5POLES/4WAYS 5 X 4 MM²	E.TRA.594	SPLITTER DMX-RDM 2 CANALI SPLITTER DMX-RDM 2 CHANNELS
E.TRA.579	ALIMENTATORE ON/OFF 100W 24VDC IP67 DRIVER ON/OFF 100W 24VDC IP67		

ACCESSORI

ACCESSORIES

CONNETTORI

CONNECTORS



MOR685P/2V

Connettore IP68 5Poli/2Vie 5 x 2.5 mm²
Connector IP68 5Poles/2Ways 5 x 2.5 mm²
 L 109 x Ø 31



MOR685P/3V

Connettore a Y IP68 5Poli/3Vie 5 x 2.5 mm²
Connector Y IP68 5Poles/3Ways 5 x 2.5 mm²
 L 140 x W 72 x H 33



MOR685P/3VS

Scatola di connessione IP68 5Poli/3Vie 5 x 4 mm²
Connection Box IP68 5Poles/3Ways 5 x 4 mm²
 L 127 x W 93 x H 35



MOR685P/4VS

Scatola di connessione IP68 5Poli/4Vie 5 x 4 mm²
Connection Box IP68 5Poles/4Ways 5 x 4 mm²
 L 113 x W 93 x H 35

ALIMENTATORI 24Vdc

DRIVER 24Vdc



E.TRA.579

Cod. 2800P - 1 Driver for 1-4 Lamps
 Cod. 2801P - 1 Driver for 1-2 Lamps
 Cod. 2802P - 1 Driver for 1 Lamp
 Cod. 2803P - 1 Driver for 1 Lamp

Alimentatore ON/OFF 100W 24Vdc IP67
Driver ON/OFF 100W 24Vdc IP67
 L 140 x W 63 x H 32



E.TRA.592

Cod. 2800P - 1 Driver for 5-9 Lamps
 Cod. 2801P - 1 Driver for 3-5 Lamps
 Cod. 2802P - 1 Driver for 2-3 Lamps
 Cod. 2803P - 1 Driver for 1 Lamp

Alimentatore ON/OFF ELG 240W 24Vdc IP67
Driver ON/OFF ELG 240W 24Vdc IP67
 L 244 x W 71 x H 38

CENTRALINE RGBW

RGBW CONTROL UNITS



E.TRA.594

Splitter DMX-RDM 2 Canali
Splitter DMX-RDM 2 Channels
 L 88 x W 54 x H 26

CONTROLLER TOUCH

TOUCH CONTROLLER



E.CNT.001

Tastiera RGBW 16DMX Ch. 12-24Vdc
RGBW Controller 16DMX Ch. 12-24Vdc
 L 75 x W 29.5 x H 120



E.CNT.002

Tastiera RGBW 1024DMX Ch. 5-15Vdc
RGBW Controller 1024DMX Ch. 5-15Vdc
 L 146 x W 10 x H 106

