



KUBO6

Proiettore orientabile
Adjustable floodlight

DESCRIZIONE *DESCRIZIONE*

Proiettore orientabile compatto. Adatto per l'installazione a parete, a soffitto e a terra, disponibile anche versione con picchetto per la sola installazione a terra. Dotato di ottica secondaria per diverse distribuzioni di luce e con un'ampia scelta di accessori utili per il controllo del flusso luminoso e del comfort visivo.

Compact adjustable floodlight. Suitable for wall, ceiling and floor installation, also available spike version for ground installation only. Equipped with secondary optics for different light distributions and with a wide selection of accessories useful for controlling the luminous flux and visual comfort.

INSTALLAZIONE *INSTALLATION*

Installazione a terra, parete o soffitto

Ground, wall or ceiling installation

CORPO *BODY*

Alluminio pressofuso

Die-cast aluminium

SCHERMO *SCREEN*

Vetro extrachiario trasparente temprato

Extra clear transparent tempered glass

GUARNIZIONI *SEALS*

EPDM

EPDM

VITERIA *SCREWS*

Acciaio inox A2

Stainless steel A2

VERNICIATURA *FINISHING*

Polvere poliestere stabilizzata ai raggi UV con trattamento anticorrosione

Anti-corrosive UV stabilized polyester powder







**CONFIG.
CODICE**
CODE
CONFIG.


▲ → **H=2700K**
W=3000K
N=4000K

**VERSIONE IN
TENSIONE**
CONSTANT
VOLTAGE


8W CON DRIVER REMOTO 24Vdc
8W REMOTE DRIVER 24Vdc

**VERSIONE
220-240V**
220-240V
VERSION

ALIMENTAZIONE DIRETTA
DIRECT AC



— 69 —



— 67 —




KUBO6-S

PROIETTORE ORIENTABILE

24VDC

ADJUSTABLE FLOODLIGHT

24VDC



CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
2107W/▲CRCNB	 STRETTO/10° NARROW/10°	8W	860 lm	720 lm	24Vdc	III	66	07	>80
2107W/▲CRCMB	 MEDIO/26° MEDIUM/26°	8W	860 lm	720 lm	24Vdc	III	66	07	>80
2107W/▲CRCWB	 LARGO/56° WIDE/56°	8W	860 lm	720 lm	24Vdc	III	66	07	>80

VETRO EXTRACHIARO TRASPARENTE TEMPRATO - EXTRA CLEAR TRANSPARENT TEMPERED GLASS


ON/OFF

ACCESSORI

ACCESSORIES

KIT.022	KIT PICCHETTO PER PROIETTORE FLOODLIGHT SPIKE KIT	E.TRA.631 1 DRIVER FOR 1-2 LAMPS	ALIMENTATORE ON/OFF 15W 24VDC IP20 DRIVER ON/OFF 15W 24VDC IP20
AC2106	VISIERA ANTIABBAGLIAMENTO PER KUBO6 ANTI-GLARE VISOR FOR KUBO6	E.TRA.632 1 DRIVER FOR 1-10 LAMPS	ALIMENTATORE ON/OFF 70W 24VDC IP20 DRIVER ON/OFF 70W 24VDC IP20
KIT.036	BRACCIO PER ESTENSIONE A PARETE EXTENSION ARM FOR WALL	E.TRA.577 1 DRIVER FOR 1-3 LAMPS	ALIMENTATORE ON/OFF 25W 24VDC IP67 DRIVER ON/OFF 25W 24VDC IP67
MOR682P/2V	CONNETTORE IP68 2POLI/2VIE 2 X 1 MM² CONNECTOR IP68 2POLES/2WAYS 2 X 1 MM²	E.TRA.579 1 DRIVER FOR 4-14 LAMPS	ALIMENTATORE ON/OFF 100W 24VDC IP67 DRIVER ON/OFF 100W 24VDC IP67
MOR685P/3VS	SCATOLA DI CONNESSIONE IP68 5POLI/3VIE 5 X 4 MM² CONNECTION BOX IP68 5POLES/3WAYS 5 X 4 MM²	HUB.24V.001.ND 1 HUB FOR 1-8 LAMPS	HUB 70W 24VDC IP66 ON/OFF HUB 70W 24VDC IP66 ON/OFF
MOR685P/4VS	SCATOLA DI CONNESSIONE IP68 5POLI/4VIE 5 X 4 MM² CONNECTION BOX IP68 5POLES/4WAYS 5 X 4 MM²		

PROIETTORE ORIENTABILE
LED DIRECT AC
ADJUSTABLE FLOODLIGHT
LED DIRECT AC

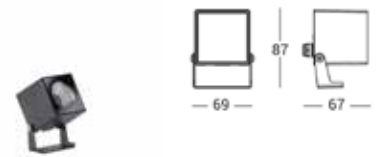

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
2107W/WCACNB	 STRETTO/20° NARROW/20°	7W	680 lm	476 lm	220-240Vac 50/60Hz	I	66	07	>80
2107W/WCACWB	 LARGO/40° WIDE/40°	7W	680 lm	476 lm	220-240Vac 50/60Hz	I	66	07	>80

VETRO EXTRACHIARO TRASPARENTE TEMPRATO - EXTRA CLEAR TRANSPARENT TEMPERED GLASS
ON/OFF

ACCESSORI
ACCESSORIES

KIT.022	KIT PICCHETTO PER PROIETTORE FLOODLIGHT SPIKE KIT	MOR685P/3VS	SCATOLA DI CONNESSIONE IP68 5POLI/3VIE 5 X 4 MM² CONNECTION BOX IP68 5POLES/3WAYS 5 X 4 MM²
AC2106	VISIERA ANTIABBAGLIAMENTO PER KUBO6 ANTI-GLARE VISOR FOR KUBO6	MOR685P/4VS	SCATOLA DI CONNESSIONE IP68 5POLI/4VIE 5 X 4 MM² CONNECTION BOX IP68 5POLES/4WAYS 5 X 4 MM²
KIT.036	BRACCIO PER ESTENSIONE A PARETE EXTENSION ARM FOR WALL	E.TRA.580	LIMITATORE DI SOVRATENSIONE CL I - IP67 SURGE PROTECTOR CL I - IP67
MOR683P/2V	CONNETTORE IP68 3POLI/2VIE 3 X 2.5 MM² CONNECTOR IP68 3POLES/2WAYS 3 X 2.5 MM²		

ACCESSORI

ACCESSORIES

CONNETTORI

CONNECTORS



MOR682P/2V

Connettore IP68 2Poli/2Vie 2 x 1 mm²
Connector IP68 2Poles/2Ways 2 x 1 mm²
 L 72 x Ø 22



MOR683P/2V

Connettore IP68 3Poli/2Vie 3 x 2.5 mm²
Connector IP68 3Poles/2Ways 3 x 2.5 mm²
 L 95 x Ø 31



MOR685P/3VS

Scatola di connessione IP68 5Poli/3Vie 5 x 4 mm²
Connection Box IP68 5Poles/3Ways 5 x 4 mm²
 L 127 x W 93 x H 35



MOR685P/4VS

Scatola di connessione IP68 5Poli/4Vie 5 x 4 mm²
Connection Box IP68 5Poles/4Ways 5 x 4 mm²
 L 113 x W 93 x H 35

FISSAGGIO

FIXING



KIT.022

Kit picchetto per proiettore
Floodlight Spike Kit
 L 40 x W 30 x H 235



KIT.036

Braccio per estensione a parete
Extension arm for wall
 L 500

VISIERE

VISORS



AC2106

Visiera antiabbagliamento per Kubo6
Anti-glare visor for Kubo6
 L 65 x H 65

PROTEZIONE ALLE SOVRATENSIONI

SURGE PROTECTOR




E.TRA.580

Limitatore di sovratensione CL I - IP67
Surge protector CL I - IP67
 L 37 x W 30 x H 30

ALIMENTATORI 24Vdc

DRIVER 24Vdc

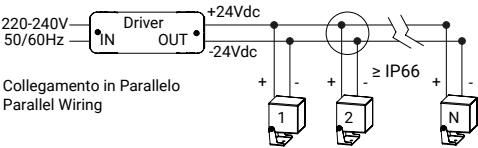

E.TRA.577 Alimentatore ON/OFF 25W 24Vdc IP67
1 Driver for 1-3 Lamps
Driver ON/OFF 25W 24Vdc IP67
L 148 x W 40 x H 32



E.TRA.579 Alimentatore ON/OFF 100W 24Vdc IP67
1 Driver for 4-14 Lamps
Driver ON/OFF 100W 24Vdc IP67
L 140 x W 63 x H 32



E.TRA.631 Alimentatore ON/OFF 15W 24Vdc IP20
1 Driver for 1-2 Lamps
Driver ON/OFF 15W 24Vdc IP20
L 106 x W 33 x H 22



E.TRA.632 Alimentatore ON/OFF 70W 24Vdc IP20
1 Driver for 1-10 Lamps
Driver ON/OFF 70W 24Vdc IP20
L 124 x W 80 x H 22

HUB - SISTEMI DI CONNESSIONE SEMPLIFICATA 24Vdc

HUB - READY TO CONNECT SYSTEM 24Vdc



HUB.24V.001.ND Hub 70W 24Vdc IP66 ON/OFF
1 Hub for 1-8 Lamps
Hub 70W 24Vdc IP66 ON/OFF
L 235 x W 200 x H 92

