



POCKET

Segnapasso per esterno
Outdoor step light

DESCRIZIONE DESCRIPTION

La nuova linea di segnapasso per esterno, è stato concepito con un occhio attento alla cura del dettaglio. Riconosciamo che ogni spazio è unico, motivo per cui Pocket è disponibile in tre dimensioni diverse: sia che si tratti di illuminare un giardino, un vialetto o un percorso pedonale, la nostra gamma soddisfa tutte le esigenze. La sua forma compatta non compromette la sua efficacia. Oltre alla sua estetica accattivante, la nostra linea di segnapasso offre funzionalità avanzate per migliorare la vostra esperienza all'aperto. Può essere agevolmente fissato alla tradizionale scatola di derivazione elettrica o installato in superficie.

Pocket, the new outdoor step light line, has been conceived with an eye to detail. We recognize that each space is unique, which is why Pocket is available in three different sizes: whether it is lighting a garden, a driveway or a pedestrian path, our range meets all needs. Its compact shape does not compromise its effectiveness. In addition to its eye-catching aesthetic, our line of step light offers advanced features to enhance your outdoor experience. It can be easily fixed to the traditional electrical junction box or installed on the surface.

INSTALLAZIONE INSTALLATION

Incasso a parete

Wall recessed

CORPO BODY

Alluminio pressofuso

Die-cast aluminium

SCHERMO SCREEN

Vetro puntinato

Pointed glass

VITERIA SCREWS

Acciaio inox A2

Stainless steel A2

VERNICIATURA FINISHING

Polvere poliestere stabilizzata ai raggi UV con trattamento anticorrosione

Anti-corrosive UV stabilized polyester powder







**CONFIG.
CODICE**
CODE
CONFIG.


▲ → **H=2700K**
W=3000K
N=4000K

L → 90
160
230

**VERSIONE IN
TENSIONE**
CONSTANT
VOLTAGE


2W-6W CON DRIVER REMOTO 24Vdc
2W-6W REMOTE DRIVER 24Vdc

—25—



90

———— L ————



IP 65


IK 07



**HUB
SYSTEM**

SEGNAPASSO PICCOLO

STEP LIGHT SMALL

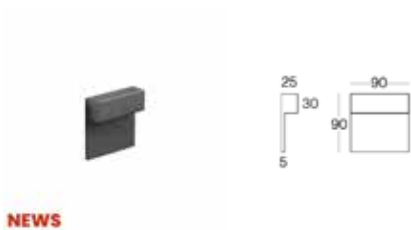

NEWS

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
9200R/▲RRCVT	 DIFFUSO DIFFUSED	2W	280 lm	160 lm	24Vdc	III	65	07	80

VETRO PUNTINATO 4 MM - POINTED GLASS 4 MM

DIMMERABILE - DIMMABLE


ACCESSORI

ACCESSORIES

D.BOX.034.XX	BOX DA INCASSO STANDARD 502 STANDARD RECESSED BOX 502	E.TRA.579 1 DRIVER FOR 1-30 LAMPS	ALIMENTATORE ON/OFF 100W 24VDC IP67 DRIVER ON/OFF 100W 24VDC IP67
E.TRA.646	ALIMENTATORE PER BOX 4W 24VDC IP65 - ON/OFF DRIVER FOR BOX 4W 24VDC IP65 - ON/OFF	E.TRA.633 1 DRIVER FOR 1-30 LAMPS	ALIMENTATORE DALI 100W 24VDC IP67 DRIVER DALI 100W 24VDC IP67
E.TRA.631 1 DRIVER FOR 1-6 LAMPS	ALIMENTATORE ON/OFF 15W 24VDC IP20 DRIVER ON/OFF 15W 24VDC IP20	HUB.24V.001.ND 1 HUB FOR 1-8 LAMPS	HUB 70W 24VDC IP66 ON/OFF HUB 70W 24VDC IP66 ON/OFF
E.TRA.632 1 DRIVER FOR 1-25 LAMPS	ALIMENTATORE ON/OFF 70W 24VDC IP20 DRIVER ON/OFF 70W 24VDC IP20	HUB.24V.001.CA 1 HUB FOR 1-8 LAMPS	HUB 70W 24VDC IP66 CASAMBI HUB 70W 24VDC IP66 CASAMBI
E.TRA.577 1 DRIVER FOR 1-8 LAMPS	ALIMENTATORE ON/OFF 25W 24VDC IP67 DRIVER ON/OFF 25W 24VDC IP67	HUB.24V.001.DA2 1 HUB FOR 1-8 LAMPS	HUB 70W 24VDC IP66 DALI-2 HUB 70W 24VDC IP66 DALI-2

SEGNAPASSO MEDIO

STEP LIGHT MEDIUM

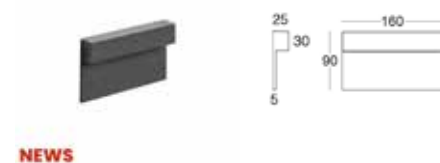

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
9201R/▲RRCVT	 DIFFUSO DIFFUSED	4W	560 lm	310 lm	24Vdc	III	65	07	80

VETRO PUNTINATO 4 MM - POINTED GLASS 4 MM

DIMMERABILE - DIMMABLE

ACCESSORI

ACCESSORIES

D.BOX.035.XX	BOX DA INCASSO STANDARD 503 STANDARD RECESSED BOX 503	E.TRA.579 1 DRIVER FOR 1-15 LAMPS	ALIMENTATORE ON/OFF 100W 24VDC IP67 DRIVER ON/OFF 100W 24VDC IP67
D.BOX.036.XX	BOX DA INCASSO STANDARD 504 STANDARD RECESSED BOX 504	E.TRA.633 1 DRIVER FOR 1-15 LAMPS	ALIMENTATORE DALI 100W 24VDC IP67 DRIVER DALI 100W 24VDC IP67
E.TRA.647	ALIMENTATORE PER BOX 12W 24VDC IP65 - ON/OFF DRIVER FOR BOX 12W 24VDC IP65 - ON/OFF	HUB.24V.001.ND 1 HUB FOR 1-8 LAMPS	HUB 70W 24VDC IP66 ON/OFF HUB 70W 24VDC IP66 ON/OFF
E.TRA.631 1 DRIVER FOR 1-3 LAMPS	ALIMENTATORE ON/OFF 15W 24VDC IP20 DRIVER ON/OFF 15W 24VDC IP20	HUB.24V.001.CA 1 HUB FOR 1-8 LAMPS	HUB 70W 24VDC IP66 CASAMBI HUB 70W 24VDC IP66 CASAMBI
E.TRA.632 1 DRIVER FOR 1-12 LAMPS	ALIMENTATORE ON/OFF 70W 24VDC IP20 DRIVER ON/OFF 70W 24VDC IP20	HUB.24V.001.DA2 1 HUB FOR 1-8 LAMPS	HUB 70W 24VDC IP66 DALI-2 HUB 70W 24VDC IP66 DALI-2
E.TRA.577 1 DRIVER FOR 1-4 LAMPS	ALIMENTATORE ON/OFF 25W 24VDC IP67 DRIVER ON/OFF 25W 24VDC IP67		

SEGNAPASSO GRANDE

STEP LIGHT BIG



NEWS

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
9202R/▲RRCVT	 DIFFUSO DIFFUSED	6W	840 lm	460 lm	24Vdc	III	65	07	80

VETRO PUNTINATO 4 MM - POINTED GLASS 4 MM

DIMMERABILE - DIMMABLE

ACCESSORI

ACCESSORIES

D.BOX.035.XX	BOX DA INCASSO STANDARD 503 STANDARD RECESSED BOX 503	E.TRA.579 1 DRIVER FOR 1-10 LAMPS	ALIMENTATORE ON/OFF 100W 24VDC IP67 DRIVER ON/OFF 100W 24VDC IP67
D.BOX.036.XX	BOX DA INCASSO STANDARD 504 STANDARD RECESSED BOX 504	E.TRA.633 1 DRIVER FOR 1-10 LAMPS	ALIMENTATORE DALI 100W 24VDC IP67 DRIVER DALI 100W 24VDC IP67
E.TRA.647	ALIMENTATORE PER BOX 12W 24VDC IP65 - ON/OFF DRIVER FOR BOX 12W 24VDC IP65 - ON/OFF	HUB.24V.001.ND 1 HUB FOR 1-8 LAMPS	HUB 70W 24VDC IP66 ON/OFF HUB 70W 24VDC IP66 ON/OFF
E.TRA.631 1 DRIVER FOR 1-2 LAMPS	ALIMENTATORE ON/OFF 15W 24VDC IP20 DRIVER ON/OFF 15W 24VDC IP20	HUB.24V.001.CA 1 HUB FOR 1-8 LAMPS	HUB 70W 24VDC IP66 CASAMBI HUB 70W 24VDC IP66 CASAMBI
E.TRA.632 1 DRIVER FOR 1-8 LAMPS	ALIMENTATORE ON/OFF 70W 24VDC IP20 DRIVER ON/OFF 70W 24VDC IP20	HUB.24V.001.DA2 1 HUB FOR 1-8 LAMPS	HUB 70W 24VDC IP66 DALI-2 HUB 70W 24VDC IP66 DALI-2
E.TRA.577 1 DRIVER FOR 1-3 LAMPS	ALIMENTATORE ON/OFF 25W 24VDC IP67 DRIVER ON/OFF 25W 24VDC IP67		

ACCESSORI

ACCESSORIES


BOX DA INCASSO

RECESSED BOXES

	D.BOX.034.XX	Box da incasso standard 502 <i>Standard recessed box 502</i> L 70 x W 50 x H 70
	D.BOX.035.XX	Box da incasso standard 503 <i>Standard recessed box 503</i> L 108 x W 53 x H 74
	D.BOX.036.XX	Box da incasso standard 504 <i>Standard recessed box 504</i> L 133 x W 53 x H 74

ALIMENTATORI 24Vdc

DRIVER 24Vdc

 Collegamento in Parallelo Parallel Wiring		E.TRA.577 Cod. 9200R - 1 Driver for 1-8 Lamps Cod. 9201R - 1 Driver for 1-4 Lamps Cod. 9202R - 1 Driver for 1-3 Lamps	Alimentatore ON/OFF 25W 24Vdc IP67 <i>Driver ON/OFF 25W 24Vdc IP67</i> L 148 x W 40 x H 32
		E.TRA.579 Cod. 9200R - 1 Driver for 1-30 Lamps Cod. 9201R - 1 Driver for 1-15 Lamps Cod. 9202R - 1 Driver for 1-10 Lamps	Alimentatore ON/OFF 100W 24Vdc IP67 <i>Driver ON/OFF 100W 24Vdc IP67</i> L 140 x W 63 x H 32
		E.TRA.631 Cod. 9200R - 1 Driver for 1-6 Lamps Cod. 9201R - 1 Driver for 1-3 Lamps Cod. 9202R - 1 Driver for 1-2 Lamps	Alimentatore ON/OFF 15W 24Vdc IP20 <i>Driver ON/OFF 15W 24Vdc IP20</i> L 106 x W 33 x H 22
		E.TRA.632 Cod. 9200R - 1 Driver for 1-25 Lamps Cod. 9201R - 1 Driver for 1-12 Lamps Cod. 9202R - 1 Driver for 1-8 Lamps	Alimentatore ON/OFF 70W 24Vdc IP20 <i>Driver ON/OFF 70W 24Vdc IP20</i> L 124 x W 80 x H 22
		E.TRA.633 Cod. 9200R - 1 Driver for 1-30 Lamps Cod. 9201R - 1 Driver for 1-15 Lamps Cod. 9202R - 1 Driver for 1-10 Lamps	Alimentatore DALI 100W 24Vdc IP67 <i>Driver DALI 100W 24Vdc IP67</i> L 175 x W 63 x H 36
		E.TRA.646	Alimentatore per Box 4W 24Vdc IP65 - ON/OFF <i>Driver for Box 4W 24Vdc IP65 - ON/OFF</i> L 43 x W 29.5 x H 22
		E.TRA.647	Alimentatore per Box 12W 24Vdc IP65 - ON/OFF <i>Driver for Box 12W 24Vdc IP65 - ON/OFF</i> L 57 x W 40 x H 26

HUB - SISTEMI DI CONNESSIONE SEMPLIFICATA 24Vdc

HUB - READY TO CONNECT SYSTEM 24Vdc



HUB.24V.001.ND

Cod. 9200R - 1 Hub for 1-8 Lamps
Cod. 9201R - 1 Hub for 1-8 Lamps
Cod. 9202R - 1 Hub for 1-8 Lamps

Hub 70W 24Vdc IP66 ON/OFF

Hub 70W 24Vdc IP66 ON/OFF

L 235 x W 200 x H 92



HUB.24V.001.DA2

Cod. 9200R - 1 Hub for 1-8 Lamps
Cod. 9201R - 1 Hub for 1-8 Lamps
Cod. 9202R - 1 Hub for 1-8 Lamps

Hub 70W 24Vdc IP66 DALI-2

Hub 70W 24Vdc IP66 DALI-2

L 235 x W 200 x H 92



HUB.24V.001.CA

Cod. 9200R - 1 Hub for 1-8 Lamps
Cod. 9201R - 1 Hub for 1-8 Lamps
Cod. 9202R - 1 Hub for 1-8 Lamps

Hub 70W 24Vdc IP66 CASAMBI

Hub 70W 24Vdc IP66 CASAMBI

L 235 x W 200 x H 92

